


# Portable Conditioner

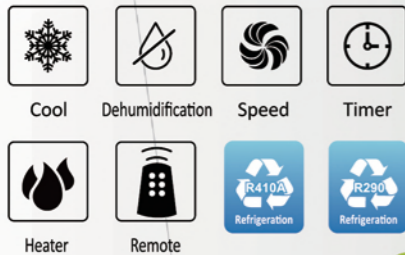

SKY-1A

### Feature

- Classic model; ERP CLASS A
- 3 function in 1 (Air conditioner/ dehumidification/heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 5000-10000 BTU For Option
- No water out when cooling
- Power cord is easy to store
- Refrigerant: R410A/R290
- Auto close the air outlet
- Over-cold prevention function
- Remote control; LED Display


Model 220-240V,50Hz	SKY-1A05 SKYR-1A05 (5000Btu/h)	SKY-1A07 SKYR-1A07 (7000Btu/h)	SKY-1A08 SKYR-1A08 (8000Btu/h)	SKY-1A09 SKYR-1A09 (9000Btu/h)
EER class	A	A	A	A
Cooling Capacity	1460W	2000W	2344W	2600W
Heating Capacity	1480W	2000W	2344W	2600W
Rating Input(cooling)	555W	780W	880W	985W
Rating Input(heating)	580W	760W	1010W	965W
Refrigerant	R410A	R410A	R410A	R410A
Moisture	0.7L/H	0.8L/H	0.9L/H	1.2L/H
Noise Level(high)	≦64db(A)	≦64db(A)	≦64db(A)	≦65db(A)
Air Volume(m <sup>3</sup> /h)	300m <sup>3</sup> /h	300m <sup>3</sup> /h	320m <sup>3</sup> /h	320m <sup>3</sup> /h
Application Area(m <sup>2</sup> )	8~12m <sup>2</sup>	10~16m <sup>2</sup>	10~16m <sup>2</sup>	12~18m <sup>2</sup>
N.W/G.W.(kg)	21/22	22/23	21/23	23/24
Exhaust pipe	Ø150			
Unit Dimension(mm)	330L*292W*686.5H			
Package Dimension(mm)	379L*336W*867H			
Loading Qty per 20'/40'/40'HQ	204/420/628 Sets			



PORTABLE

AIR CONDITIONER

NEW FUNCTION

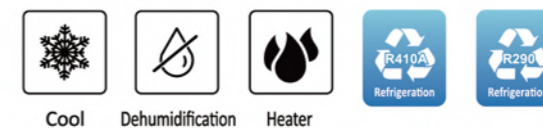

### United Star Industrial Group Limited.

Room 1201-1202 Hongfui int '1' building No.313 YanjiangZhong Road, Guangzhou,China  
 Factory address: No.268 donglu road dongfeng town Zhongshang China.  
 Tel: 0086-20-2226 5052/2226 5066 / 2226 5051 Fax: 0086-20-2226 5070  
 Mob/Whatapp/Wechat: 0086-13556009681 Zip: 510000  
 E-mail: info@unitedstar.cc  
 sale@unitedstar.cc



www.unitedstar.cc  
 facebook:https://www.facebook.com/chinaUnitedStar/

Specifications are subject to change without prior notice  
 Product colours may vary from pictures shown



# Function

## Powerful Motor

With full copper wire motor, the operation is even and stable. Large blade design for smooth air supply and higher efficiency.



## Local Cooling & Easily Move

Strong cooling, improve heat transfer efficiency, and cool down instantaneously. Move freely and control temperature anywhere.



## Intelligent Remote Control

Remote control for easy adjustment.



## Timing Setting

Timing setting 0-24 hours, freely reserve the wind speed and temperature, automatically shut down when it arrives.



## Energy Saving

Increase energy efficiency and reduce power consumption with energy efficient compressors and heat exchangers.



## Rotary compressor

Flattened pump body design with new slot motor for more efficient power during operation.

Environmentally-friendly  
Save worry




## Environmentally-friendly


Using R290 refrigerant, green and environmentally friendly, returning to nature and beauty.

## Heat Exchanger

Double heat exchanger, can effectively improve heat exchange efficiency and defrosting speed, large area cooling.

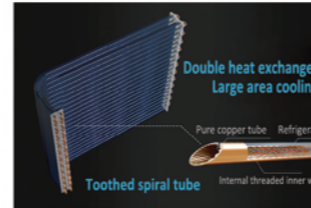

Easy to install  
No need to punch

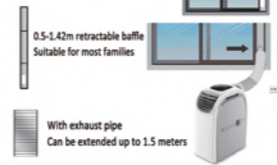

## Easy to Install

0.5-1.42m retractable baffle, suitable for most families. With exhaust pipe, can be extended up to 1.5 meters.

# Portable Conditioner



SKY-1B

## Feature

- 3 function in 1 (Air conditioner/dehumidification/heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 5000-10000 BTU For Option
- No water out when cooling
- Refrigerant: R410A/R290
- Over-cold prevention function
- Remote control; LED Display

Model 220-240V, 50Hz	SKY-1B05C SKYR-1B05 (5000Btu/h)	SKY-1B07C SKYR-1B07 (7000Btu/h)	SKY-1B08C SKYR-1B08 (8000Btu/h)	SKY-1B09C SKYR-1B09 (9000Btu/h)
EER class	A	A	A	A
Cooling Capacity	1460W	2000W	2344W	2600W
Heating Capacity	1460W	2000W	2344W	2600W
Rating Input(cooling)	555W	780W	880W	985W
Rating Input(heating)	580W	760W	1010W	965W
Refrigerant	R410A	R410A	R410A	R410A
Moisture	0.7L/H	0.8L/H	0.9L/H	1.2L/H
Noise Level(high)	≦64db(A)	≦64db(A)	≦64db(A)	≦65db(A)
Air Volume(m3/h)	300m <sup>3</sup> /h	300m <sup>3</sup> /h	320m <sup>3</sup> /h	320m <sup>3</sup> /h
Application Area(m2)	8-12m <sup>2</sup>	10-16m <sup>2</sup>	10-16m <sup>2</sup>	12-18m <sup>2</sup>
N.W./G.W.(kg)	21/22	22/23	21/23	23/24
Exhaust pipe	Ø150			
Unit Dimension(mm)	330L*292W*704H			
Package Dimension(mm)	379L*336W*882H			
Loading Qty per 20' /40' /40'HQ	204/420/628 Sets			

# Portable Conditioner



SKY-5A

## Feature

- Commercial model
- 3 function in 1 (Air conditioner/dehumidification/heater)
- 24-hour timer setting
- Easy to install
- Two drain pipe, dehumidification are separate drain water
- 9000-12000 BTU For Option
- No water out when cooling
- Double motor, easy cooling
- Refrigerant: R410A/R290
- IPX24, Out door using
- Over-cold prevention function
- Remote control; LED Display

Model 220-240V, 50Hz	SKY-5A09 SKYR-5A09 (9000Btu/h)	SKY-5A10.5 SKYR-5A10.5 (10500Btu/h)	SKY-5A12 SKYR-5A12 (12000Btu/h)
EER class	A	A	A
Cooling Capacity	2600W	3080W	3500W
Heating Capacity	2400W	3000W	3500W
Rating Input(cooling)	910W	1050W	1340W
Rating Input(heating)	870W	1000W	1000W
Refrigerant	R410A	R410A	R410A
Moisture	1.0L/H	1.2L/H	1.3L/H
Noise Level(high)	≦65db(A)	≦65db(A)	≦65db(A)
Air Volume(m3/h)	350m <sup>3</sup> /h	350m <sup>3</sup> /h	350m <sup>3</sup> /h
Application Area(m2)	16-18m <sup>2</sup>	18-20m <sup>2</sup>	20-22m <sup>2</sup>
N.W./G.W.(kg)	33/35	33/35	33/35
Exhaust pipe	Ø150		
Unit Dimension(mm)	571L*326W*770H		
Package Dimension(mm)	638L*368W*948H		
Loading Qty per 20' /40' /40'HQ	110/228/228 Sets		



Model 115V, 50Hz	SKY-5A10.5C SKYR-5A10.5 (10500Btu/h)	SKY-5A12 SKYR-5A12 (12000Btu/h)	SKY-5A14C SKYR-5A14 (14000Btu/h)
EER class	A	A	A
Cooling Capacity	3080W	3500W	4100W
Heating Capacity	3000W	3200W	3600W
Rating Input(cooling)	1050W	1180W	1360W
Rating Input(heating)	1000W	1100W	1280W
Refrigerant	R410A	R410A	R410A
Moisture	1.2L/H	1.4L/H	1.6L/H
Noise Level(high)	≦65db(A)	≦65db(A)	≦65db(A)
Air Volume(m3/h)	350m <sup>3</sup> /h	350m <sup>3</sup> /h	400m <sup>3</sup> /h
Application Area(m2)	16-20m <sup>2</sup>	18-25m <sup>2</sup>	20-28m <sup>2</sup>
N.W./G.W.(kg)	33/35	33/35	33/35
Exhaust pipe	Ø150		
Unit Dimension(mm)	571L*326W*770H		
Package Dimension(mm)	638L*368W*948H		
Loading Qty per 20' /40' /40'HQ	110/228/228 Sets		

