


TOP JOY TENT FLOORING

Model:CI-CY001-110g

FEATURES AND BENEFITS

Easy to Install, Dissemble and Store

TopJoy Tent Flooring provides a perfect temporary flooring solution due to its easy installation and removal feature. Its interlocking design ensures individual tiles to connect on every edge to create a seamless event surface. Assembled in panels, the flooring can be rolled, allowing for easy transportation and storage.

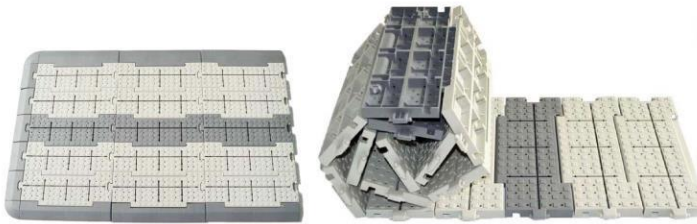

With the advantages of easy installation,
Can be rolled up when not in use.

Durable and Reusable

With high-impact polypropylene raw material and strong base structure, TopJoy Tent Flooring provides the durability that you can rely on for each event, protecting your turf and transforming your venue for events of various sizes.



INSTALLATION

Fast and Easy Installation

TopJoy Tent Floor Tiles come pre-assembled in sections that allows for easy transport and storage. Sections can be positioned into place using a simple step or other downward pressure. Once modules are connected, they create a seamless professional tent flooring. Thousands of square feet of event flooring can be installed quickly and easily with minimal labor.

Installation Times

Area (sq/ft) Time to Install

400	10 minutes – 1 person
2,400	0.8 hour – 2 people
10,000	2.5 hours – 4 people
60,000	7 hours – 14 people

*Note: Times may vary depending on site access and equipment.





SPECIFICATION

Module Size: 4" W x 12" L x 0.72" H (10.16 cm x 30.48 cm x 1.8 cm).
Pre-assembled in panels

Edging Specifications: Long edging size is 30.48cm x 6cm x 1.8cm (12" x 2.36" x 0.71"). Short edging size is 10.16cm x 6cm x 1.8cm (4" x 2.36" x 0.71"). Edging is designed to attach to flooring modules both lengthwise and widthwise, providing a gradual tapered edge. Edging extends from end of flooring module and then slopes down to ground.

Material: High-impact polypropylene

Weight: 0.72 lbs/sq ft (3.54 kg/sq meter)

Weight Load: 1,645 lbs/sq ft (8,000 kg/sq meter) static load, solid sub-surface

Warranty: 3-year warranty against manufacturer's defects

Fire Rating: Efl according to EN 13501-1 standard. TopJoy Tent Flooring meets applicable standards for temporary floor covers.

Melting Point: 320° Fahrenheit / 160° Celsius

Operating Range: -13°F – 149°F / -25° C – 65°C

Shipping Recommendation

Tent flooring comes in cartons and partially assembled in sheet form. Sections may then be assembled into large or small rolls, depending on the intended use.

Carton Size: 94.5cm*66.5cm*32.5cm (37.2" x 26.2" x 12.8")

Packing: 324 pcs/ctn, 32.14 pcs/sq meter, 10.08 sqm/ctn(108.5 sq ft/ctn)

Ocean Container Quantities

20' FC Ocean Container 1,300 sqm (13,993 sq ft)

40' HC Ocean Container 3,000 sqm (32,292 sq ft)