


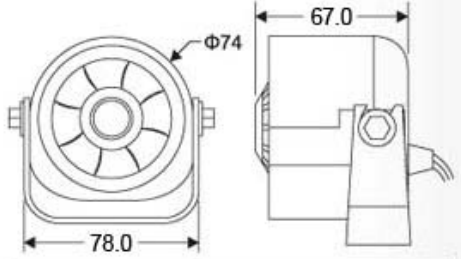

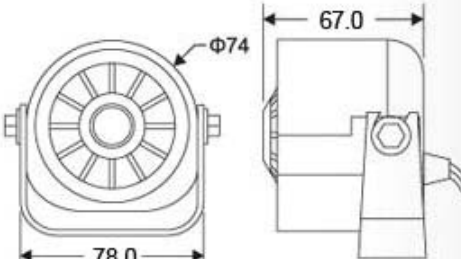

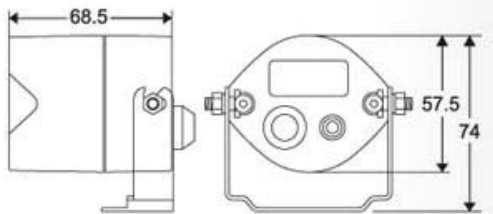

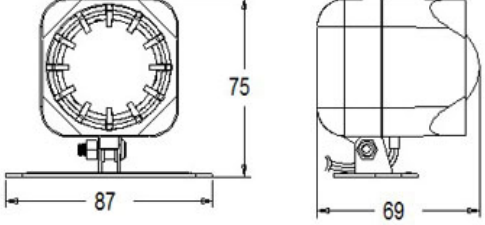

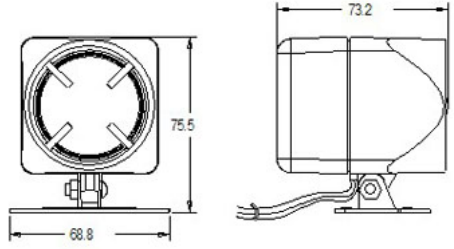
Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-201</p>	<p>Product Specifications: Operating Voltage:DC12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Neodymium/Ferrite Voice Coil:25.5mm/19.5mm Material: ABS Packing Details:80PCS/0.055CBM</p>	
 <p>ES-202</p>	<p>Product Specifications: Operating Voltage:DC12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Ferrite Voice Coil:19.5mm Material: ABS Packing Details:80PCS/0.046CBM</p>	
 <p>ES-203</p>	<p>Product Specifications: Operating Voltage:DC12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Neodymium/Ferrite Voice Coil:25.5mm/19.5mm Material: ABS Packing Details:80PCS/0.055CBM</p>	
 <p>ES-204</p>	<p>Product Specifications: Operating Voltage:DC12v/24v Rated Output Power:15w/20w SPL:113 DB/ 116DB Sound Type:1tone/6tone Magnet: Ferrite Voice Coil: 19.5mm Material: ABS Packing Details:80PCS/0.06CBM</p>	
 <p>ES-205</p>	<p>Product Specifications: Operating Voltage:DC12v/24v Rated Output Power:15w/20w SPL:113 DB/ 116DB Sound Type:1tone/6tone Magnet: Neodymium/Ferrite Voice Coil:25.5mm/19.5mm Material: ABS Packing Details:80PCS/0.055CBM</p>	


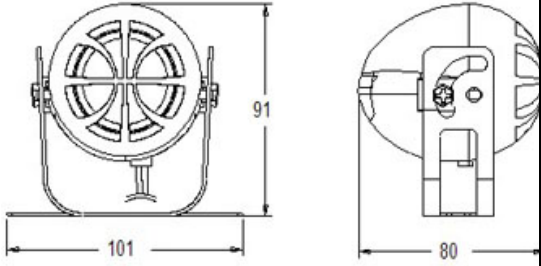
Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-206</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Neodymium/Ferrite Voice Coil:25.5mm/19.5mm Material: ABS Packing Details:80PCS/0.055CBM</p>	
 <p>ES-207</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Neodymium/Ferrite Voice Coil:25.5mm/19.5mm Material: ABS Packing Details:80PCS/0.055CBM</p>	
 <p>ES-208</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:113 DB/ 116DB Sound Type:1tone/6tone Magnet: Ferrite Voice Coil: 19.5mm Material: ABS Packing Details:80PCS/0.05CBM</p>	
 <p>ES-209</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w/25w SPL:116 DB/ 119DB/120DB Sound Type:1tone/6tone Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:50PCS/0.055CBM</p>	
 <p>ES-210</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:113 DB/ 116DB Sound Type:1tone/6tone Magnet: Ferrite Voice Coil: 18.3mm Material: ABS Packing Details:80PCS/0.05CBM</p>	

Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-211</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Neodymium Voice Coil:25.5mm Material: ABS Packing Details:80PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-211 siren. Dimensions include a diameter of $\Phi 74$, a width of 78.0, and a height of 67.0.</p>
 <p>ES-212</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Neodymium Voice Coil:25.5mm Material: ABS Packing Details:80PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-212 siren. Dimensions include a diameter of $\Phi 74$, a width of 78.0, and a height of 67.0.</p>
 <p>ES-213</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Neodymium Voice Coil:25.5mm Material: ABS Packing Details:80PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-213 siren. Dimensions include a width of 68.5, a height of 74, and a mounting hole offset of 57.5.</p>
 <p>ES-214</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:113 DB/ 116DB Sound Type:1tone/6tone Magnet: Ferrite Voice Coil: 18.3mm Material: ABS Packing Details:80PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-214 siren. Dimensions include a diameter of 87, a height of 75, and a width of 69.</p>
 <p>ES-215</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:113 DB/ 116DB Sound Type:1tone/6tone Magnet: Ferrite Voice Coil: 18.3mm Material: ABS Packing Details:80PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-215 siren. Dimensions include a diameter of 75.5, a width of 68.8, and a total width of 73.2.</p>


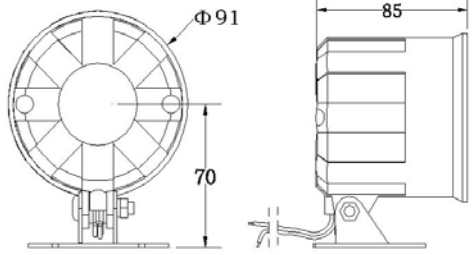

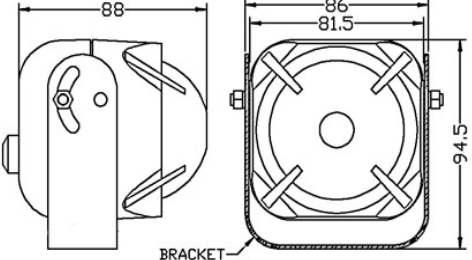

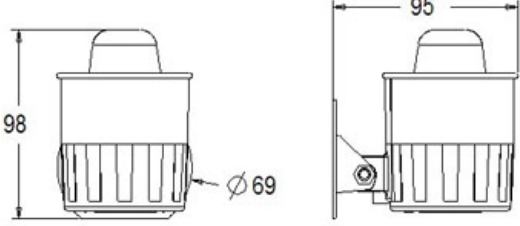

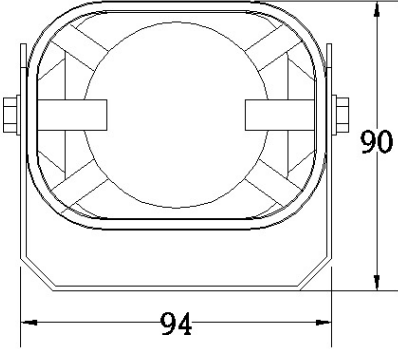

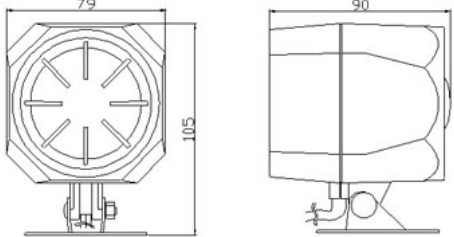
Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-216</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:112 DB/ 115DB Sound Type:1tone/6tone Magnet: Ferrite Voice Coil: 18.3mm Material: ABS Packing Details:80PCS/0.06CBM</p>	
 <p>ES-217</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w SPL:115 DB/ 118DB Sound Type:1tone/6tone Magnet: Neodymium Voice Coil:25.5mm Material: ABS Packing Details:80PCS/0.055CBM</p>	
 <p>ES-218</p>	<p>Voltage: DC12V or DC 24V Rated Output Power: 15W / 20W SPL:115dB / 118Db Sound Type: 1 tone / 6 tones Magnet: Neodymium Voice Coil:25.5mm Packing: 80PCS/cartons (0.055CBM) 11, CE , ROHS</p>	
 <p>ES-219</p>	<p>Voltage: DC12V or DC 24V Rated Output Power: 15W / 20W SPL:115dB / 118Db Sound Type: 1 tone / 6 tones Magnet: Neodymium Voice Coil:25.5mm Packing: 80PCS/cartons (0.055CBM) 11, CE , ROHS</p>	
 <p>ES-220</p>	<p>Product Specifications: Operating Voltage:DC 12v/24v Rated Output Power:15w/20w Sound Type:1tone/6tone Magnet: Ferrite Voice Coil: 18.3mm Material: ABS Packing Details:80PCS/0.05CBM</p>	

Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-301</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:50PCS/0.06CBM</p>	
 <p>ES-302</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:115 dB/ 118dB/119dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	
	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:115 dB/ 118dB/119dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:50PCS/0.06CBM</p>	
 <p>ES-304</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W SPL:115 dB/ 118dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:50PCS/0.05CBM</p>	
 <p>ES-305</p>	<p>Product Specifications: Operating Voltage:12v/24v Rated Output Power:15w/20w/25w SPL:115 dB/ 118dB/119dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	


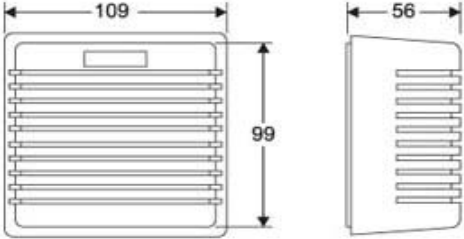
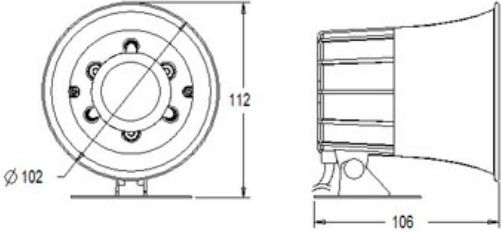

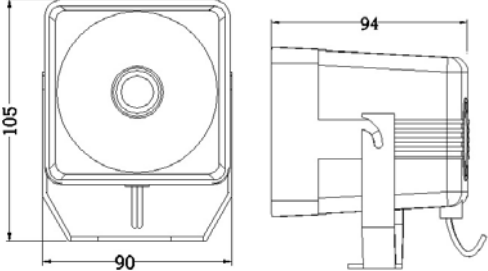

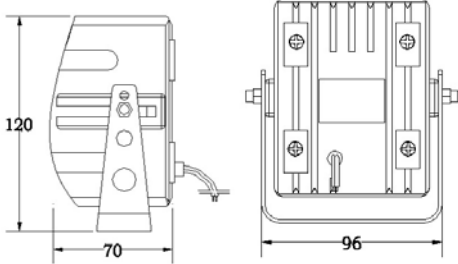
Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-306</p>	<p>Product Specifications: Operating Voltage:12v/24v Rated Output Power:15w/20w/25w SPL:115 dB/ 118dB/119dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	 <p>Technical drawing showing front and side views of the ES-306 siren. Dimensions include a diameter of $\Phi 91$, a height of 70, and a width of 85.</p>
 <p>ES-307</p>	<p>Product Specifications: Operating Voltage:12v/24v Rated Output Power:15w/20w/25w SPL:115 dB/ 118dB/119dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.07CBM</p>	 <p>Technical drawing showing front and side views of the ES-307 siren. Dimensions include a width of 88, a height of 94.5, and a diameter of 86. A bracket is also indicated.</p>
 <p>ES-308</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W SPL:115 dB/ 118dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:50PCS/0.05CBM</p>	 <p>Technical drawing showing front and side views of the ES-308 siren. Dimensions include a height of 98, a width of 95, and a diameter of $\Phi 69$.</p>
 <p>ES-309</p>	<p>Product Specifications: Operating Voltage:DC12V/24V Rated Output Power:15W/20W SPL:116 DB/ 119DB Sound Type:1tone/6 tones Magnet: Neodymium/Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	 <p>Technical drawing showing front and side views of the ES-309 siren. Dimensions include a width of 94 and a height of 90.</p>
 <p>ES-310</p>	<p>Product Specifications: Operating Voltage:12v/24v Rated Output Power:15w/20w/25w SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS</p>	 <p>Technical drawing showing front and side views of the ES-310 siren. Dimensions include a width of 79, a height of 105, and a diameter of 90.</p>


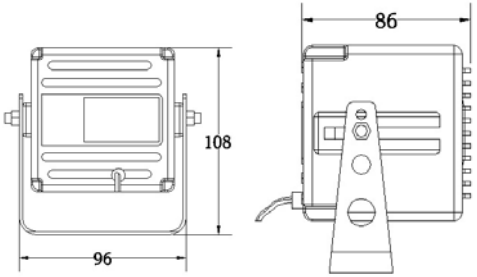

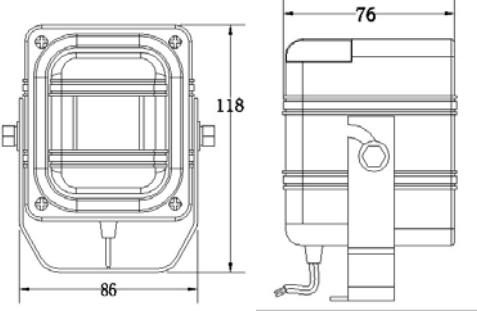

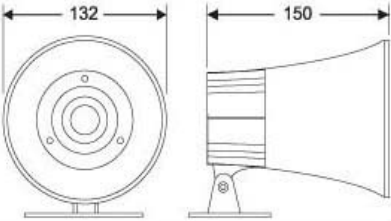


Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-311</p>	<p>Packing Details:40PCS/0.06CBM</p> <p>Product Specifications: Operating Voltage:12v/24v Rated Output Power:15w/20w/25w SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:50PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-311 siren. Dimensions include a diameter of 85mm, a height of 101mm, and a width of 94mm.</p>
 <p>ES-312</p>	<p>Product Specifications: Operating Voltage:12v/24v Rated Output Power:15w/20w/25w SPL:115 dB/ 118dB/119dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-312 siren. Dimensions include a width of 97mm, a height of 102mm, and a depth of 77mm.</p>
 <p>ES-313</p>	<p>Product Specifications: Operating Voltage:12v/24v Rated Output Power:15w/20w/25w SPL:115 dB/ 118dB/119dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-313 siren. Dimensions include a width of 75mm, a height of 100mm, and a depth of 81mm.</p>
 <p>ES-401</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	 <p>Technical drawings showing front and side views of the ES-401 siren. Dimensions include a diameter of 101mm and a width of 105mm.</p>
	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:115 dB/ 118dB/119dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS</p>	 <p>Technical drawings showing front and side views of the ES-401 siren. Dimensions include a width of 108mm, a depth of 76mm, and a height of 79mm.</p>

Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

<p>ES-402</p>	<p>Packing Details:40PCS/0.06CBM</p>	
	<p>Product Specifications: Operating Voltage:12V Rated Output Power:15W SPL:108dB Sound Type:1tone/2 tones Magnet: Ferrite Voice Coil:19.4mm Material: ABS Packing Details:50PCS/0.06CBM</p>	
<p>ES-403</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	
 <p>ES-404</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	
 <p>ES-405</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	

Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-407</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	 <p>Technical drawing showing front and side views of the ES-407 siren. Dimensions: 96 (width), 108 (height), 86 (depth).</p>
 <p>ES-408</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:116 dB/ 119dB/120dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.06CBM</p>	 <p>Technical drawing showing front and side views of the ES-408 siren. Dimensions: 86 (width), 118 (height), 76 (depth).</p>
 <p>ES-501</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:118 dB/ 121dB/122dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.13CBM</p>	 <p>Technical drawing showing front and side views of the ES-501 siren. Dimensions: 132 (width), 150 (depth).</p>
 <p>ES-504</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:117 dB/ 120dB/121dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:40PCS/0.12CBM</p>	 <p>Technical drawing showing front and side views of the ES-504 siren. Dimensions: 123 (width), 115 (height).</p>

Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

 <p>ES-505</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:118 dB/ 121dB/122dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:24PCS/0.1CBM</p>	 <p>Technical drawing showing top and side views of the ES-505 siren. Dimensions include a diameter of $\Phi 132$ and a height of 70mm.</p>
 <p>ES-506</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:15W/20W/25W SPL:118 dB/ 121dB/122dB Sound Type:1tone/6 tones Magnet: Ferrite Voice Coil:25.5mm Material: ABS Packing Details:24PCS/0.1CBM</p>	
 <p>ES-508</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:30W/40W Current: 1200mA SPL:130dB / 131dB Sound Type: 2 tones(Dual tone) Voice Coil:33.5mm Material: ABS Packing Details:16PCS/0.13CBM CE & ROHS</p>	 <p>Technical drawing showing front and side views of the ES-508 siren. Dimensions include a width of 200mm and a height of 119mm.</p>
 <p>ES-711</p>	<p>Product Specifications: Operating Voltage:12V/24V Rated Output Power:30W/40W Current: 1200mA SPL:131dB / 132dB Sound Type: 2 tones(Dual tone) Voice Coil:33.5mm Material: ABS CE & ROHS Packing Details:12PCS/0.15CBM</p>	 <p>Technical drawing showing front and side views of the ES-711 siren. Dimensions include a width of 279mm and a height of 167mm.</p>

Memo:1) Coordinated with other equipment, these SIRENS can widely used in car alarm and home security system
 2) We offer FOB Ningbo price which is negotiable according to the order quantity you placed

Yuyao City Chebang Electronic Technology Co., Ltd.
ELECTRONIC SIREN

3) The package of SIRENS is flexible according to customers' requirements

Contact Details:

Company Name: Yuyao City Chebang Electronic Technology Co., Ltd

Add: Donglu Centre Road No.27, Dongpu Village, Simen Town, Yuyao City, Zhejiang Province, China.

Tel: +86-574-62506221, Fax: +86-574-62506296

ZIP: 315470

E-mail: chebang_sale@aliyu.com

<http://chebao.en.alibaba.com>

<http://www.chebaokj.com>