



VISBELLA[®]
Since 1996



PROFESSIONAL MANUFACTURER / FABRICANTES PROFESIONALES

AUTO ADHESIVE & CLEANER

AUTOADHESIVO Y LIMPIADOR

VISBELLA · U.S.A

QUALITY IS LIFE.

www.GNMgroup.cn www.visbella.com

Copyright 2019 All Rights Reserved.

Add: No. 1518, Mengxi Road, Huzhou Zhejiang China.

Tel: 86-572-2109399 Fax: 86-572-2352225

Email: Sales@visbella.com

QQ: 43934197



VISBELLA

Copyright 2019 All Rights Reserved

ABOUT US / SOBRE NOSOTROS



Zhejiang Guoneng Technology Co.,Ltd is one of the largest adhesive **manufacturers** in Zhejiang China. Excellent location for us to get more high quality resources such as raw materials, human capital and latest technology. The company covers an area of 12,000 square meters, with construction area of 8,000 square meters, is a company with an integration of science, industry and trade.

Zhejiang Guoneng Technology Co.,Ltd is equipped with advanced and safe facilities. We have been dedicated to R&D in production and distribution in the adhesive industry for more than 20 years. We are specializing in production of Building Adhesive and Auto spare parts sealant .

HPPP Service.
Honest-Prompt-Precise-Professional.
A Professional Sensitive Adhesives Partner that you can rely on.

Zhejiang Guoneng Technology Co.,Ltd es uno de los más grandes fabricantes de adhesivos en Zhejiang China. Una excelente Ubicación para nosotros para obtener una alta calidad en recursos tales como la materia prima, capital humano y las últimas tecnologías. La Compañia cubre una area de 12,000 metros cuadrados, con una área de construcción de 8,000 metros cuadrados, una compañía con una integración a la ciencia, industria y comercio.

Zhejiang Guoneng Technology Co.,Ltd cuenta con avanzadas y seguras instalaciones. Nosotros nos hemos dedicado para R&D en producción y distribución para la industria del adhesivo por más de 20 años. Nosotros somos especialistas en la producción de la construcción de adhesivos y sellador de respuestos de coches.

Hppp Servicios
Lealtad- Rápidez - Precisión- Profesionalidad
Una pareja profesional de Adhesivos sensibles sólo depende de tí



CONTENT / CONTENIDO

• AUTO SPARE SEALANT ----- 9

RTV Silicone / Gasket Maker / High-temp Resistant
 RTV Empaquetadora de Silicona resistente altas temperaturas
 Exhaust System / Tailpipe & Muffler Sealer Cement
 Sistema de escape / tubo de escape / Silenciador
 Gasket Shellac
 Pegamento
 Polyurethane Sealant
 Sellador de poliuretano
 Valve Grinding Compound
 Compuesto de molienda de válvulas
 Radiator Stop Leak

• DIY SERIES ----- 21

Rearview Mirror Adhesive
 Adhesivo para espejo retrovisor
 Speedy-fix Filling & Reinforcing Adhesive
 Relleno Rápido y pegamento reforzante
 5 Seconds UV Light Glue
 5 Segundos pegamento ultravioleta
 DIY Auto Windscreen Windshield Repair Kit
 DIY Kit de reparación de parabrisas
 DIY Rear Window Defogger Repair Kit
 DIY Kit reparador para desempanar ventanillas trasera
 DIY Leather & Vinyl Repair Kit
 DIY Kit de reparación de Piel y Vinilo
 DIY Headlight Restoration Kit
 Kit restaurador de Faros
 DIY Dent & Ding Repair Kit

Tire Repair Kit

DIY Fuel Tank & Radiator Repair Kit
 Reparador del depósito de combustible y radiador
 DIY Alloy Wheel Repair Kit
 DIY kit reparador de la Rueda de Aleación
 DIY Touch Screen Repair Kit

Plastic & Trim Restoration Kit

DIY Plastic Plate Polishing

Sew Glue Liquid

Goo Clean

Jelly Cleaning Gel

Alcohol Glue

MS Sealant

• BUILDING ADHESIVE ----- 53

General Purpose Silicone Sealant
 Sellador de Silicona para uso general
 Weather Proof Silicone Sealant
 Sellador de Silicona resistente a la intemperie
 PVA Glue

Thread Locker & Sealing (Anaerobic Sealant)
 Armario de rosca y sellado (sellador anaeróbico)
 Epoxy AB Glue
 Exposy (AB) Glue
 Epoxy Putty
 Resina masilla
 Super Glue
 Pegamento (Súper Glue)

• AUTO CARE PRODUCTS ----- 67

Grease

Grease/grasa

Brake Fluid

CAR Polish

Brake Cleaner Bremsen-reiniger
 Los frenos de la marca
 Carburetor & Choke Cleaner
 Limpiador electrónico
 Motor Flush

Electronic Cleaner
 Limpiador electrónico
 Fuel Injection Cleaner
 Limpiador inyector de combustible
 Spray White Lithium Grease
 Grasa delitio blanco
 Lubricant Oil
 Pulverizar aceite lubricante de
 Dashboard Polish
 Dasgboard polaco-reiniger
 Engine Degrease

Multi-purpose Foam Cleaner
 Mutil propósito del aspirador
 Auto Air Conditioner Cleaner
 Aire acondicionado
 Starting Fluid
 El fluido de arranque
 Spray Desmoldante

Tire Foma Cleaner
 Tire foma Cleaner
 Chain Lube

Rubber Coation Spray


Radiator Flush

CAR Air Freshener

Spray Paint



DEVELOPMENT HISTORY

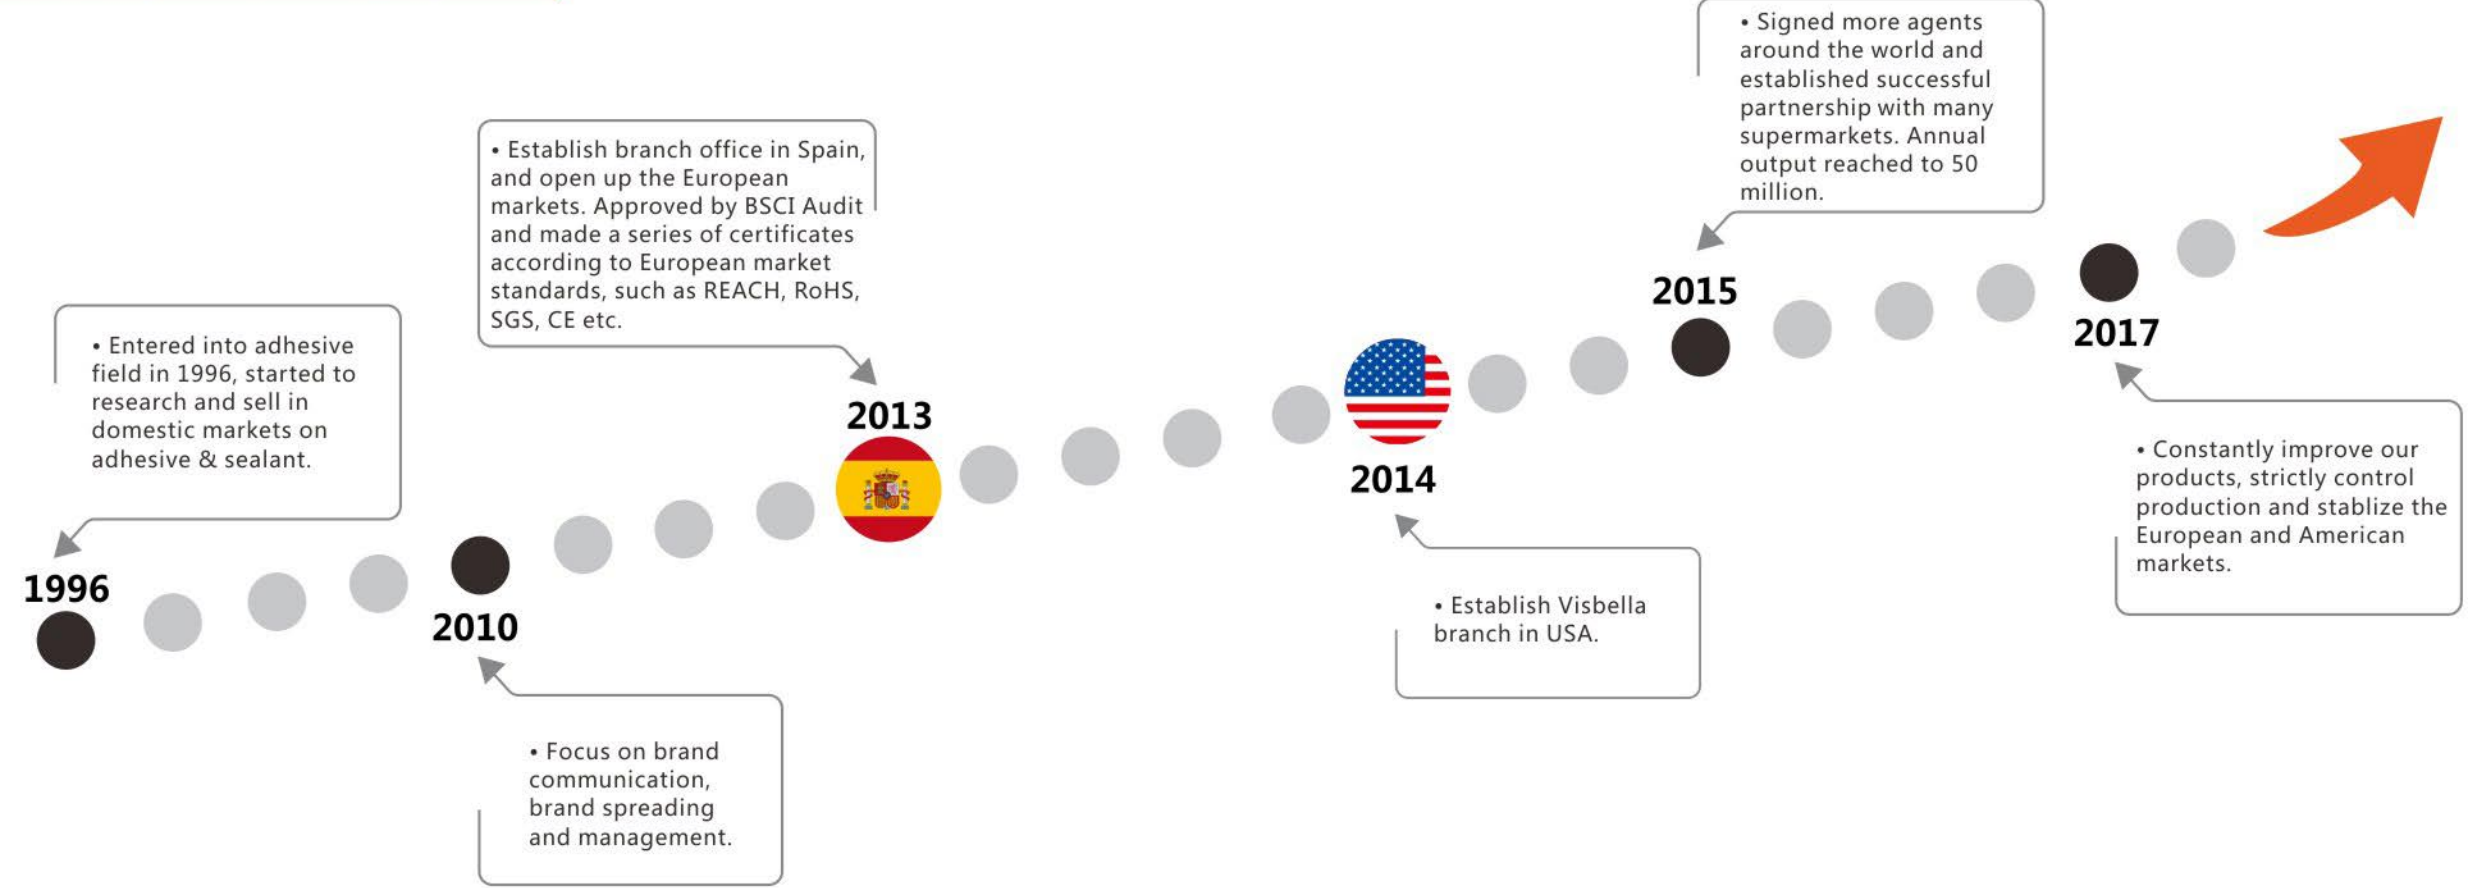


Testing Report & Certificate / Informe de prueba y certificado


BSCI, ISO 14001, SGS, RoHS, Reach, SVHC, ASTM D 4236, ISO 9001 : 2008 etc
Registered trademark in world
"VISBELLA", OEM & ODM Service Welcomed



Auto Parts Sealant / Esquema del coche

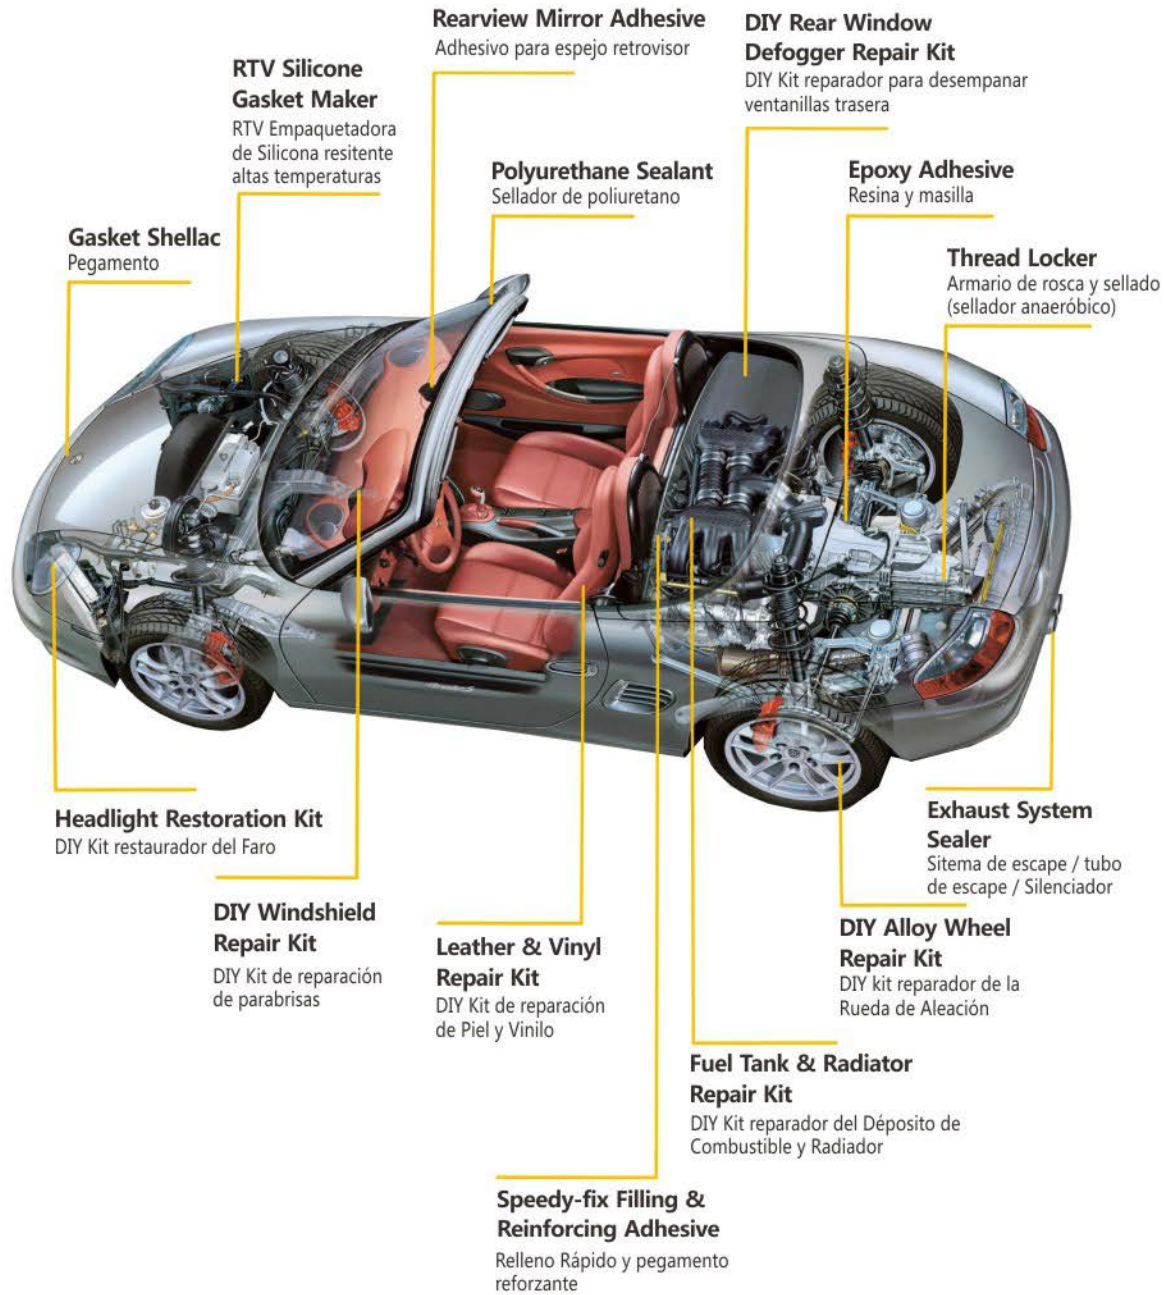

Hardware Glue / Conjunto de pegamentos en general

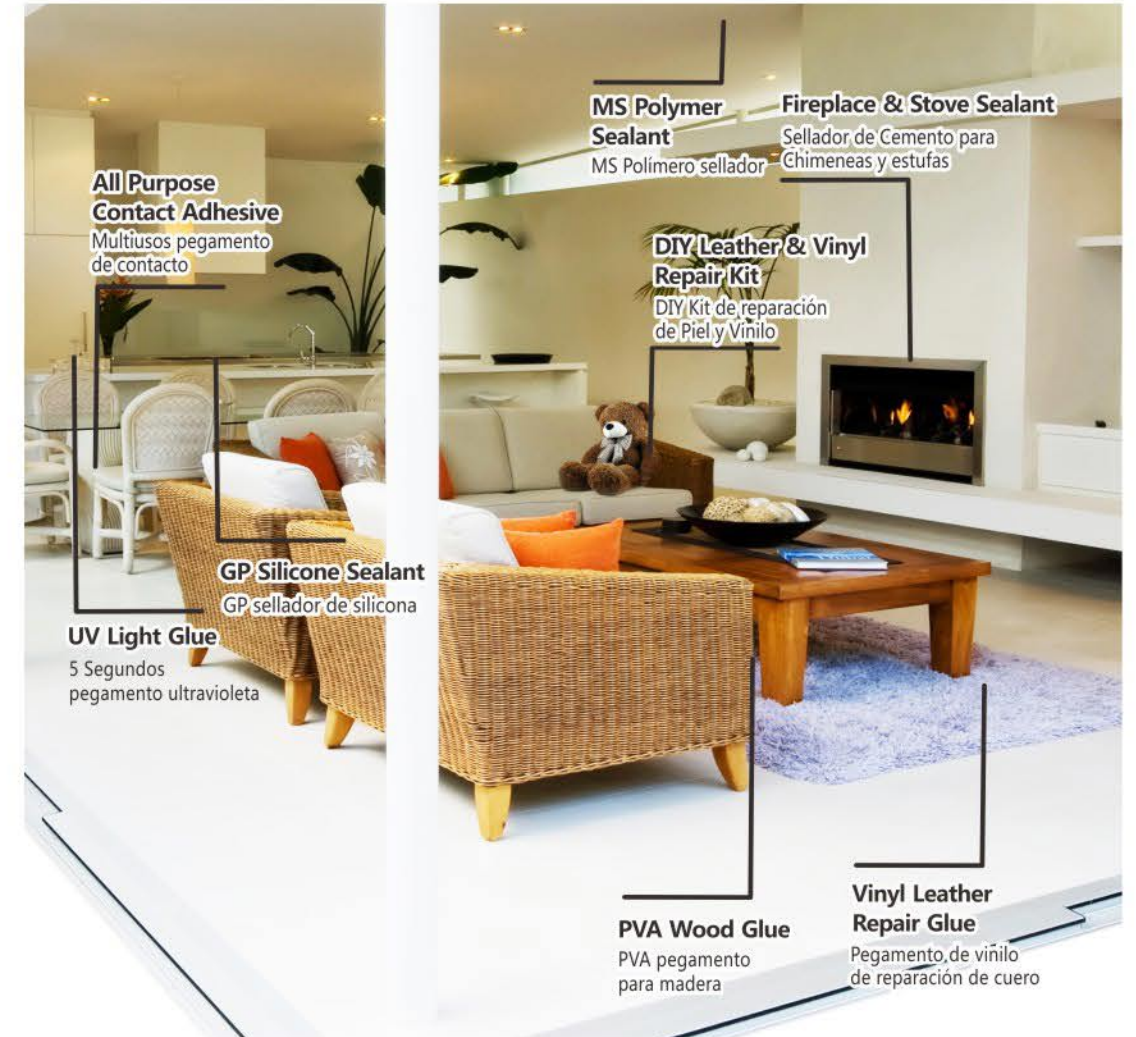

RTV SILICONE / GASKET MAKER / HIGH-TEMP RESISTANT

Empaquetadora de silicona resistente a altas temperaturas

DESCRIPTION

Visbella® High Temperature RTV Silicone is designed for Automobile production of bonding and sealing. This product is a one component RTV silicone sealant, curing completely without excitant odor release. Acid & Neutral solidified into elastic rubber strip.

DESCRIPCIÓN

Visbella® La silicona RTV para altas temperaturas está diseñada para la unión y sellado en la producción de automóviles. El sellador de Silicona RTV es un componente de este producto, repara completamente sin liberación de olores fuertes. Ácido y neutro solidificado en una tira de goma elástica.

FEATURES

Low Odor
High Temp Resistant
Safe for Sensors
Resist Oil and water
Anti-freeze
Non-corrosive



RTV 100% Silicone

CARACTERÍSTICAS

Bajo en olores
Resistente a altas temperaturas
Seguro para sensores resistente al aceite y al agua
Anti congelante
No Corrosivo

USAGE


Used for free and can be used in Gasket Maker, internal combustion engines, steam turbine, automobile, gear box, compressor, household appliances.

USO


Usado de forma libre, puede ser usado en Empaquetadoras, motores de combustión interna, turbina de vapor, automóviles, caja de cambios, compresores y electrodomésticos.

AUTO SPARE SEALANT


Depth of Cure

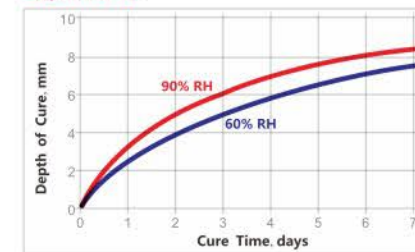


Cure Speed

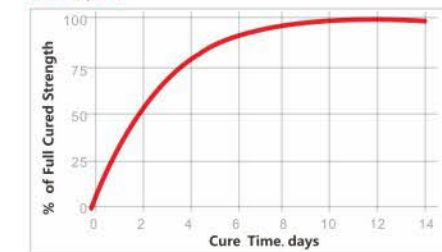


Type	Content	Color	Packing	Measure/ctn (cm)	Gross weight/ctn
Deoximation Removal of acid Dealcoholized	32gm card	Red / Grey / Black / Transparent / Blue / White	144pc/ctn	34.5X34.5X44.0	8.0 kg
	45gm card		144pc/ctn	41.0X25.0X44.0	11.5 kg
	85gm card		144pc/ctn	63.5x50.5x18.0	18.0 kg
	100gm box		100pc/ctn	50.5X42.0X21.5	15.7 kg




Engine/ Motor
Maquina/ Motor



High-Temperature Piping System
Sistema de tuberías de altas temperatura



Carburettor
Carburador



Gearbox
Caja de cambios



Part No:GN0085GY4B

- Packing: 70ml Box x 100pcs
- Measure(cm): 51.5x41.5x21.0
- Net Weight: 9.0kgs
- Gross Weight: 13.2kgs



Part No:GN0085BK4B

- Packing: 70ml Box x 100pcs
- Measure(cm): 51.5x41.5x21.0
- Net Weight: 9.0kgs
- Gross Weight: 13.2kgs



Part No:GN0085GY4A

- Packing: 85gm Blister x 144pcs
- Measure(cm): 63.5x50.5x18.0
- Net Weight: 15.1kgs
- Gross Weight: 18.0kgs



Part No:GN0085BK4A

- Packing: 85gm Blister x 144pcs
- Measure(cm): 63.5x50.5x18.0
- Net Weight: 15.1kgs
- Gross Weight: 18.0kgs



Part No:GN0085BE4A

- Packing: 85gm Blister x 144pcs
- Measure(cm): 63.5x50.5x18.0
- Net Weight: 15.1kgs
- Gross Weight: 18.0kgs



Part No:GN0085RD4A

- Packing: 85gm Blister x 144pcs
- Measure(cm): 63.5x50.5x18.0
- Net Weight: 15.1kgs
- Gross Weight: 18.0kgs



Part No:GN0085CR4A

- Packing: 85gm Blister x 144pcs
- Measure(cm): 63.5x50.5x18.0
- Net Weight: 12.5kgs
- Gross Weight: 14.5kgs



Part No:GN0085UC4A

- Packing: 85gm Blister x 144pcs
- Measure(cm): 63.5x50.5x18.0
- Net Weight: 16.0kgs
- Gross Weight: 18.0kgs

EXHAUST SYSTEM / TAILPIPE & MUFFLER SEALERCEMENT

Sistema de escape, tubo de escape y sellado y pegado del silenciador

DESCRIPTION

Visbella® Exhaust System Sealer used for leaks in mufflers, tailpipes and around joints. Saves the cost of replace muffler system. Also makes new installation more secure. Sets like a weld, remarkable adhesion to clean or rusted surfaces. Resistant to monoxide gases and high temperatures.

DESCRIPCIÓN

Visbella® Exhaust System Sealer usado para las fugas o pérdida en silenciadores, tubos de escape y alrededores. Ahorra el costo de reemplazar el sistema del silenciador. También hace la instalaciones nuevas más seguras. Montado como una soldadura, Adherencia notable para limpiar superficies óxidadas. Resistenet a los gases de monóxido y altas temeperaturas.

FEATURES

Saves Energy
Applies Easily
Stops Air Leaks
Super Tough, High Temperature Mortar

CARACTERÍSTICAS

Ahorra energía
Aplica fácilmente
Detiene fugas de aire
Mortero de alta temperatura

SPEAFICATION

Color: Grey / White / Black Paste Cream
Flammable: Non
Temperature Resistance: 2000°F (1100°C)
Curing Time: Let set 2-4 hours.
Full Cure Time: 24 hours.

ESPECIFICACIÓN


Color: Gris / Blanco / Negro Paste Crema
Inflamable: No
Resistencia a la temperatura: 2000°F continua, (1100 °C)
Tiempo de secado: 2-4 horas aproximadamente
Secado completo: 24 horas

STORAGE


Store in a cool, dry environment in unopened container. Keep from freezing.
There are no dangerous fumes when dried or wet.

ALMACENAMIENTO


Almacenar en una zona fria, seca, ambiente seco y cerrado. Mantenerlo congelado. No suelta humos peligrosos cuando se seca o moja.



Clear the Surface



Apply the Sealer



Wait for Dry



Heat for Dry



Part No:EG0200GY0P

- Color: Grey
- Packing: 200gm bowl x 48pcs
- Measure(cm): 35.5x24.2x23.0
- Net Weight: 9.6kgs
- Gross Weight: 11.5kgs



Part No:EG0040GY0P

- Color: Grey
- Packing: 40gm plastic tub x 144pcs
- Measure(cm): 36.5x31.5x21.0
- Net Weight: 5.76kgs
- Gross Weight: 8.26kgs



Part No:EG0075GY0P

- Color: Grey
- Packing: 75gm plastic tub x 144pcs
- Measure(cm): 36.5x31.5x31.0
- Net Weight: 10.8kgs
- Gross Weight: 13.5kgs



Part No:EG0150GY0P

- Color: Grey
- Packing: 150gm plastic tub x 144pcs
- Measure(cm): 36.5x31.5x40.0
- Net Weight: 21.6kgs
- Gross Weight: 24.5kgs



Part No:EG0300GY0P

- Color: Grey
- Packing: 300gm plastic tub x 24pcs
- Measure(cm): 30.0x21.0x24.3
- Net Weight: 14.0kgs
- Gross Weight: 15.0kgs

GASKET SHELLAC

Pegamento laca

DESCRIPTION

Visbella® Gasket Shellac Compound is a hard setting, slow drying liquid designed to coat, seal and repair most gaskets including felt, paper, rubber and composition type gaskets. It seals metal gaskets and threaded connections for light duty service.

DIRECTION

1. Application with brush or roller on dry, clean surfaces, free from dirt, oil, rust and dried paints or sealants. When brushed on gaskets, they should be dry.
2. Gasket Shellac compound can be applied at temperature from 5°C to 125°C.
3. The recommended thickness of the film depends on the type of surface. Generally, the wet film should be applied thin and uniform.
4. For bonding gaskets, apply on both surfaces. Allow to dry until surface are dry to the touch.

FEATURES

- Flexible when dry
- Good fuel resistance
- Improves reliability
- Increase sealing reliability
- Applies easily
- Cleans up fast

CAUTION

This product is a sealant drying slowly, its main effect on sealing the joints of all kinds of parts. But the Bonding strength is limited when you need to repair the part. If you need high adhesion strength, please coordinate with other adhesive.

STORAGE

Stored in a cool and dry environment. Long-term moisture is easy to fail.

DESCRIPCIÓN

Visbella® El compuesto del pegamento es un ajuste duro, líquido de secado lento diseñado para cubrir capas, precintar, sellar, reparar la mayoría de las empaquetadoras incluido el fieltro, papel, caucho y empaquetadoras de tipos compuestos, sellla empaquetadoras de metal, enroscado para la conexión de sevivios ligeros.

FORMA DE USO

1. Aplicación con Brocha o rodillo en seco, superficies limpias, libres de suciedad, aceite, óxido y pintura seca o selladores, cuando se aplique sobre la pieza esta debe estar seca.
2. El pegamento compuesto puede ser aplicado a temperaturas desde 5°C a 125°C
3. El grosor recomendado de la película o cantidad depende del tipo de superficie. Generalmente debe aplicarse una capa fina y uniforme.
4. para juntas de unión, aplicar en ambas superficies. Dejar secar hasta que las superficies estén secas al tacto.

CARACTERÍSTICAS

- Secado flexible
- Buena resistencia al combustible
- Mejora la fiabilidad
- Fácil de aplicar
- Limpieza rápida

PRECAUCIÓN

Este producto es un sellador de secado lento, Este principal efecto de sellado y unión para todo tipo de partes, pero la fuerza de unión de este pegamento es limitada cuando se trata de reparar una pieza. Si usted necesita un pegamento de unión con mayor fuerza. Por favor revise nuestra gama de productos.

ALMACENAMIENTO

Mantener en una atmosfera fría y seca ya que las humedades a largo plazo pueden alterar el producto.



- Part No:GG0059BNOP**
- Color: Brown liquid
 - Packing: 59ml Plastic bottle x144pcs
 - Measure(cm): 36.3x32.5x20.5cm
 - Net Weight: 9.8kgs
 - Gross Weight: 10.8kgs

WINDSCREEN / WINDSHIELD POLYURETHANE SEALANT

Parabrisas Sellador poliuretano

DESCRIPTION

Visbella® Windshield Sealant/Polyurethane Sealant is a single part polyurethane based, high modulus sealant. It can cure on exposure to atmospheric moisture to form elastomeric mastic. Visbella® Windshield Sealant has excellent adhesion on glass and metal. It is most suitable for bonding and sealing windshield in the automotive industry. It functions good on automotive windscreen, windows and scuttles.

FEATURES

- Non-corrosion to Substrates
- High Modulus & Tensile Strength
- Excellent Adhesion On Glass & Metal Surface
- Outstanding Durability
- Permanently Flexible

USAGE

Windshield Sealant is used for sealing for automotive windows windshield assembly, body assembly and other components. It widely suitable for sealing in automotive, caravan, ship building and railway industry. It is also suitable for sealing, seam sealing, simple bonding as well as for vibration reduction and sound deadening measures in crash body repair and car body construction.



- Part No:PG0310BK0A**
- Color: Black
 - Packing: 310ml x 24pcs
 - Measure(cm): 33.0X22.0X26.0
 - N.W: 10.5kgs
 - G.W: 11.5kgs

DESCRIPCIÓN

Visbella® Windshield Sealant/ Polyurethane Sealant esta basada en una sola pieza de Poliuretano, alto sellador de modulus. Esto puede actuar en atmósferas expuestas a la humedad para formar unas masilla elastomérica. Visabella® windshield Sealant se adhiere excelente en metal y cristal. Es el mejor adecuado para la unión y sellado de parabrisas en la industria del automóvil. Esto funciona bien en automoción, parabrisas, ventanas y escotillas.

CARACTERÍSTICAS

- No corrosivo a los substratos
- Alto módulo y resistencia ala tracción
- Se adhiere excelente al metal y superficies de cristal
- Excelente durabilidad
- Permanentemente flexible

USO

El selladora para parabrisas esta usado como sellador para montajes de la ventana del parabrisas de automoción, montajes del cuerpo y otros componentes. Es ampliamente adecuado para sellados de automóviles, caravanas, barcos, edificios y la industria de los trenes. Es también utilizado para el sellado, costura o simplemente uniones tales como bien la reducción de vibración y medidas de amortiguadora del sonido en la reparación del cuerpo de choque y construcción.



- Part No:PG0310BK0A**
- Color: Black
 - Packing: 310ml x 24pcs
 - Measure(cm): 33.0X22.0X26.0
 - N.W: 10.5kgs
 - G.W: 11.5kgs

VALVE GRINDING COMPOUND

Compuesto de molienda de Válvulas

DESCRIPTION

Visbella® Valve Grinding Compound aids valve grinding and seating operations to remove burns, surface defects, carbon, gum and corrosion. It can be used for lapping and grinding chromium. Mixes with water to form an easy-to-use paste.

DESCRIPCIÓN

Visbella® Valve Grinding Compound ayuda a la molienda de Válvulas y asientos quitando las quemaduras, superficies dañadas, carbono, gomas y corrosión. Se puede utilizar para doblar y triturar cromo. Mezclado con agua se transforma en una pasta fácil de usar.

FEATURES

Use For hand or machine grinding removes surface defects, burrs, corrosion and carbon build-up Hardened steel seats or cast blocks Mixes with water to form an easy-to-use paste.

CARACTERÍSTICAS

Uso a mano o máquina trituradora
Remueve superficies dañadas, quemaduras, corrosión, acumulación de carbono
Asiento de acero endurecido o bloque de fundición
Mezclado con agua se forma una pasta fácil de manejar



- Part No:VG0100BE0P**
- Packing: 48pcs/carton
 - Measure(cm): 31.5X21.5X18.5
 - Net Weight: 5.76kgs
 - Gross Weight: 6.76kgs

CAUTION

Avoid contact with eyes and skin. Do not breathe vapors. Do not swallow. If swallowed, induce vomiting and call a physician. For eye contact, flush with water for 15 minutes, call a physician. For skin contact, wash thoroughly with soap and water. If overcome by fumes, get fresh air. **KEEP OUT OF THE REACH OF CHILDREN.**

PRECAUCIONES

Evitar el contacto con los ojos y la piel. No respirar ni tragar el humo o vapor. Si es tragado inducir al vómito y llamar a un médico. Para el contacto con los ojos enjuagar por 15 minutos con agua, llamar a un médico. Para el contacto con la piel lavar a fondo con agua y jabón. Si es alcanzado por los vapores salir a coger aire fresco. **Mantener fuera del alcance de los niños.**



- Part No:VG0085RD0P**
- Packing: 48pcs/carton
 - Measure(cm): 24.5X24.5X19.0
 - Net Weight: 6.0kgs
 - Gross Weight: 6.4kgs



- Part No:VG0125RD0P**
- Packing: 48pcs/carton
 - Measure(cm): 24.9X24.9X21.8
 - Net Weight: 8.0kgs
 - Gross Weight: 8.5kgs



- Part No:VG0200RD0P**
- Packing: 48pcs/carton
 - Measure(cm): 23.0X28.5X28.5
 - Net Weight: 11.7kgs
 - Gross Weight: 12.3kgs



- Part No:VG0085BE0P**
- Packing: 48pcs/carton
 - Measure(cm): 24.5X24.5X19.0
 - Net Weight: 6.0kgs
 - Gross Weight: 6.4kgs



- Part No:VG0125BE0P**
- Packing: 48pcs/carton
 - Measure(cm): 24.9X24.9X21.8
 - Net Weight: 8.0kgs
 - Gross Weight: 8.5kgs



- Part No:VG0200BE0P**
- Packing: 48pcs/carton
 - Measure(cm): 23.0X28.5X28.5
 - Net Weight: 11.7kgs
 - Gross Weight: 12.3kgs

RADIATOR STOP LEAK

DESCRIPTION

Visbella® Stop Leak is a non-toxic compound for stopping radiator and cooling system leaks. It can quickly mix and flow into all areas of the cooling system to fix and seal leaks and permanent repairs for all Car, Truck, Van, Bus and Tractor Radiators. Powder is safe with all types of antifreeze and will not clog or harm your cooling system, but act as a rust inhibitor and lubricant to internal cooling system parts.

FEATURES

- Seal leaks Safely, Quickly & Easily
- Applied on Radiator, Heater Core & Freeze Plugs
- Lubricants Water Pumps Seal and Inhibits Rust & Corrosion
- Compatible with all types of Antifreeze
- Harmless to all Plastic, Metals, Aluminum, Hoses & Connections.
- Will not Clog, Obstruct or Harm the Cooling System

CAUTION

SKIN & EYE IRRITANT. Read instructions and cautions on back panel.

DIRECTIONS

DANGER: Opening cooling system while engine is hot or running may cause severe burns.

Cooling systems that are dirty or partially clogged should be flushed before usage.

1. Make sure engine is cool so radiator cap can safely be removed.
2. Pour entire tube powder into radiator. One tube treats systems up to 3 gallons.
3. Fill radiator and overflow tank to proper level and reinstall cap.
4. Running motor fast enough to circulate the water. Continue to run motor for 15 minutes until water is hot and leak stops.
5. If leaks continues, a second application may be required. For extra large leaks where water runs out before the powder has time to work, catch the solution and pour back into radiator, repeating the operation until a complete seal is effected.



Part No:SG0020BN3P

- Packing: 20ml blister card x 144pcs
- Measure(cm): 40.0x35.0x40.5
- Net Weight: 6.4kgs
- Gross Weight: 7.4kgs



Part No:SG0020BN1B

- Packing: 20ml tube x 288pcs
- Measure(cm): 35.5x33.0x23.5
- Net Weight: 7.8kgs
- Gross Weight: 8.8kgs

REARVIEW MIRROR ADHESIVE

Pegamento para el espejo retrovisor

DESCRIPTION

Visbella® RearView Mirror Adhesive is two parts component glue, but notice no mixing of the two parts. It is extra strong and fast acting. It outperforms epoxy and super glue type products. Holds up well in high temperature and humid environment. Two-part structural acrylic system designed to mount rear view mirrors.

It works mainly on where rearview mirror broken and brackets to windshield in seconds. Also can be used to bond metal to metal, glass to glass, glass to metal, ceramics, jewelry and any smooth plane surface you can think of.

DESCRIPCIÓN

Visbella® Rearview Mirror Adhesive esta compuesto por dos tipos de pegamentos, es importante no mezclar estas dos partes. Es un adhesivo extra fuerte y actua de forma rápida. Supera a todo tipo de material y pegamentos. Aguanta bien las temperaturas altas y la humedad ambiental. Sistema estructural acrílico de dos piezas ha sido diseñado para montar el espejo retrovisor.

Esto trabaja principalmente donde espejo retrovisor roto o dañado y soporte al parabrisas en segundos. También puede ser utilizado para unir metal con metal, cristal con cristal, o cristal con metal, ceramica, joyas, para superficies suaves puedes tambien usarlo.

FEATURES

Simple and Easy to Use
Excellent Bonding for Glass & Metal
Cure Within Minutes
No Clamping Primer Required

CARACTERÍSTICAS

Simple y fácil de usar
Excelente para unir cristal y metal
Actúa en minutos
No requiere pinza de sujeción

DIRECTION

1. Mark the original bracket location on windshield.
2. Clean glass and mirror bracket.
3. Apply primer to both bonding surface. Allow medium dry.
4. Apply one drop of adhesive to bracket only. DO NOT SPREAD.
5. Position bracket on glass and hold firmly for 1-2 minutes until adhesive cures. Wait an additional 10 minutes before mounting mirror to bracket.

INSTRUCCIONES DE USO

1. Marque el soporte original en el parabrisas
2. Limpie el cristal y el soporte del espejo
3. Aplíquelo primero dentro del parabrisas para marcar la zona. Permitir que seque un poco.
4. Agregar una gota del adhesivo solo en el soporte. Sin extenderlo
5. Colocar el soporte en el cristal y sujetarlo firmemente durante 1-2 minutos hasta que el adhesivo actúe por completo. Esperar 10 minutos más antes de volver a montar soporte del espejo.



DIY SERIES



Part No:RQ0001YW3P

- Color: Blue+Light Yellow
- Packing: (0.4ml+0.6ml) x 200pcs
- Measure(cm): 40.7X32.0X36.5
- N.W: 4.0kgs
- G.W: 5.0kgs

SPEEDY-FIX FILLING & REINFORCING ADHESIVE

Relleno rapido y pegamento reforzante

DESCRIPTION

Visbella® Speedy-Fix® has received good reputation for outstanding quality and superior performance. For more serious repairs use the two-part system (adhesive and powder) with unique reinforcing and filling capabilities with which cracks, holes and gaps can be repaired to regain their original shape. These repairs can be grinded, filed, sanded and painted. Repair these items and many more so that it is hardly visible. All this within a short period of time.

DESCRIPCIÓN

Visbella® Speed-Fix® ha obtenido una buena reputación por su excelente calidad y un rendimiento superior. Para reparaciones más serias utiliza two- parts system (pegamento y polvo) con un único refuerzo y increíble capacidad de relleno con lo cual las grietas, agujeros y brechas pueden ser resparadas y recuperar su forma original. Estas reparaciones pueden ser picadas, limadas, lijadas y pintadas. Repara el producto y mucho más ya que esté es apenas visible: y todo esto en un corto periodo de tiempo.

FEATURES

Rapid Solidification
Strong Cohesive Force
Widely Use Range
Easy Operation



CARACTERÍSTICAS

Rapida Solidificación
Increíble fuerza cohesiva
Rango ampliamente utilizado
Facil manejo

USAGE

Speedy-Fix Filling and Reinforcing adhesive is designed to bond rubber, copper, steel, aluminum and most plastics. Black Powder to repair Bumper Grilles Radiators Motorcycle Fairings Electrical Switches Door Handles Distributor caps and so on. Grey Powder and Clear Powder to repair Cracks on engine casings heat resistant.

USO

Speedy Fix and Reinforcing adhesive esta diseñado para unir el caucho, cobre, acero, aluminio y la mayoría de plásticos. Black powder es utilizado para reparar paracoches, rejillas, radiadores, motocicletas y interruptores eléctricos, manijas de puertas, tapas de distribuidor y mucho más Grey powder y clear powder para reparar la grietas en la cubierta del motor resistente al calor.

STORAGE

Store in a cool area out of direct sunlight.
Refrigeration to 5°C gives optimum storage stability.

ALMACENAMIENTO

Mantener el producto en una area fria y fuera de los rayos del sol.
Refrigeración a 5°C da la estabilidad de almacenamiento óptica.

Type	Content	Appearance	Packing	Measure(cm)/ctn
GP2	10ml+10ml clamshell	Grey / Black / White	60pc/ctn	47.5x33.0x45.0
	10ml+10ml box	Clear Powder	72pc/ctn	41.6x25.6x23.3
GP4	20ml+20ml box	Grey +Black Powder	72pc/ctn	47.5x37.5x26.5
GP9	30ml+60ml box	Grey +Black Powder	24pc/ctn	26.6x33.0x25.0



Part No:SQ0090BG1B

- Color: Grey + Black
- Packing: (30ml+60ml) x 32pcs
- Measure(cm): 53.9X46.7X15.5
- Net Weight: 8.1kgs
- Gross Weight: 9.4kgs



Part No:SQ0040BG1B

- Color: Grey / Black
- Packing: (20ml+20ml) x 72pcs
- Measure(cm): 47.5X37.5X24.5
- Net Weight: 10.0kgs
- Gross Weight: 11.0kgs





Part No:SQ0020BK1B

- Color: Black
- Packing: (10ml+10ml) x 72pcs
- Measure(cm): 41.6X38.0X23.3
- Net Weight: 6.5kgs
- Gross Weight: 7.5kgs



Part No:SQ0020GY1B

- Color: Grey
- Packing: (10ml+10ml) x 72pcs
- Measure(cm): 41.6X38.0X23.3
- Net Weight: 6.5kgs
- Gross Weight: 7.5kgs



Part No:SQ0020BK5P

- Color:Black
- Packing: (10ml+10ml) x 60pcs
- Measure(cm): 47.5x33.0x45.0
- Net Weight: 5.9kgs
- Gross Weight: 6.9kgs



Part No:SQ0020GY5P

- Color: Grey
- Packing: (10ml+10ml) x 60pcs
- Measure(cm): 47.5x33.0x45.0
- Net Weight: 5.9kgs
- Gross Weight: 6.9kgs



Part No:SQ0020CR1B

- Color: Clear
- Packing: (10ml+10ml) x 72pcs
- Measure(cm): 41.6X38.0X23.3
- Net Weight: 6.5kgs
- Gross Weight: 7.5kgs



Part No:SQ0020WE1B

- Color: White
- Packing: (10ml+10ml) x 72pcs
- Measure(cm): 41.6X38.0X23.3
- Net Weight: 6.5kgs
- Gross Weight: 7.5kgs



Part No:SQ0020CR5P

- Color: Clear
- Packing: (10ml+10ml) x 60pcs
- Measure(cm): 47.5x33.0x45.0
- Net Weight: 5.9kgs
- Gross Weight: 6.9kgs



Part No:SQ0020WESP

- Color: White
- Packing: (10ml+10ml) x 60pcs
- Measure(cm): 47.5x33.0x45.0
- Net Weight: 5.9kgs
- Gross Weight: 6.9kgs



5 SECONDS UV LIGHT GLUE (SPEEDY FIX UV GLUE)

5 segundos pegamento ultravioleta

DESCRIPTION

Visbella® 5 Seconds UV Light Glue is a super powered liquid plastic welding compound that you can quickly and easily make permanent seals and repairs. The curing glue works on metal, wood, ceramic, glass, plastics, jewelry and more. It's fast and strong, creates an Everlasting Bond in Just 5 Seconds with the UV light provided.

FEATURES

- Cures in 5 Seconds
- Makes a Strong, Lasting Bond
- Can be shaped, sanded, drilled, polished, and painted

Vapor pressure: < 6 mm Hg (27 °C (80.6 °F))

Boiling point/range: > 149 °C (> 300.2 °F)

Density: 1.04(g/cm³)

Flash point: 65 °C (149°F)

Viscosity(mpa.s): >950

Hardness(A): 65-75

DESCRIPCIÓN

Visbella® 5 sec UV light Glue es un compuesto de soldadura de plástico líquido super potente para que puedas hacer una reparación y sellado permanente rápido y fácil. Este pegamento puede ser utilizado en metal, madera, cerámica, cristal, plástico, joyas y mucho más. Es rápido y fuerte, creando un vínculo eterno en tan solo 5 segundos con luz ultravioleta producida.

CARACTERÍSTICAS

- Actúa en 5 segundos
- Hace una unión fuerte y permanente
- Puede ser modelado, lijado, perforado, pulido y pintado

Presión de vapor: < 6 mm Hg (27 °C (80.6 °F))

Punto de ebullición/alcance : > 149 °C (> 300.2 °F)

Densidad: 1.04(g/cm³)

Punto de inflamabilidad: 65 °C (149°F)

Viscosidad(mpa.s): >950

Dureza(A): 65-75

WARNING

- 1.Be Harmful If Swallowed. Eye Irritant.
 - 2.Exposure May Cause Allergic Skin And Respiratory Reactions.
 - 3.Avoid Contact With Eyes And Skin.
 - Do Not Breath Vapors.
 - Do Not Take Internally.
 - 4.Do Not Mix Old And New Batteries
 - Do Not Mix Alkaline And Standard(Carbon Zinc) Batteries, Or Rechargeable (Nickel Cadmium) Batteries.
 - Batteries Are Not Designed To Be Replaced.
 - Do Not Tamper With Batteries. Insert Batteries According To Polarity.
 - Do Not Reverse Or Mix The Direction Of The Batteries.
- Dispose Of Batteries Properly.

PRECAUCIONES

- 1.Es nocivo si es tragado o ingerido. Irrita los ojos.
- 2.Su exposición quizás puede causar alergia en la piel y reacciones respiratorias.
- 3.Evitar el contacto con los ojos y la piel .
 - No respirar el vapor .
 - No los tomes internamente .
- 4.No mezclar las baterías o pilas viejas con las nuevas .
 - NO mezclar las alcalinas con las estandar (carbon zinc) pilas o pilas recargables (Nickel Cadmieun).
 - Las pilas o baterías no estan hechas para ser reemplazadas.
 - NO alterar o mezclar las pilas, insertarlas deacuerdo a la polaridad.
 - NO cambiar o mezclar la direccioón de las pilas. Colocar las pilas correctamente.



1. Mark with Fluorescent pen

2. Apply glue

3. Cure

4. Shape



Part No:UQ0004CR4A

- Packing: 4gm blisterx 120pcs
- Measure(cm): 47.5X33.0X45.0
- N.W: 6.4kgs
- G.W: 7.4kgs



Part No:UQ0004CR2P

- Packing: 4gm blister x 192pcs
- Measure(cm): 47.5X33.0X45.0
- N.W: 10.5kgs
- G.W: 11.5kgs



Part No:UQ0008CR2P

- Packing: 8gm blister x 120pcs
- Measure(cm): 47.5X33.0X45.0
- N.W: 7.80kgs
- G.W: 8.80kgs



Part No:UF0008CR2P

- Packing: 8gm blister x 120pcs
- Measure(cm): 47.5X33.0X45.0
- N.W: 7.54kgs
- G.W: 8.54kgs

DIY AUTO WINDSCREEN WINDSHIELD REPAIR KIT

Bricolaje para el parabrisas del coche y kit de reparación

DESCRIPTION

Visbella® DIY Windshield Repair Kit is easy apply to repair the damaged windshield in just 30minutes. This kit will minimize the damage and stop the spread of chips and cracks in the windshield. It removes air from the break, fills with durable resin and makes it even stronger than before. For best results, repairs should be made as soon as possible after the damage occurs and before the break is contaminated by dirt or water.

DESCRIPCIÓN

Visbella® DIY Windshield Repair kit es fácil de aplicar y repara los daños en tan solo 30 minutos. Este kit reducirá el daño impidiendo la propagación de virutas y grietas en el parabrisas. Este producto quita el aire de la rotura, relleno con una resina durable que lo hace inclusive mas fuerte que antes. Para obtener mejores resultados, la reparación debería ser hecha inmediatamente después del rotura o daño antes de que la grieta o rotura se llene de agua y suciedad.



Half Moon
Media luna



Combination
Combinación



Bulls Eye
En forma de ojo bola




Star
En forma de estrella

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8 to 28 °C (46 to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

ALMACENAMIENTO

Es ideal mantener el producto en una zona fria, lugar seco y cerrado a una temperatura entre 8°C a 28°C, al menos que se indique lo contrario. Lo optimal seria mantenerlo a la mitad de la temperatura mencionada. Para evitar contaminaciones o accidentes no reutilizar el envase del producto con otros.

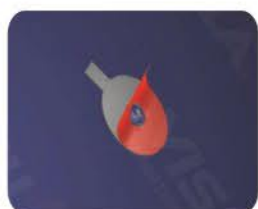

MOUNT SEAL OVER BREAK



STICK PEDESTAL OVER THE SEAL



DROP RESIN INSIDE PEDESTAL



INSERT AND PULL SYRINGE



Part No:WG0003CR5P

- Color: Clear
- Packing: 72pcs/carton
- Measure(cm): 39.5X33.0X45.0
- N.W: 5.4kgs
- G.W: 6.4kgs



Part No:WQ0003CR1B

- Color: Clear
- Packing: 48pcs/carton
- Measure(cm): 36.0X36.0X35.0
- N.W: 3.8kgs
- G.W: 4.8kgs

DIY REAR WINDOW DEFOGGER REPAIR KIT

DIY Kit reparador para desempañar ventanillas traseras

DESCRIPTION

Visbella® DIY Rear Window Defogger Repair is designed to repair scratched or broken rear window defogger grid lines. Surfaces to be adhered must be smooth and flat. Read all directions before beginning repair. Repairs can be made ideally at temperatures from 50°F to 75°F (10°C to 24°C). Complete kit contains everything required for making professional-quality repairs in just minutes. State-of-the-art components and easy-to-follow instructions with photographs. Provides a low-cost, high-quality repair for damaged rear window defogger grids and tabs.

FEATURES

Easy-to-use kit simplifies repair;
Inexpensive - saves the cost of having a shop perform the repair;
Glue is specially formulated to conduct electricity;
Instructions included;
Anyone can fix a detached rear window defogger tab;

Fix your rear auto window defogger quickly and easily with an inexpensive repair kit. No special skills needed.

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8 to 28 °C (46 to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

DESCRIPCIÓN

Visbella® DIY Repardor para reparar arañazos o roturas en las ventanillas traseras. La superficie que sera adherida debe estar suave y plana. Leer todas las instrucciones antes de empezar con la reparación. Temperaturas de 50°F a 70°F seran ideales para la reaparación. El kit completo contiene todo lo que se requiere para hacer un trabajo de calidad y con un toque profesional en solo minutos. El estado de arte de los componentes y el fácil manejo de las instrucciones con fotografías. Proporciona un bajo coste para la reparación del daño obtenido una alta calidad de evntanillas traseras, rejillas y grifos.

CARACTERÍSTICAS

kit de fácil uso, simplifica la reparación;
Económico – Ahorrar el coste de un taller de reparaciones;
El pegamento esta especialmente formulado para lo conductos eléctricos;
Instrucciones incluidas;
Cualquiera puede resparar o restaurar su ventanilla trasera;

Arreglo rápido y fácil con un Kit económico. Sin necesidad de especiales conocimientos

ALMACENAMIENTO

El producto sería ideal mantenerlo en una zona fría y seca cerrada a temperaturas entre 8 a 20°C al menos que en la etiqueta diga lo contrario. La temperatura óptima para almacenarlo sería a la mitad de la temperatura indicada. Para evitar la contaminación de productos no usados, no reutilizar el envase original



MASK THE TARGETED AREA WITH THE PROVIDED TAPE



APPLY THE SILVER REPAIR COMPOUND IN BETWEEN THE TAPE



REMOVE THE MASKING TAPE IMMEDIATELY



WIPE OFF ANY EXTRA SILVER REPAIR RESIDUE



Part No:RG0002BN5P

- Packing: 72pcs/carton
- Measure(cm): 39.5X33.0X45.0
- N.W: 4.9kgs
- G.W: 5.9kgs



Part No:RG0002BN1B

- Packing: 48pcs/carton
- Measure(cm): 36.0X36.0X35.0
- N.W: 3.0kgs
- G.W: 4.0kgs

DIY LEATHER & VINYL REPAIR KIT

DIY Kit de reparación de Piel y Vinilo

DESCRIPTION

Visbella® DIY Leather and Vinyl Repair Kit is very handy and easy to help you to repair any cracks, cuts, burns and tears on leather and vinyl material surface. A variety of colors and grain papers designed to match surrounding materials makes repairs blend in with existing vinyl or leather. A color matching guide helps determine the correct color to match the damaged surface. With the complete directions that are included in the kit, you can achieve a quality result without the cost or expertise of a professional.

FEATURES

Make Permanent, Invisible repairs
Easy to follow step-by-step instructions
Matches all popular colors & grains
Does not migrate during cure
Saves the cost

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8 to 28 °C (46 to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

DESCRIPCIÓN

Visbella® DIY Leather and Vinyl Repair Kit es muy práctico y fácil para reparar cualquier grieta, corte, quemaduras y rasguños en la superficie de material tales como la piel y el vinilo. Una gran variedad de colores y papel de grano han sido diseñados para que hagan juego y se mezcle con el material que queremos arreglar. Una guía completa de colores ayudara a determinar el color perfecto que encaje con el color de la superficie que queremos reapar. Además de una guía de instrucciones incluida en el kit, Usted conseguirá una calidad con un excelente resultado sin necesidad de coste o servicios de un profesional.

CARACTERÍSTICAS

Hace permanentes y arreglos que no lo notará
Fácil de aplicar siguiendo las instrucciones paso a paso
Encaja con con todos los colores populares y granos
No utilizar durante el proceso de reparación
Ahorra el coste

ALMACENAMIENTO

El producto sería ideal mantenerlo en una zona fria y seca cerrada a temperaturas entre 8 a 20°C al menos que en la etiqueta diga lo contrario. La temperatura óptima para almacenarlo sería a la mitad de la temperatura indicada. Para evitar la contaminación de productos no usados, no reutilizar el envase original.



Part No:LG0036WE5P

- Packing: 72pcs/carton
- Measure(cm): 39.5X33.0X45.0
- N.W: 8.5kgs
- G.W: 9.5kgs

Before



After



Before



After



- ✓ Car upholstery
- ✓ Dashboards
- ✓ Motorcycle seats
- ✓ Vinyl tops
- ✓ RV upholstery
- ✓ briefcases
- ✓ Furniture
- ✓ Footwear

- ✓ Tapicería de coche
- ✓ Cuadro de mandos, tableros
- ✓ Asientos de motos
- ✓ Prendas en vinilo
- ✓ Tapicería de RV
- ✓ Maletines, bolsos, portafolios
- ✓ Muebles
- ✓ Calzado



Part No:LG0036WE1B

- Packing: 48pcs/carton
- Measure(cm): 36.0X36.0X35.0
- N.W: 4.1kgs
- G.W: 5.1kgs

DIY HEADLIGHT RESTORATION KIT

Kit restaurador de Faros

DESCRIPTION

Visbella® Plastic lens can yellow with age, reducing headlight brightness, and new lenses can be expensive. The Headlight Restoration Kit lets you shine and restore plastic lens, including headlights, tail lights, fog and directional lights. By restoring clarity to the lens, the performance of the headlight is improved and the appearance of the vehicle is enhanced. Now you can produce professional results with the Headlight Restoration Kit. Kit includes all items necessary to perform the task.

DESCRIPCIÓN


Visbella® Los lentes de plástico pueden amarillar con el tiempo reduciendo el brillo de los faros, y unos nuevos pueden resultar caros. El Kit de restauración de faros permite restaurar y dar brillos a sus lentes de plástico incluidos los faros, luces traseras, de niebla, y de dirección. Para la Restauración este producto ha sido mejorado y la apariencia del vehículo es mucho mejor. Ahora Usted puede obtener resultados profesionales con este Kit de restauración, incluye todo lo necesario para un excelente trabajo.



SAND



POLISH



PROTECT



Part No:HG0086CR5P

- Packing:72pcs/carton
- Measure(cm):39.5X33.0X45.0
- N.W: 8.8kgs
- G.W: 9.8kgs

FEATURES

- Helps restore clear plastic by removing haze and discoloration;
 - Provides a deep clean to yellowed, hazed headlights with the use of a specially designed polish and sealant;
 - Improves visibility and safety;
 - One kit is intended to restore two headlight lenses;
- This inexpensive kit saves hundreds of dollars and restores crucial night time visibility by restoring your own lenses;
- Easy 3-step process requires as little as an hour to remove scratches and restore cloudy, dull lenses.

CARACTERÍSTICAS

- Ayuda a restaurar el plástico eliminando la turbidez y decoloración;
- Elimina en profundidad el estado amarillento y turbio de los faros a un diseño especial de sellado y brillo;
- Mejora la visibilidad y seguridad;
- Un Kit esta destinado para la restauración de dos faros;
- Este Kit económico te ahorra cientos de dólares y restauración crucial de la visibilidad nocturna mediante su propio lente.
- Con tan solo 3 pasos y en menos de una hora Usted puede quitar sus arañazos y restaurar sus opacos y nubosos lentes.

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8-28°C (46-82°F).

ALMACENAMIENTO

Seria ideal mantener el producto en un zona fria, seca y cerrada a temperaturas enter 8°- 28°C.



Part No:HG0086AC1B

- Packing:36pcs/carton
- Measure(cm):40.5X28.5X41.0
- N.W: 9.7kgs
- G.W: 10.7kgs



Part No:HG0086MA1B

- Packing:36pcs/carton
- Measure(cm):40.5X28.5X41.0
- N.W: 8.7kgs
- G.W: 9.7kgs

DIY DENT & DING REPAIR KIT

DESCRIPTION

Visbella® DIY Dent & Ding repair kit useful to remove small dings and dents from car doors,coffer,roof,...by yourself and without damaging the car paint.

It can be used after small collisions or hailing,all over the car body surface, except borders and angles.

SAFETY INFORMATION

- 1.Wear safety goggles and heavy-duty work gloves during use.
- 2.Contains glue: keep away from children reach. This product is not a toy. Do not allow children to play with or near it.
- 3.Use as intended in these instructions only.
- 4.Check before every use, do not use if parts are loose.
- 5.Keep product labels and nameplates, they report important safety and technical info on the product.

INSTRUCTIONS FOR USE

Read the entire important safety info here-above before set up or use of this product!

- 1.Insert Glue stick into Glue gun . Plug in the Glue gun and let it warm up for 10-15 minutes before use.
- 2.Using a Clean cloth, clean dent area with the Release agent . Then apply heated glue from Glue gun to the centre of the glue.Select one of the Puller tab according to the dent to be treated, and stick it to the glue. Attention: Keep the Puller tab hold firmly for 10 seconds. Do not push excessively the Puller tab against the Dent!
- 3.Place Puller bridge stand over the Puller tab,setting Adjusters to desired length. Screw the Knob nut slowly,and continue to rotate until dent is raised. Stop when dent returns to normal surface level of the car body.
- 4.Unthread Knob nut and remove Puller bridge stand and Puller tab from treated surface.
Use the Release agent in endowment to remove the dried glue from the surface. Then, use the Plastic scraper to peel off softened glue patch.
- 5.If a too high glue spot has been created, use a Rubber hammer and lightly tap the Leveling pen against raised spot to remove.

If the dent surface is big, can make it again.



Part No:DG0020CR1B

- Packing: 24pc/carton
- Measure(cm): 46.5X42.5X51.6
- N.W: 16.6kgs
- G.W: 17.6kgs

TIRE REPAIR KIT

DESCRIPTION

Visbella® Tire Repair kit is designed to repair flat tires with punctures, which is ideal for repairing tubeless tire of cars, motorcycles, ATVs, lawnmowers, tractors, bikes, jeeps, trucks etc.

FEATURE

- Sturdy T-handle repair tool
- Easy operation and quick repair
- No need to remove the tire from the rim

NOTE


Not applicable for any sidewall puncture, not intended for repairing major tire damage.

This repair kit should be used as temporary fix, make sure repair your tire permanently when available.



Part No:TQ0012RD3P

- Packing: 72pc/carton
- Measure(cm): 41.5X49.5X53.0
- Net Weight: 14.0kgs
- Gross Weight: 15.5kgs

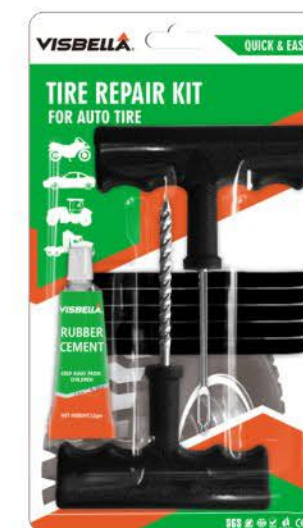

Part No:TQ0012BK5P

- Packing: 120pcs/carton
- Measure(cm): 41.5X49.5X53.0
- Net Weight: 15.5kgs
- Gross Weight: 16.5kgs

DIY FUEL TANK & RADIATOR REPAIR KIT

Reparador del depósito de combustible y radiador

DESCRIPTION

Visbella® DIY Fuel Tank & Radiator Repair Kit is permanently repairs gasoline and diesel fuel tank leaks. The kit contains complete accessories for making professional-quality repairs in just minutes. Includes state-of-the-art components and to make quick permanent repairs to leaks in all types of metal fuel tanks. Repair will be completed after the resin cures in 30 minutes. Tank could be refilled after 30 minutes or when the repair is tack free. The repair resin is designed to harden within 3-5minutes and cures in 10 minutes. Repairs can be made ideally at temperatures from 50°F to 75°F (10°C to 24°C). Repairs made at lower temperatures will take longer to cure.

DESCRIPCIÓN

Visbella® DIY Fuel Tank & Radiator Repair Kit repara de forma permanente las fugas del tanque de gasolina o diesel. El kit contiene un completo de accesorios para obtener una calidad profesional en solo minutos. Incluye componentes del estado de la artes y hace una reparación rápida y permanente para las fugas de todo tipo de depósitos de combustible de metal. La reparación estará completa cuando la resina actue en 30 minutos pasado ese tiempo el tanque podrá ser llenado o cuando la reparación este libre de tachuelas. La resina de resparación esta diseñada para endurecerse con 3-5 minutos y actuar en 10 minutos.

La reapraqción se puede hacer a temperaturas ideal de 50°F a 75°F. Reparaciones hechas a más bajas temeperaturas hará que la actuación del producto sea más larga.

FEATURES

Permanently repairs gasoline and diesel fuel tank leaks;
Repairs leaks within 20 minutes;
Harden within 8-10 minutes and cures in 30 minutes;
Repairs pinholes, rust-outs, hairline;
No draining and no welding required;

CARACTERÍSTICAS

Reparación permanente de fugas de depósitos de gasolina y diesel;
Repara la fuga en 20 minutos;
Tiempo de endurecimiento entre 8-10 minutos y actuación completa en 30 minutos;
Repara agujeros de alfiler, rayados ;
NO requiere drenajes ni soldaduras;

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8 to 28 °C (46 to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

ALMACENAMIENTO

El producto sería ideal mantenerlo en una zona fría y seca cerrada a temperaturas entre 8 a 20°C al menos que en la etiqueta diga lo contrario. La temperatura óptima para almacenarlo sería a la mitad de la temperatura indicada. Para evitar la contaminación de productos no usados, no reutilizar el envase original.



Part No:FG0028BW5P
 • Packing: 72pc/carton
 • Measure(cm): 39.5X33.0X45.0
 • N.W: 8.0kgs
 • G.W: 9.0kgs



Part No:FG0028BW1B
 • Packing: 48pc/carton
 • Measure(cm): 36.0X36.0X35.0
 • N.W: 4.5kgs
 • G.W: 5.5kgs

DIY ALLOY WHEEL REPAIR KIT

Kit reparador de la rueda de aleación

DESCRIPTION

Visbella® Alloy Wheel Repair kit is designed to permanently repair curb damages, scratches, slight dents, installation damages, sanding marks and other damages to alloy wheels, synthetic wheels, steel rims and hubcaps, and many more on similar surface material. Kit includes everything you need to fix scuffs and scratches in short time.

FEATURES

Permanent
Easy to repair
Heat resistant to 266 °F
Added value -Vibration, Carwash resistant

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8 to 28 °C (46 to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

DESCRIPCIÓN

Visbella® Alloy Repair Kit está diseñado para reparar de forma permanente los daños del bordillo, arañazos, pequeñas abolladuras, daños de instalación, macas de lijado y otros daños en las ruedas de aleación, ruedas sintéticas, llantas y tapacubos, y muchos más de material de superficie similar. El kit incluye todo lo que necesita para arreglar los rasguños y arañazos en corto tiempo.

CARACTERÍSTICAS

Permanente
Fácil de reparar
Resistente al calor hasta 266 °F
Valor añadido - vibración resistente al lavado de coches

ALMACENAMIENTO

Es ideal mantener el producto en una zona fría, lugar seco y cerrado a una temperatura entre 8°C a 28°C, al menos que se indique lo contrario. Lo óptimo sería mantenerlo a la mitad de la temperatura mencionada. Para evitar contaminaciones o accidentes no reutilizar el envase del producto con otros.



Part No:AG0011BW5P
 • Packing: 72pcs/carton
 • Measure(cm): 39.5X33.0X45.0
 • N.W: 7.9kgs
 • G.W: 8.9kgs



REMOVE ANY ROUGH EDGES OR UNEVENNESS AROUND THE DAMAGED AREA USING THE SANDING FILE



FILL IN THE TARGETED AREA USING THE REPAIR ADHESIVE



CLEAN THE TARGETED AREA THEN APPLY PAINT WITH THE PROVIDED BRUSH



Part No:AG0011BW1B
 • Packing: 48pcs/carton
 • Measure(cm): 36.0X36.0X35.0
 • N.W: 5.0kgs
 • G.W: 6.0kgs

DIY TOUCH SCREEN REPAIR KIT

DESCRIPTION

Visbella® DIY Touch Screen Repair Kit can be applied to a shattered touch screen glass phone or tablet to seal cracks and gaps. After drying, the glue seals these areas, giving you the ability to run your finger over the surface and get the same reaction you are used to. It does not change the physical look of the cracks, it does seal them from further cracking and physical damage to your skin. Odds are you will crack your glass screen at some point, have a bottle of our Touch Screen Repair Glue handy for the inevitable.

FEATURES

- USE YOUR PHONE/TABLET AGAIN! - Put the glue on your screen and you can still slide your finger and get the same touch to use action you always had. No more cut fingers!
- Seals Cracks in your Touch Screen Device, Repairs Gaps of missing glass up. Excellent Gap Filling & High Light Transmittance.
- It is easily removed, smaller amounts of glue can be used, easier to clean, flows well, & cures with no yellowing effect.
- Black Lightproof Bottle - ensures adhesive will remain in a liquid state, rather than harden like transparent tubes.

Note: It is sensitive to UV. Exposure to sunlight will cure adhesive, which is why all our tubes are black.

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8 to 28 °C (46 to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.



- Part No:TS0005CR5P**
- Packing: 72pcs/carton
 - Measure(cm): 39.5X33.0X45.0
 - N.W: 8.7kgs
 - G.W: 9.7kgs



DROP THE RESIN ON THE BREAK AREA



DROP THE RELEASE AGENT TO CLEAN THE EXTRA GLUE



PLACE THE CURING FILM UNDER THE SUNSHINE



CLEAN THE SCREEN WITH THE ALCOHOL PREP PAD



- Part No:TS0005CR1B**
- Packing: 48pcs/carton
 - Measure(cm): 39.5X33.0X45.0
 - N.W: 7.6kgs
 - G.W: 8.6kgs

PLASTIC & TRIM RESTORATION KIT

DESCRIPTION

Visbella® Plastic & Trim Restoration Kit product has good lubricity, can prevent the surface of the object from being rough and aging, and can effectively restore the original luster of the plastic and rubber parts such as the bumper, the door and the instrument panel, and keep the light as bright. It has the functions of cleaning, decontamination, glazing and curing.

FEATURE

Antioxidation
Renovating the surface of the object
Prevent fading
Avoid sun damage

USAGE

1. Clean the surface of the repair site before use
2. Apply a proper amount of product to the surface of the repaired area and wipe evenly with a clean towel.
3. After waiting for the product to absorb dryness, wipe off excess residue with a dry towel.



- Part No.:PA0150WE1B**
- Packing: 48pcs/carton
 - Measure(cm): 36.0X36.0X35.0
 - Net Weight: 12.0kgs
 - Gross Weight: 12.8kgs

DIY PLASTIC PLATE POLISHING

DESCRIPTION

Visbella® Plastic Plate Polishing is designed to assist in the repair of scratches and marks on your polymer panels. It can be used for repair and maintenance of your panel surface or to create beautiful features by polishing the edges of your panel to give that glass effect.

At times the process may need to be repeated to fully remove your scratch. Visbella DIY Polish Kit is designed for use on polymer panels only. Always test on an inconspicuous area of any other substrate as we cannot guarantee reparability of other materials.

FEATURES

Create beautiful polished edges
Return surface to original lustre
Polish out scratches

NOTE

At times the process may need to be repeated to fully remove your scratch. Visbella DIY Polish Kit is designed for use on polymer panels only. Always test on an inconspicuous area of any other substrate as we cannot guarantee reparability of other materials.



- Part No.:PG0065YW5P**
- Packing:42pcs/carton
 - Measure(cm):46.5×33.0×45.0
 - N.W.:7.3kgs
 - G.W.:8.3kgs

- Part No.:PG0065YW1B**
- Packing:36pcs/carton
 - Measure(cm):40.5×28.5×41.0
 - N.W.:7.0kgs
 - G.W.:8.0kgs

SEW GLUE Liquid

DESCRIPTION

Visbella® Sew Glue is a new type adhesive which is perfect for different craft materials like leather, fabric and decorative crafting with both natural and synthetic fabrics. It is designed to repair tear, to create quick costumes, make temporary stitching and DIY decorations. The glue dries clear, and remain soft & flexibility. A strong permanent bonding will be achieved very quickly & easily.

FEATURE

Easy to use
Flexible
Fast dry
Water resistant
High temp resistant to 100°C (212°F)



Part No.:SG0180WE1B

- Color: White
- Packing:24pcs/carton
- Measure(cm):40.5 × 38.3 × 21.7
- N.W.:6.0kgs
- G.W.:7.0kgs



Part No.:SG0060WE5P

- Color: White
- Packing:48pcs/carton
- Measure(cm):50.0 × 47.5 × 24.6
- N.W.:9.3kgs
- G.W.:10.3kgs



Part No.:SG0060WE0P

- Color: White
- Packing:144pcs/carton
- Measure(cm):51.0 × 26.0 × 27.0
- N.W.:11.0kgs
- G.W.:12.0kgs



Part No.:SG0120WE0P

- Color: White
- Packing:144pcs/carton
- Measure(cm):58.0 × 29.0 × 31.0
- N.W.:17.0kgs
- G.W.:18.0kgs

GOO CLEAN

DESCRIPTION

Visbella® Goo clean is mainly to remove the goos. Use for a variety of cleanup projects. Can removes window stickers, bird droppings, tree sap, spray paint, brake dust, asphalt and other goos.

FEATURE

Fast Working
No Harsh Odors
Clean Coat Safe

SAFE TO USE

Painted surfaces, plastics, ceramic/porcelain, glass, finished wood, stone , metals and ect.

NOTE

Silk, leather, suede, rubber, faux stainless steel, unfinished wood surfaces and upholstery.
Need use white cloth to wipe, don't use a colored cloth, otherwise goo clean will fade the cloth.



Part No.:GC0020LN0P

- Packing: 200pc/carton
- Measure(cm): 38.5x24.5x24.5
- Net Weight: 7.5kgs
- Gross Weight: 7.8kgs



Part No.:GC0020LN3P

- Packing: 96pc/carton
- Measure(cm): 47.5x33.0x45.0
- Net Weight: 5.0kgs
- Gross Weight: 5.5kgs

JELLY CLEANING GEL

DESCRIPTION

Visbella® Jelly Cleaning Gel is perfect for cleaning any item on surface with difficult to reach gaps and corners. It can clean electronics devices, appliances and Visibly removes dirt and dust cleaning enhances device performance. Jelly cleaning gel is ideal for nearly everything in your home, office and your car.

USAGE

- 1: Take jelly cleaning gel out of its packing and kneading it. Use only with dry hands.
- 2: Place jelly cleaning gel on the surface to be cleaned and press it gently into gaps or crevasses.
- 3: Pull jelly cleaning gel out and flod the dirt and dust inside. Repeat cleaning action for several times.



- Part No.:JG0160RD1P**
- Packing:48pcs/carton
 - Measure(cm):45.5×31.5×15.0
 - N.W.:9.23kgs
 - G.W.:10.23kgs



- Part No.:JG0080RD0A**
- Packing:100pcs/carton
 - Measure(cm):39.0×25.5×19.0
 - N.W.:8.7kgs
 - G.W.:9.7kgs



ALCOHOL GLUE

DESCRIPTION

Visbella® alcohol glue has characters of all purpose, easy operating and high adhesive, it's widely applied to rubber eva, carton, fabric, wood, cardboard, canvas, foam, cork, and paper, etc. silicone liquid alcohol glue is strong without corrosion or dissolving itself Easy-to-spread, convenient to use and low cost Quick to dry, water-resistant, clear after dry so not influence on stuck subject Cold hardness and suitable for freezer Exceptional bond strength and long lasting time Excellent heat and weather resistance.

USAGE

- 1.Surfaces to be glued must be dry clean and free from grease.
- 2.Apply adhesive evenly into both surfaces to be bonded.
- 3.Wait for about 10 to 15 minutes until the adhesive feels dry. Firmly paste both surfaces together. The strength of bond is determined by the amount of pressure applied, but not by the bonding duration.



- Part No.:SA0060CR0P**
- Color: Clear
 - Packing:144pcs/carton
 - Measure(cm):51.0×26.0×27.0
 - N.W.:11.0kgs
 - G.W.:12.0kgs



- Part No.:SA0100CR0P**
- Color: Clear
 - Packing:144pcs/carton
 - Measure(cm):58.0×29.0×31.0
 - N.W.:16.75kgs
 - G.W.:17.75kgs



- Part No.:SA0250CR0P**
- Color: Clear
 - Packing:72pcs/carton
 - Measure(cm):39.5×39.5×25.5
 - N.W.:19.75kgs
 - G.W.:20.75kgs

MS SEALANT

INSTRUCTIONS

Visbella® MS Sealant is a high performance, single component, moisturecuring, modified silane Multifunctional structural adhesive. Keep at room temperature before use. All surfaces must be clean and free from loose materials. Using a precision knife carefully cut off the plastic threaded nipple. Screw on nozzle and cut the end at the desired angle. Insert the SupaBond cartridge into a mastic gun to use.

STORAGE

Store in cool, dry conditions between 5°C and 25°C. Storage outside these parameters will dramatically reduce shelf life. Use within 12 months.

WILL BOND

- All metals(including lead)
- Glass
- Mirrors
- Ceramics
- Timber
- Fibreglass
- Plasterboard
- Tiles
- Concrete
- Marble
- Granite
- Most synthetic materials
- Most Plastics
- Even bonds and seals underwater!

**FIX ALL
ARREGLAR
TODO**



- Part No.:MS0075WE4A**
- Color: White/Black
 - Packing:144pcs/carton
 - Measure(cm):51.5×26.0×43.0
 - N.W.:10.80kgs
 - G.W.:12.96kgs



- Part No.:MS0150WEOP**
- Color: White/Black
 - Packing:144pcs/carton
 - Measure(cm):36.5×31.5×40.0
 - N.W.:21.6kgs
 - G.W.:24.5kgs



- Part No.:MS0300WE4A**
- Color: White/Black
 - Packing:300ml cartridge X 24pcs
 - Measure(cm):30.0×21.0×24.3
 - N.W.:14.0kgs
 - G.W.:15.0kgs



- Part No.:MS0590WEOP**
- Color: White/Black
 - Packing:590ml cartridge X 20pcs
 - Measure(cm):38.0×26.0×21.0
 - N.W.:16.5kgs
 - G.W.:17.3kgs



Interior
& Exterior
Use



High
Bonding
Strength



Water proof
& Weather
Proof



Temperature
Resistant
-40°C/100°C



Paintable
(Read label)



Odourless



Permanently
Flexible



Does Not
Shrink



Chemical &
Petrol
Resistant



UV
Resistant



Isocyanate
Free



Solvent
Free

GP SILICONE SEALANT

GP sellador de silicona

DESCRIPTIONS

Visbella® Silicone Sealant is single-component sealant. It's use for general purpose sealing and bonding.

DESCRIPCIÓN

Visbella® Silicón Selant es un sellador de componente único, usado para unir y sellar.

FEATURES

Good flexibility, multi - use, convenient to use.
 Excellen bonding ability on most basic materials, and good durability.
 Excellent aging resistant, moisture resistant, Anti-fungus.
 Good adhesion to many materials such as glass, stone, marble, granite
 curtain-wall, ceramic ,metals etc.
 Good characteristics of room-temp curing and fast strong bonding.
 High/cold temperature resistance performance.

CARACTERÍSTICAS

Buena flexibilidad, multiusos conveniente de usar
 Excelentes resultados ppara la unión de muchos materiales básicos y de buena duración.
 Excelente resistencia la envejecimiento, resistente a la humedad, anti hongos
 Buena adhesión para muchos materiales tales como el cristal, piedra, mármol, granito, muros de cortians, ceramica, metales, etc.
 Buenas características de actuación a temperatura ambiente y unión rápida y resistente.
 Rendimeinto de resistencia en altas y fria temperaturas

APPLICATION

- Used for all general purpose sealing and bonding
- Used in home decorations, window and door industry, wood, brick, ceramic, etc
- Widely used in Glass industry , Aluminum industry, Plastic industry etc.

APLICACIÓN

- Usado para unir y sellar.
- Usado en casa tales como decoración, ventanas y puertas, ladrillo de madera, ceramica, etc.
- Usado mucho en la industria del cristal, aluminio, plástico, etc.



- Part No:SN0280CR3P**
- Packing: 280ml cartridge X 24pcs
 - Measure(cm): 29.5x20.5x24.5
 - N.W: 6.7kgs
 - G.W: 7.7kgs



- Part No:SN0310CR3P**
- Packing: 310ml cartridge X 24pcs
 - Measure(cm): 29.5x20.5x24.5
 - N.W: 7.2kgs
 - G.W: 8.2kgs



**BUILDING
ADHESIVE**



WEATHER PROOF SILICONE SEALANT

Sellador de Silicona resistente a la intemperie

DESCRIPTIONS

Silicone sealant is single-component sealant. It's main raw material is silicone.

DESCRIPCIÓN

Silicone Sealant es un sellador con un componente único, la principal materia prima es la silicona.

FEATURES

- Single-component, neutral, room curing, high modulus, fast curing speed.
- High bonding strength, non-corrosive, have a strong seal with the majority of construction materials.
- Good adhesive capacity on many base materials, having excellent weatherability and aging resistance.
- After curing, formed a good material with ozone resistance, UV, rainwater resistance.
- Good compatibility with other neutral silicone sealants.

CARACTERÍSTICAS


- Componente único, neutro actuación rápida y excelentes resultados.
- Alta resistencia, no corrosivo, tiene un sellado fuerte con la mayoría de materiales de construcción.
- Buena adhesividad en muchos materiales básicos, excelente resistencia a la intemperie y al paso del tiempo.
- Después de ser utilizado se formará un material resistente al ozono.
- Compatible con otros selladores de silicona neutro.

WEATHERPROOF SILICONE SEALANT

RESISTENTE AL AGUA

- Excellent weatherproofing performance, Excellent anti-ultraviolet proper;
- No need to prime coated, excellent joint to most building material;
- Excellent compatibility with other neutral silicone sealants.

- Excelente resistencia a la intemperie y rayos ultravioletas.
- No hay necesidad de cubrir. excelente para la mayoría de conjuntos de materiales de construcción;
- Excelente compatibilidad con otros sellantes de silicona neutrales.

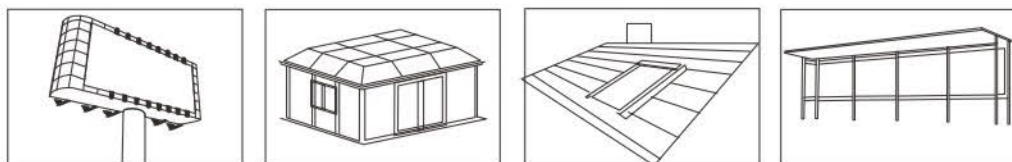

Part No:WS0300BK0P

- Packing: 300ml cartridge X 24pcs
- Color: Black
- Measure(cm): 29.5x20.5x24.5
- N.W: 6.7kgs
- G.W: 7.7kgs



Part No:WS0280CR0P

- Packing: 300ml cartridge X 24pcs
- Color: Clear
- Measure(cm): 29.5x20.5x24.5
- N.W: 6.7kgs
- G.W: 7.7kgs



Part No:WS0590WE0P

- Packing: 590ml cartridge X 20pcs
- Color: White
- Measure(cm): 38.0x26.0x21.0
- N.W: 16.5kgs
- G.W: 17.3kgs



Part No:WS0590BK0P

- Packing: 590ml cartridge X 20pcs
- Color: Black
- Measure(cm): 38.0x26.0x21.0
- N.W: 16.5kgs
- G.W: 17.3kgs

PVA GLUE

DESCRIPTIONS

Visbella PVA Glue is a Environment - friendly adhesive. It is primarily used for the adhesion of handiwork, furniture, paper, wood products, cloth, laminates, building materials. By adding some modifi - cations, this emulsion can also be used for textile processing.

DIRECTIONS

Surfaces must be clean and dry. Open cap, tip bottle and squeeze glue onto craft project or caontainer. If using with paintbrush wash immediately with water after use. Close cap of bottle when not in use.

IMPORTANT NOTE

This adhesive has a shelf life of 24 months from date of manufacture when stored in unopened containers in accordance with the manufacturer s instructions.

WARNING

Non-Toxic
Removable from most fabrics. Wash garment immediately whilst glue is still wet.
Keep out of reach from children.

Washable

Dried clear

Fast bond

Non toxic



Coating additive



Leather



Wood



Cotton fabric



Paper



Part No:PG0060WE0P

- Packing: 60ml Bottle X 144pcs
- Color: White
- Measure(cm): 51.0x26.0x27.0
- N.W: 11.0kgs
- G.W: 12.0kgs



Part No:PG0120WE0P

- Packing: 120ml Bottle X 144pcs
- Color: White
- Measure(cm): 58.0x29.0x31.0
- N.W: 17.0kgs
- G.W: 18.0kgs



Part No:PG0250WE0P

- Packing: 250ml Bottle X 24pcs
- Color: White
- Measure(cm): 30.5x20.5x21.0
- N.W: 6.0kgs
- G.W: 6.6kgs



Part No:PG0500WE0P

- Packing: 500ml Bottle X 24pcs
- Color: White
- Measure(cm): 40.0x26.5x24.0
- N.W: 12.0kgs
- G.W: 13.2kgs

THREAD LOCKER & SEALING (ANAEROBIC SEALANT)

Armario de Rosca y Sellado

DESCRIPTION

Visbella® The Anaerobic Thread Locker is designed for locking and sealing of screw thread. The product cures when confined in metal without air. It protects threads from rust and corrosion and prevents loosening from shock and vibration. Anaerobic thread locker is mainly made of acrylate, curing agent, which have different viscosity and bonding strength requirements.

DESCRIPCIÓN

Visbella® The Anaerobic Tread Locker esta diseñado para cerrar y sellar tornillos de rosca. Este producto actua cuando esta confinado en metal sin aire. Esto protege las roscas de moho y corrosión y previene el aflojamiento por choque y vibración. El hilo anaerobio esat principalemte hecho de acrilico, actuando en agentes los cuales tiene diferente viscosidad y requieren una fijación fuerte.

USAGE

Thread Locker sealing is widely used in automobile, machinery, electronic, electrical appliance, hardware thread clamp, pipe thread sealing, Clamp nut, bolt and screw, in order to avoid vibration and the filler metal parts shall keep enough space between the screw and nut effectively for operation easily.

USO

El sellador de casilleros es usado para automóviles, máquinas, electrónicos, aplicaciones eléctricas, trabajo de ferreterías, tuberías, tuercas de fijación, pernos y tornillos, para evitar la vibración y partes de relleno de metal de mantendrá un espacio suficiente entre el tornillo y la fijación efectiva para una operación fácil.



ITEM Artículo	Color Color	Viscosity (mp·s) Viscosidad	Operation Temperature(°C) Temperatura	Surface dry time (min) Tiempo de secado	full cure time (h) Tiempo completo de actuación
6642	Blue Azul	1200~1500	-60~150	10~15	24
6662	Red Rojo	1200~2400	-60~150	10~15	24
6671	Red Rojo	400~600	-60~150	10~15	24
6672	Red Rojo	4000~5000	-60~230	30	24
6677	Red Rojo	6000~8000	-60~150	30	24
6690	Green Verde	25~55	-60~150	10	24
6622	Purple Morado	1200~5000	-60~150	20	24
6643	Blue Azul	1300~3000	-60~150	10	24
6610	Yellowish Amarillento	3000~8000	-50~150	≤30	24
6650	Red Rojo	2500	-50~150	30	24
6670	Red Rojo	5500	-50~150	30	24
6677	Yellowish Amarillento	7.0x10 ⁴ ~ 1.3x10 ⁵	-50~150	≤30	24
6667	Milky Lechoso	2.8x10 ⁵ ~ 8.0x10 ⁵	-50~200	30	24
6571	white Blanco	2.3x10 ⁵	-54~150	1200	24



Part No:TH7100053P
Packing: 5ml plastic bottle x 2500pcs
Measure(cm): 62.0x32.5x65.0
Net Weight: 12.5kgs
Gross Weight: 29.0kgs



Part No:TH7100103P
Packing: 10ml blister x 144pcs
Measure(cm): 36.5x33.0x33.0
Net Weight: 1.44kgs
Gross Weight: 5.30kgs



Part No:TH7100500P
Packing: 50ml plastic bottle x 144pcs
Measure(cm): 37.0x36.0x35.5
Net Weight: 7.2kgs
Gross Weight: 11.7kgs



Part No:TM4200053P
Packing: 5ml plastic bottle x 2500pcs
Measure(cm): 62.0x32.5x65.0
Net Weight: 12.5kgs
Gross Weight: 29.0kgs



Part No:TM4200103P
Packing: 10ml blister x 144pcs
Measure(cm): 36.5x33.0x33.0
Net Weight: 1.44kgs
Gross Weight: 5.30kgs



Part No:TM4200500P
Packing: 50ml plastic bottle x 144pcs
Measure(cm): 37.0x36.0x35.5
Net Weight: 7.2kgs
Gross Weight: 11.57kgs

Volume / Volumen	Packing / Envasado	Carton Size / Tamaño del cartón
(0.5mlx3) bottle blister card	200pc/ctn	43.5 x 35.5 x 34.0 cm
5ml bottle blister card	144pc/ctn	28.5 x 31.5 x 35.5 cm
10ml bottle blister card	144pc/ctn	39.5 x 31.5 x 35.5 cm
50ml plastic bottle	144pc/ctn	37.0 x 36.0 x 35.5 cm
50ml plastic tub	144pc/ctn	48.0 x 24.5 x 43.5 cm
250ml plastic bottle	24pc/ctn	45.5 x 24.5 x 24.0 cm

EPOXY AB GLUE

Exposy (AB) Glue



DESCRIPTION

Visbella® Epoxy (AB) Glue is a kind of double component room temperature fast curing sealant. It is widely used in machinery and equipment, auto parts, sports equipment, metal-tools and accessories, rigid-plastic or other emergency repair. Fast bonding and packaging, after curing has excellent bonding strength, acid and alkali resistance, moisture-proof and water proof, oil-proof and dustproof good performance, high-heat and air-aging.

DESCRIPCIÓN

Visbella® Exposy (AB) Glue es un tipo de sellador de actuación rápida de temperatura ambiente de doble componente. Es un instrumento ampliamente utilizado en maquinaria y equipos, piezas de automóviles, equipo de deporte, metal, herramientas y accesorios, plástico rígido u otras reparaciones de emergencia. Adhesión rápida y embalaje. Después de que actua tiene una excelente fuerte unión resistente al ácido y álcali, a prueba de humedad, agua, aceite y polvo buen rendimiento, alto calor y aireación.

FEATURES

Can be tinted
Water-resistant
High impact resistance
Epoxy adhesives combine exceptional strength and durability, bonds trim and ornaments.
Resistant to gasoline, anti-freeze and most solvents.

Will not shrink
Set in 5 minutes
Convenient syringe

CARACTERÍSTICAS

Puede ser teñido
Resistente al agua
Resistente a altos impactos
Aaaaaaepoxy adhesivo combina excepcionalmente con fuerza y durabilidad.
Resistente a la gasolina, anticongelantes y más disolventes.

No se encoge y se pone en 5 minutos
Conveniente jeringilla

USAGE

Epoxy Adhesive can be bond, repair, and patch almost any articles like metallic, glass, ceramic, china, wooden material, except nylon, silicone, fluorine, resin, soft PVC, rubber, polyethylene and polypropylene. It can be used to repair electrical appliances, ceramic tiles, wooden, metallic, concrete, glass articles, household and DIY applications to bond crystal, glass, jewelry.

USO

Epoxy Adhesivo pueden encajadar, ligar, reparar y parchar casi todos los artículos como el metal, cristal, cerámica china, material de madera excepto nylon, silicona, flúor, resina, caucho, polietileno y polipropileno. Puede ser utilizado para aplicaciones eléctricas, azulejos de cerámica, madera, metal, hormigón, artículos de cristal, menaje, cristal y joyas

Type	Content	Appearance	Packing	Measure(cm) /ctn
Epoxy	3ml+3ml syringe blister card	Black+White/ Clear+Clear	144pc/ctn	33.5X25.5X33.5
	8ml+8ml syringe blister card		144pc/ctn	41.0X38.5X47.0
	12.5ml+12.5ml syringe blister card		144pc/ctn	41.0X38.5X47.0
	10ml+10ml tub blister card		100pc/ctn	40.0X33.0X17.0
	20ml+20ml tub blister card		144pc/ctn	31.5X22.1X22.5
	28.35ml+28.35ml tub blister card		144pc/ctn	37.9X33.5X38.0



Part No:EQ0040CC3A
Packing: 40ml blister x 144pcs
Measure(cm): 37.9x33.5x38.0
Net Weight: 5.3kgs
Gross Weight: 7.3kgs



Part No:EQ0057BW3A
Packing: 57gm blister x 144pcs
Measure(cm): 37.9x33.5x38.0
Net Weight: 7.7kgs
Gross Weight: 9.7kgs



Part No:EQ0006CC3P
Packing: 6ml blister x 144pcs
Measure(cm): 33.5x25.5x33.5
Net Weight: 1.0kgs
Gross Weight: 4.0kgs



Part No:EQ0006BW3P
Packing: 6ml blister x 144pcs
Measure(cm): 33.5x25.5x33.5
Net Weight: 1.0kgs
Gross Weight: 4.0kgs



Part No:EQ0025CC3P
Packing: 25ml blister x 144pcs
Measure(cm): 41.0x38.5x47.0
Net Weight: 8.5kgs
Gross Weight: 10.5kgs



Part No:EQ0025BW3P
Packing: 25ml blister x 144pcs
Measure(cm): 41.0x38.5x47.0
Net Weight: 8.5kgs
Gross Weight: 10.5kgs




Repair Pipe Leaking
Reparación de fugas de tubería



Valve Repair
Reparación de válvulas



Water Tank
Depósito de agua



Repair Tank Leaking
Reparar el tanque de fugas

EPOXY PUTTY

Epoxi masilla

DESCRIPTION

Visbella® Epoxy Putty is an hand-mixable and fast-setting two part adhesive which are mixed by kneading. It is widely used in daily repair, machinery, equipment and can bond, fill and rebuild with excellent bond strength. It does not shrink and is resistant to most common solvents. This putty can also be sanded, drilled and painted.

DESCRIPCIÓN

Visbella® Epoxy es una mezcla a mano y rápida dos partes adhesivas las cuales estan mezcladas por amasamiento. Es ampliamente utilizado para reparaciones a diario, maquinaria, equipamiento y unión. Rellena y reconstruye con un fuerte acabado. No encoge y es resistente a los mas comunes disolventes. Esta masilla puede ser incluso lijada, perforada y pintada

FEATURES

Easy to shape
High strength
Will not shrink
Wide usage: bond, fill, fix, seal
Can be sanded, drilled and painted

CARACTERÍSTICAS

Facil de moldear
Alta resistencia
No encoge
Amplio uso: fija, rellenar, repara y sella
Puedes ser lijado, perforado y pintado

USAGE

Epoxy putty is widely used in daily repair and can bond many materials including metal, glass, plastic, wood, ceramic, tile, stone and much more. Also it works on almost any surface and can fill, fix, seal almost anything fast and make it last.

USO

Epoxyse puede utilizar para reparaciones diarias, puede fijar muchos materiales incluidos el metal, cristal, plásticos, madera, cerámica, azulejos, piedras, y muchos más. Tambien actua en casi todas las superficies y puede rellenar, reparar, sellar casi cualquier cosa rápida y de manera duradera.



Part No:EQ0028BW0P
Packing: 28.35gm x 216pcs
Measure(cm): 22.5x18.5x36.0
Net Weight: 8.0kgs
Gross Weight: 9.0kgs



Part No:EQ0057WW0P
Packing: 57gm x 216pcs
Measure(cm): 52.5x23.5x19.0
Net Weight: 14.0kgs
Gross Weight: 15.0kgs



Repair Pipe Leaking
Reparación de fugas de tubería



Valve Repair
Reparación de válvulas



Water Tank
Depósito de agua




Repair Tank Leaking
Reparar el tanque de fugas



Part No:EQ0057BW3P
Packing: 57gm blister x 144pcs
Measure(cm): 39.5x36.5x40.0
Net Weight: 11.5kgs
Gross Weight: 13.0kgs



Part No:EQ0030BW3P
Packing: 5gm x 6 blister x 144pcs
Measure(cm): 31.0x20.0x36.5
Net Weight: 6.0kgs
Gross Weight: 7.0kgs

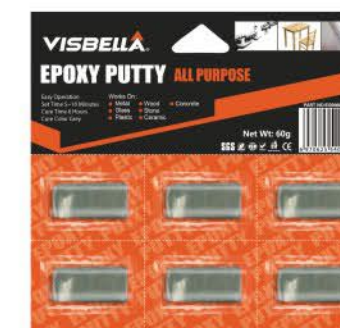

Part No:EQ0060BW3P
Packing: 10gm x 6 blister x 144pcs
Measure(cm): 45.5x45.0x35.0
Net Weight: 11.0kgs
Gross Weight: 12.0kgs

SUPER GLUE

Super pegamento

DESCRIPTION

Visbella® Super Glue is ideal fast dry glue for bonding various materials including metal, rubber, ceramic, leather, wood, glass, paper, most plastics and others.

DESCRIPCIÓN

Visbella® Super Glue es ideal, pegamento de secado rápido unir varios materiales incluyendo el metal, caucho, cerámica, cuero, madera, cristal, la mayoría de plásticos y otros.

FEATURES

Fast cure
High bond strength
Multi Usage

CARACTERÍSTICAS

Rápida actuación
Alta adherencia
Multiusos



Part No:SQ0020CR0P
Packing: 20gm x 240pcs
Measure(cm): 41.0x21.0x24.0
Net Weight: 8.4kgs
Gross Weight: 9.4kgs



Part No:SQ0050CR0P
Packing: 50gm x 240pcs
Measure(cm): 58.0x27.0x27.0
Net Weight: 16.7kgs
Gross Weight: 17.7kgs



Part No:SQ0100CR0P
Packing: 100gm x 80pcs
Measure(cm): 29.0x24.0x37.0
Net Weight: 10.63kgs
Gross Weight: 11.63kgs

Ingredient	Appearance	Flash Point	Cure Time (steel)	Shear Strength	Shelf Life
Ethyl-cyanoacrylate	Clear liquid	> 80°C (176°F)	10 seconds	> 8 N/mm ²	12~15 months

DIRECTIONS

CAUTION: Tube opens when cap/nozzle are screwed onto tube. Tube must be pierced before using! Point tube away from face and body. Do not squeeze tube while puncturing. To puncture, screw nozzle and cap assembly onto tube completely. To use, remove outer cap. Use sparingly. Apply glue to one surface to be bonded. Press pieces together for 15 seconds. Clean tip after use. Replace outer cap and store in cool, dry place.

PRECAUCIÓN


Para abrir el tubo debemos primero con el lado exterior la tapa pinchar la parte superior del tubo y hundirla hasta el tope, luego enroscar este con la tapa o boquilla, mantener alejado de cara y cuerpo. No apretar el tubo mientras hacemos el pinchazo. Usar muy poco; Apilar el pegamento solo en una de las superficies que queramos unir, Pacionar las piezas juntas por 15 segundos, limpiar la punta despues de su uso; Colocar la tapa y mantenerlo en un lugar fresco y seco;



Part No:SQ0003CR3A
Packing: 3gm blister x 288pcs
Measure(cm): 56.0x38.5x36.6
Net Weight: 5.0kgs
Gross Weight: 6.0kgs



Part No:SQ0006CR3A
Packing: 3gm x 2 blister x 280pcs
Measure(cm): 56.0x38.5x36.6
Net Weight: 7.5kgs
Gross Weight: 8.5kgs

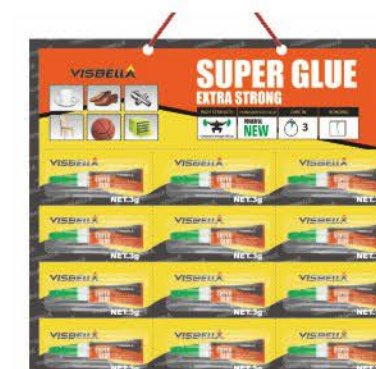

Part No:SQ0036CR3A
Packing: 3gm x 12 blister x 72pcs
Measure(cm): 60.0x32.0x55.0
Net Weight: 10.0kgs
Gross Weight: 11.0kgs

GREASE

DESCRIPTION

This product uses special high fatty acids mixed metal SOAP thickness, with refined mineral oil as the base oil, antioxidant, anti-rust agents, dyes and other additives.

FEATURES

- Look pale blue semi-transparent, uniform fine soaps fibers,
- Some biodegradation.
- Good mechanical stability, not running thin ,long service life.
- Good water resistance, difficult to drain.
- Excellent anti-corrosion properties.

APPLICATION

Applies to machinery, vehicle lubrication of roller bearings and plain bearings, particularly applied to agricultural machinery lubrication, can be substituted for universal lithium grease.



AUTO CARE PRODUCTS



- Part No.GRE0400P**
- Packing:400g(16.0oz) x 24pc/carton
 - Measure:34.5*23.5*25.5cm
 - Weight:10.6kgs



- Part No.GRE0453P**
- Packing:1lb(453g) x 24pc/carton
 - Measure:41.0*31.0*21.0cm
 - Weight:13.0kgs



- Part No.GRE0500P**
- Packing:5lb(2.26kgs) x 12pc/carton
 - Measure:52.5*35.5*39.5cm
 - Weight:29.5kgs



- Part No.GRE1000P**
- Packing:10lb(4.53kgs) x 1pc/carton
 - Measure:21.0*21.0*21.0cm
 - Weight:5.0kgs

GREASE/GRASA

CAUTION


Contains isopropyl alcohol. Do not use or store near heat, spark or open flame. Keep container closed when not in use. Avoid contact with eyes and prolonged contact with skin. Do not breathe vapors. Do not swallow. In case of eye contact, flush with water for 15 minutes; call a physician. For skin contact, wash thoroughly with soap and water. If swallowed do not induce vomiting; call a physician immediately. If overcome by fumes, get fresh air. If this product is used in an OSHA regulated workplace, consult the MSDS available from you distributor before use.

KEEP OUT OF THE REACH OF CHILDREN.

PRECAUCIONES


Contiene alcohol isopropilico. No lo use u almacenar en presencia del calor, chispas o flama abierta. Mantenga el envase cerrado cuando no lo use. Evite el contacto con los ojos y el contacto prolongado con la piel. No respire los vapores. No lo ingiera. Si se ingiere, no induzca el vómito; consulte al médico. En contacto con los ojos, enjuague con agua abundante por 15 minutos; consulte al médico. En contacto con la piel, lave bien con agua y jabón. En caso de asfixia por los vapores, trasládese al aire fresco. Si este producto es usado en un área de trabajo regulada or OSHA, consulte las Hojas de Datos de Seguridad del Material disponibles con su distribuidor antes de usarlo.

NO SE DEJE AL ALCANCE DE LOS NIÑOS.

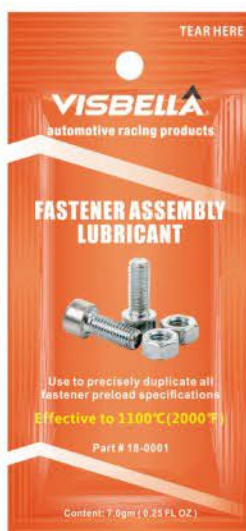

Part No. GRE0071B

- Packing: 600 pcs (50 pc x 12 box)
- Measure: 36.0 x 21.0 x 25.5 cm
- Weight: 6.5 kgs

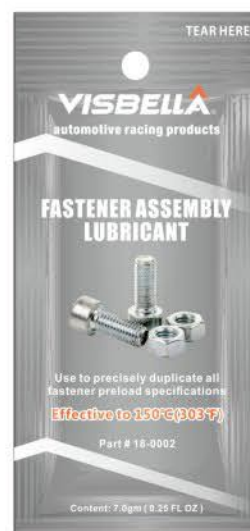

BRAKE FLUID



VISBELLA brake fluid dot3 is a specially compounded preparation designed solely for use in motor vehicle braking systems. use in all vehicles where grade dot3 is recommended by the manufacturer. Mess DOT3 Fedral Standard N0.116. Exceeds Federal MotorVehicle Standards SAE-J1703.

Follow vehicle manufactures's recommendations when adding brake fluid, keep brake fluid clean and dry. Any contamination with dirt, water, petroleum products or other materials may result in brake failure or other constly repairs. After us replace cap and keep container rightly closed to prevent absorption of moisture, Store brake fluid only in original container. Do not refill afterthe seal is broken or use for Storage of other liquids. Avoid spilling on brakelinings.

CAUTION

Contains petroleumlubricants. Avoid proloonged contact wash skin with plenty of soap and water. Laundersoiled clothes before use. Discard il-soaked shoes.

KEEP OUT OF REACH OF CHILDREN!

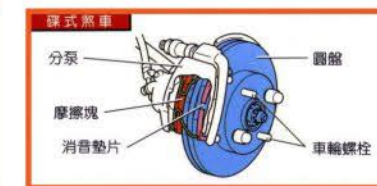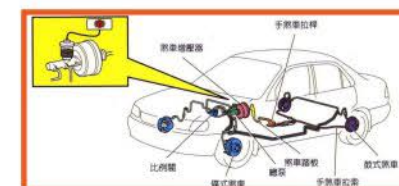

Part No. BRK0250R

- Packing: 250ml (8.8oz) x 24pc/carton
- Measure: 41.0*21.5*13.5cm
- Weight: 7.5kgs



Part No. BRK0355R

- Packing: 355ml (12.5oz) x 24pc/carton
- Measure: 41.0*21.5*16.5cm
- Weight: 10.5kgs



Part No. BRK0500R

- Packing: 500ml (17.6oz) x 24pc/carton
- Measure: 41.0*21.5*20.5cm
- Weight: 13.5kgs



Part No. BRK0946R

- Packing: 946ml (33.3oz) x 12pc/carton
- Measure: 36.0*27.0*24.0cm
- Weight: 13.5kgs

CAR POLISH

WARNINGS:

If inhaled: move to fresh air area, if experiencing shortness of breath seek medical attention.
 If ingested: Immediately rinse mouth and drink plenty of water or milk, do not induce vomiting.
 Contact with skin: Remove contaminated clothing and wash skin with soap and water.
 Eye contact: Immediately flush with plenty of water for up to 15 mins, if problems persist seek medical attention.

DIRECTIONS:

For best results apply with a sponge. Leave to dry or wipe with a soft cloth for a deep brilliant shine.

- Water repellent
- Deep Shine
- UV Protection
- Easy on Easy off



- Part No. CP03001B**
- Packing: 300ml x 24 pcs/carton
 - Measure: 47.5 x 25.0 x 23.5cm
 - Weight: 6.5kgs

BRAKE CLEANER BREMSSEN-REINIGER

FUNCTION

Global brand brakes cleaning agent using the latest advanced formula, with a strong clean, and quick, can easily and quickly brake discs, brake hub brake and other parts of asbestos dust, impurities like iron and oil removed. To avoid the brake disc (brake drum) for adhesion of asbestos dust, iron and oil and slipping. This product is environmentally non-fluorocarbon compounds in special solvents, and the operating environment on the natural environment has no effect.

NOTE

Do not swallow! If taking your doctor immediately when stored away from heat and children

USAGE

To clean the spray area, completely clean up until the dust and grease, then wipe with a clean towel, leaving dust and residue.

REMEDIES AND LIMITATION OF LIABILITY

The Universal products are proved to be a flawed case. Universal remedy for the refunding to provide, repair or replacement. Whether for including negligence, warranty or strict liability of legal theory, the global on the other direct, indirect, special, incidental, consequential loss or damage is not liable.



- Part No. BRA0450C**
- Packing: 450ml (10.0oz) x 12pc/carton.
 - Measure: 27.5 x 21.5 x 20.5cm
 - Weight: 5.0kgs

CARBURETOR & CHOKE CLEANER

Limpiador electrónico

It cleans the carburetor completely, dissolving coal deposits, mud and varnish. Its powerful cleanser agents always keep the carburetor and valves clean, facilitating the performance of the parts that are in constant movement.

INSTRUCTIONS

With the engine off:

remove the air filter and apply on the carburetor surface. To clean PVC valves, disconnect them and apply the product moving the valves from one side to the other. Avoid any electrical connection. **THIS MUST BE DONE WHEN THE ENGINE IS COLD.** With the engine on: apply the product inside the carburetor if the engine turns off, stop applying the product and turn on the engine again (Do not drive). Place the air filter when you finish applying the product.

HEALTH AND SAFETY

Content : methanol, toluene, ethylene glycol monobutyl ether, dichloromethane. **!AVOID INHALING!** If skin contact, wash with plenty of water and soap. Highly flammable product. Keep it away from ignition sources. Do not store the product in warm close areas because the accumulation of vapors can cause an explosion and intoxicate a person. **KEEP OUT OF REACH OF CHILDREN.** Dispose the container separately, let's not pollute our environment.



Part No. CAR0450C

- Packing: 450ml (15.0oz) x 12pc/carton.
- Measure: 26.5 x 20.0 x 20.7cm
- Weight: 4.7kgs



Part No. CAR0550C

- Packing: 550ml (18.7oz) x 12pc/carton.
- Measure: 27.5 x 21.5 x 20.5cm
- Weight: 5.0kgs

MOTOR FLUSH

3 Minutos

Due to its solvent detergent additive formula, Motor Flush wash your engine, Keep it clean and in good condition, removing sludge deposits, gum and varnish that damage the engine.

PROPERTIES

Effectively removes deposits and internal residues of substances harmful to the engine. The formula contains a powerful detergent solvent. Maintains completely free valves and rings, preventing them from sticking. Extends engine life, improving its performance, capacity and strength. Can be used in gasoline and oil.

INSTRUCTIONS

Make sure the oil is in its appropriate level.

Before changing the oil and filter, add the total content of Motor Flush when the engine is cold. Immediately after starting the engine without driving, let it work for 3 to 5 minutes.

Remove the drain plug and oil filter draining all the oil used.

Put the drain plug and install a new filter. Fill up with new oil crankcase to the required level.

PRECAUTIONS

Stay away from fire, heat and / or sparks.

Avoid contact with clothing and paint car, if it occurred, immediately rinse with cold water.

Use in well ventilated areas.

If swallowed, do not induce vomiting. Seek for medical attention immediately.



Part No. MOT0443C

- Packing: 443ml (15.6fl.oz) x 24pc/carton.
- Measure: 41.0 x 21.5 x 17.5cm
- Weight: 11.5kgs

ELECTRONIC CLEANER

Limpiador electrónico

Effective cleanser for electrical and electronic contacts. It works in the removal of grease, oil, dust and dirt. It protects avoiding humidity and increasing its dielectric capacity.

INSTRUCTIONS


Turn off or disconnect the equipment before cleaning. It is better to use the product in a ventilated place. Apply several times until the area is completely clean. Its dries fast and it allows an efficient welding. If it is very dirty, remove the dirty with a paintbrush or a soft bristle brush. If there is any condensation after applying the product, clean with a towel or flannel.

HEALTH AND SAFETY

Content: Heptane, carbon dioxide, synthetic aliphatic and treatable Hydrocarbons. If skin contact, wash with plenty of water and soap. Highly flammable product, keep away from ignition sources. Do not store the product in warm close areas because the accumulation of vapors can cause an explosion and intoxicate a person.

KEEP OUT OF REACH OF CHILDREN.

Dispose the container separately and do not pollute our environment. to heat, do not puncture or incinerate the container.

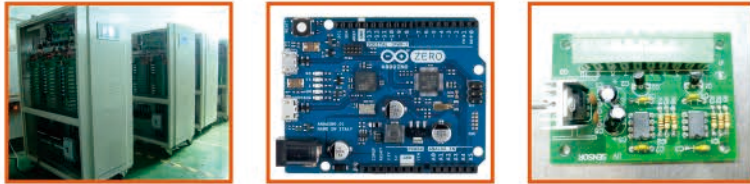

Part No. ELE0450C

- Packing:450ml (10.0oz) x 12pc/carton.
- Measure:26.5 x 20.0 x 20.7cm
- Weight:4.7kgs



Part No. ELE0550C

- Packing:550ml (12.5oz) x 12pc/carton.
- Measure:26.5 x 20.0 x 22.6cm
- Weight:5.4kgs

FUEL INJECTION CLEANER

Limpiador inyector de combustible

It is a product made from solvents and scaling detergents, ideal to climatize dirty injectors without dismantle them. Its great solving power allows washing, dragging and cleaning sediments accumulated inside the injector; which negative effects prevent fuel proper pulverization.

APLICACIONES

It is recommended for all type of gasoline vehicles with fuel injection system that have problems for lack of power due to dirty or obstructed injectors that require instant cleaning.

PROPERTIES

- Excellent injectors, valves and combustion chamber cleaning power.
- It does not damage the catalytic converter nor the oxygen sensor.
- It improves combustion and reduces fuel consumption.
- It reduces injectors corrosion.
- It removes gumminess and varnishes.

INSTRUCTIONS

- Spray all parts with product and scrub with brushes to facilitate dirt removal.
- Use the injector application tube to apply product in narrow places.
- Cleans easily synthetic materials such as neoprene, viton and rubber.



Part No. INJ0450C

- Packing:450ml (10.0oz) x 12pc/carton.
- Measure:27.5 x 21.5 x 20.5cm
- Weight:5.0kgs

SPRAY WHITE LITHIUM GREASE

Grasa delitio blanco

Multipurpose lubricant grease made from lithium soap. It has a high penetration that enters easily to difficult access areas. Unlike conventional greases, it reduces friction, prevents wear and avoid metallic parts corrosion.

APLICANTIONS

It can be apply in the lubrication of battery terminals, brake cables, rollers, chains, lathes, gear, bearings, velocity joints, door slides, fans, windows, hinges and machine tools in general.

PROPERTIES

- Excellent fluidity, it penetrates in inaccessible places
- It provides resistant and long lasting lubrication
- Effective in extreme weather conditions, resistant to water and heat
- It removes humidity during application
- It does not leak, melt or freezes

INSTRUCTIONS

- Shake the spray before using
- Spray the surface to protect and lubricate. Introduce the extension tube for difficult access areas.



Part No. WHI0450C

- Packing: 450ml (10.0oz) x 12pc/carton.
- Measure: 27.5 x 21.5 x 20.5cm
- Weight: 5.0kgs

LIBRICANT OIL

Pulverizar aceite lubricante de

LIBRICANT OIL all-purpose super Spray, anti-corrosive high power product; it dissolves all kinds of oxides and loosens the screws, nuts and hinges. It performs 5 functions in only one product.

PROPERTIES

- Penetrates and loosens oxidation, unsticking stuck metallic pieces. Eliminates squeals.
- High grease and oxides cleaning power, it also dissolves stickers stick to the surface.
- Lubricates the applied part, forming a protection film.
- Dose not have additives that attract dust.
- Moves humidity, it quickly dries the electrical systems eliminating electric arcs and short circuit.
- Protects metallic surfaces against corrosion; its antioxidant components inhibit all possible oxide formation due to humidity.

INSTRUCTIONS

- Apply to surface and let soaking for several minutes, then clean.
- To protect against oxidation, you should not clean the excess.
- Move the container before use.



Part No. LUB0250C

- Packing: 250ml (5.5oz) x 24pc/carton.
- Measure: 31.7 x 21.4 x 20.7cm
- Weight: 5.5kgs



Part No. LUB0450C

- Packing: 450ml (5.5oz) x 12pc/carton.
- Measure: 26.5 x 20.0 x 20.7cm
- Weight: 4.7kgs

DASHBOARD POLISH

Dasgboard polaco-reiniger

VISBELLA protective silicone is a high quality product. Its exclusive formula adheres to surfaces to provide great shine and long lasting fresh scent. It can be used in surfaces such as vinyl, plastic, leather, electronic boards, car accessory, sport equipment, etc.

INSTRUCTIONS

Spray directly on the surface, keeping a 20 cm distance approximately. Then, slightly rub with a dry and clean cloth until it is shining.

HEALTH AND SAFETY

Content: Polydimethylsiloxane, solvents, protective additives and scents. If skin contact, wash with plenty of water and soap. Highly flammable product, keep out of ignition source. Do not store the product in warm close areas because the accumulation of vapors can cause an explosion and intoxicate a person.



Part No. DAS0450C

- Packing:450ml (10.0oz) x 12pc/carton.
- Measure:26.5 x 20.0 x 20.7cm
- Weight:4.7kgs



Part No. DAS0750C

- Packing:750ml (14.0oz) x 12pc/carton.
- Measure:26.5 x 20.0 x 34.5cm
- Weight:5.4kgs

ENGINE DEGREASE

VISBELLA degine degrease with strong penetration and emulsifying power,the product can remove the build up grease,smudges and dirt so as to protect the appearance and maintain facilitate dissipation of heat. No ham to rubber, plastic and paintes surface. Suitable for cars, trucks vans, tractors and all other types of vehicles.

DIRECTIONS

Warm up the engine and shut off.Cover any items with plastic which are sensitive to water and are not factory sealed. Apply generously to dry engine at a distance of 30cm and allow to penetrate for 15mins.wipe off the over-sprayed.then flush with water,use a brush if necessary.Do not remove the plastic until the engine gets dry.

CAUTION

Contents under pressure. Extremely flammable ! do not puncture, incinerate,Do not take intemally and avoid contact with eyes and skin. In case of contact,flush with water for 15mins.if ingested, seek medical attention immediately.

KEEP OUT OF REACH OF CHILDREN!



Part No. ENG0600C

- Packing:600ml (21.0oz) x24pc/carton.
- Measure:41.0 x 27.0 x 29.2cm
- Weight:15.5kgs

MULTI-PURPOSE FOAM CLEANER

Mutil propósito del aspirador

FEATURES:

VISBELLA MULTI-PURPOSE FROM CLEANER has strong decontamination gene, active foam. It's effective in cleaning any washable surface and deep Layers. It's powerful foaming action removes grime and stains from vinyl, fabric, carpeting, panel board, side board, roof of a car for a brand-new appearance, including automobile, motorcycle, launch, etc. For household, it's excellent for cleaning appliances, formica, porcelain chrome, bathroom fixture, ceramic tile, window and ceiling fans painted walls, wood,metal, fabric, plastic, etc. This product does not contain phosphate, which pollutes the environment and hurts our skin. It can produce rich foam and is easily used.

DIRECTIONS:

1. Shake the can well before use.
2. Spray directly onto the surface to be cleaned at a distance of 10- 20cm.
3. Allow foam to penetrate for about 30-40second, wipe off with dry cloth. (As for fabric cloth art items, spray this product on a hidden point of it to check if it fades or produces some stains, as for glasses and metal, clean them before foam do not dry to avoid producing stains.)
4. If necessary, please repeat it.



- Part No. FOA0600C**
- Packing:600ml (21.0oz) x 12pc/carton.
 - Measure:27.5 x 21.5 x 30.0cm
 - Weight:8.5kgs

AUTO AIR CONDITIONER CLEANER

Aire acondicionado

FUNCTION

Use of environmentally friendly biodegradable cleaning active ingredients, in particular to add new long-acting non-toxic antimicrobial agent.


- automotive air conditioning system to remove the dirt road in the dust and fixtures.
- Elimination of air conditioning in the adhesion of a variety of pathogenic bacteria.
- decomposition of various volatile organic compounds, mold and harmful bacteria to prevent breeding,

USAGE

Spray the cleaner evaporate in the air-conditioning system pipelines and tank surface.

REMEDIES AND LIMITATION OF LIABILITY

The Universal products are proved to be a flawed case. Universal remedy for the refunding to provide, repair or replacement. Whether for including negligence, warranty or strict liability of legal theory, the global on the other direct, indirect, special, incidental consequential loss or damage is not liable.

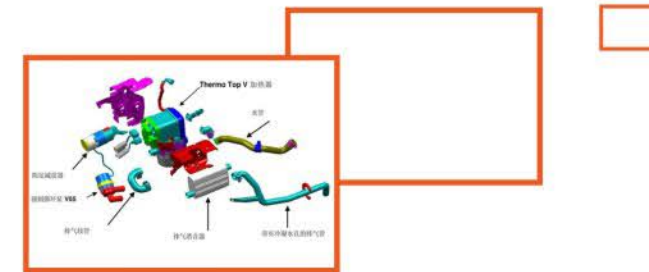

- Part No. CON0450C**
- Packing:450ml (10.0oz) x 12pc/carton.
 - Measure:27.5 x 21.5 x 20.5cm
 - Weight:5.0kgs

STARTING FLUID

El fluido de arranque

VISBELLA Auxiliary starting aid is a special additive with high ether concentration that makes the engine work when low temperature conditions or humidity prevents the engine from a cold start.

APPLICATIONS


- It is designed to be used in engines like: two- and four-stroke gasoline, Diesel with no glow plug and also for industrial engines (mower, leaf blower, chain saw, etc.)
- Do not use in engines with electric air heaters.

INSTRUCTIONS

With the engine off spray the Auxiliary Starting in the engine entry air system for a short period of 2 or 3 seconds; then, start the engine immediately until reaching a stable driving.

PROPERTIES

- Ensures the cold start for diesel, gasoline and dual engines(NGV, LPG).
- Decreases the wear of the starting system.
- Increases the accumulator's life.

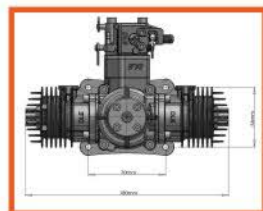

Part No. STA0450C

- Packing: 450ml (9.0oz) x 12pc/carton.
- Measure: 27.5 x 21.5 x 20.5cm
- Weight: 5.0kgs

SPRAY DESMOLDANTE

MOULD SPRAY has effective silicone with great molecular weight. It does not stain. Its development is focus on mould action in high temperature and injection, thermoplastics, polymers, threads and bands process.

The best adherence on leather, textiles, paper and print industries.

USES

Applies some MOULD SPRAY on a clean surface between 25 to 30 cm distance. Do not waste or exceed.

PRECAUTION

- Keep out of the reach of children.
- Aspiration hazard. Do not induce vomiting. Get medical attention.
- Keep away from open flames or heat. Do not store above 50°C or in direct sunlight.



Part No. DES0450C

- Packing: 450ml (10.0oz) x 12pc/carton.
- Measure: 27.5 x 21.5 x 20.5cm
- Weight: 5.0kgs

TIRE SEALER INFLATOR

DESCRIPTION

VISBELLA tyre repair sealant and inflator is an easy to use emergency tyre product with a generic valve connector. Simply follow the step by step instructions to quickly repair punctures and small leaks within seconds. It's 100% applicable to 6mm punctures. Nasca's tyre repair is ideal for cars, quads, caravans, bikes and trailers.

FEATURES


- Repairs punctures and leaks by sealing the hole from the inside.
- Re-inflates tyre to enable immediate driving.
- Easy to use.
- No jack or wheel spanner required.
- Quick, convenient and safe.
- No corrosion and damage to the tyre or rim.
- No messing of hands.

APPLICATION

- Move tyre valve to just before or after the highest point.
- If possible, remove object causing leak.
- Deflate tyre completely.
- Shake Nasca's (name of product) can well.
- Connect end of connector to the tyre valve.
- Turn switch to "ON" position to mend and inflate tyre.
- Vehicle should be driven immediately.

WARNING:

Keep out of reach from children.
Store below 50 degrees.
Harmful if swallowed.
Extremely flammable.

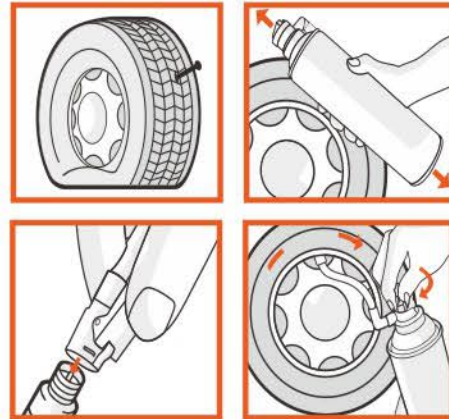

Part No. TS10450C

- Packing: 450ml (10.0oz) x 12pc/carton.
- Measure: 27.5 x 21.5 x 20.5cm
- Weight: 5.0kgs

TIRE FOAMING CLEANER

Tire foma Cleaner

VISBELLA tire foam cleaner is made from high quality raw materials. it can thoroughly remove all sorts of oil stains, dirty marks and prevent the tire from hardening, cracking and fading in color. the tire will look brand new after a few sprayings even without wiping off the bubble, also it can prolong the tire's life and keep it clean, shiny and durable. both wet and dry tires can be applied with this product.

DIRECTIONS

Shake can well before use. Spray in Circular, Sweeping motion at a distance of 15cm. For best result, allow foam to dissolve and penetrate in mins. Wash off any excessive dirt or mud first and wipe off any overspray.

Note

Excessive tire residue or brake dust can spot driveway, To avoid staining, immediately rinse driveway after use. Do not spray on brake rotors of drums, floor mats, motorcycle tires or seats.

CAUTION

contents under pressure, Do not puncture of incinerate container, do not contact with eyes and skin. once contact flush thoroughly with water for 15mins. call a physician if necessary. store in cool place.

KEEP OUT OF REACH OF CHILDREN!



Part No. TIR0600C

- Packing: 600ml (21.0oz) x 12pc/carton.
- Measure: 27.5 x 21.5 x 30 cm
- Weight: 8.5kgs

CHAIN LUBE

Ideal for any chain-driven tool or vehicle such as motorcycles, mopeds, chainsaws, lawnmowers, and bicycles.

DIRECTION:

1. Test spray in a small inconspicuous area.
2. Shake can well before using, then spray directly to the object.

FEATURES:

- All-weather use
- Special dry formula has superior penetrative quality, creating a durable and protective layer
- No messy white residue.

FIRST AID:

Swallowed – Give water (if conscious). Seek medical advice. Do NOT give milk or oil. Do NOT give alcohol.

Skin – Remove contaminated clothing, including footwear. Wash with water and soap.

Eyes – Wash with running water.

Inhalation – Fresh air. Rest, keep warm. If breathing shallow, give oxygen. Medical attention.

KEEP OUT OF REACH OF CHILDREN



Part No. CNL0450C

- Packing: 450ml (10.0oz) x 12pc/carton
- Measure: 26.5 x 20.0 x 20.7cm
- Weight: 4.35kgs

RUBBER COATION SPRAY

STEPS FOR USAGE:

1. Use a towel to scrub and dry the sealant strip
2. Shake the rubber and plastic protective agent onto the sealing strip (you can spray the rubber and plastic protective agent on the towel and wipe the sealing strip evenly with a towel coated with protective agent to save the product and not splash the body. Other parts)
3. Wipe the product evenly with a clean towel.

SCOPE OF USE:

This product is flammable, away from high temperature and fire source, and stored in a cool and ventilated environment.

PRODUCT FUNCTION:

1. Solve the door noise, soften the strip, effectively solve the sealing strip aging caused by the door.
2. Restore seal strip elasticity and gloss while lubricating strip effectively reduces drag.
3. After the elastic recovery of the sealing strip, the sealing property is restored and the sound insulation is protected.

SCOPE OF USE:

1. Door Track Plastic
2. Door Seal
3. The Door Of Plastic
4. Windscreen Plastic
5. Trunk Seal Strip
6. The Trunk Is Plastic



Part No. RCS0450C

- Packing: 450ml (10.0oz) x 12pc/carton
- Measure: 26.5 x 20.0 x 20.7cm
- Weight: 4.25kgs

RADIATOR FLUSH



Specially Formulated For Extended Life Yellow Coolants


DIRECTIONS

Shake bottle well. Relieve cooling system pressure immediately prior to removing the cooling system cap to reduce hot-fluid burn and scalding potentials. With the engine idling, thermostat open and heater on, add contents to the radiator. Recommended for use after a Nasca's Cooling System Flush Service and to correct most radiator leaks between flush services. Use entire contents at once.

NOTE

This product is not intended as a substitute for mechanical repairs. If hoses are old and cracked or brittle, they should be replaced. If corrosion has developed in the cooling system, mechanical repairs will be necessary to prevent coolant loss when the system is under pressure.

KEEP OUT OF REACH OF CHILDREN

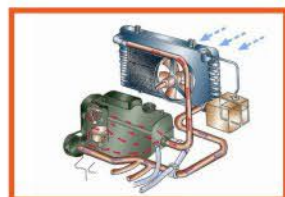

RADIATOR STOP LEAK

It is a sealing product to stop small leaks in the cooling system, with anti-corrosive properties.

DIRECTIONS

Warm up the engine with heater control in HOT position. Shake bottle well and add contents to the cooling system via the expansion tank if part of the system circuit (2 hoses: out and return) or directly into the radiator if a single hose overflow tank is fitted. Top up the system with coolant if required. Run engine for approximately 5 minutes to circulate and stop leaks. Contents treat a cooling system from 5 to 12 litres. If the coolant is dirty, flush system with Wynn's Radiator Flush and refill with new coolant before treatment with Radiator Stop Leak.

APPLICATIONS

Recommended for all "water" cooled systems of petrol, LPG and diesel engines when minor leaks are noted. Can also be used as preventive agent.

KEEP OUT OF REACH OF CHILDREN



Part No. RAD0250C

- Packing: 250ml (5.5oz) x 24pc/carton
- Measure: 44.0 x 29.0 x 15.0cm
- Weight: 7.5kgs

CAR AIR FRESHENER

DESCRIPTION

Visbella® Car Air Freshener has the function to purify the air inside the car and improve the quality with reasonable cost. It is easy to carry and use. Suitable for any types of car to purify inside air.

USAGE

1. Take the car air freshener out of the package. Use only with dry hands.
2. Hang the car air freshener in the right position for the car. It will purify the air improve the quality.



- Part No.:CG0005YW3P**
- Packing: 288pcs/carton
 - Measure(cm): 47.0X33.0X43.0
 - N.W: 7.5kg
 - G.W: 8.5kg



- Part No.:CG0005YW3P**
- Packing: 96pcs/carton
 - Measure(cm): 47.5X42.5X41.0
 - N.W: 4.5kg
 - G.W: 5.5kg



- Part No.:CG0005YW3P**
- Packing: 96pcs/carton
 - Measure(cm): 43.0X39.5X41.0
 - N.W: 5.0kg
 - G.W: 6.0kg



- Part No.:CG0005YW3G**
- Packing: 96pcs/carton
 - Measure(cm): 48.0X36.5X22.0
 - N.W: 6.0kg
 - G.W: 7.0kg



- Part No.:CG0005YW3G**
- Packing: 96pcs/carton
 - Measure(cm): 48.0X36.5X22.0
 - N.W: 6.0kg
 - G.W: 7.0kg



- Part No.:CG0005YW3G**
- Packing: 96pcs/carton
 - Measure(cm): 48.0X36.5X22.0
 - N.W: 6.0kg
 - G.W: 7.0kg



SPRAY PAINT



FEATURES

Aerosol spray paint, the product is made from quick-drying thermoplastic acrylic resin. It can be dried under normal temperature and easy to use. Widely used in advertising industry, surface-treated wood, furniture, vehicles, metal, ABS plastic, glass and automotive, motorcycle surface.


APPLICATION

- Completely remove dust, water stains, and grease from the painted place.
- Fill and level up the sunken part with putty then polish.
- Before spraying, shake the bottle for about two minutes, and to make the paint fully mixed evenly
- Press the valve button with a finger and evenly spray the surface at a distance of 20-30 cm.
- By spraying more times, every two minutes to spray a thin layer can get the better effect.
- Invert the bottle after use, and spray the head till gas was sprayed out, clean the spray mouth to avoid blocking mouth.

WARNING:

FLAMMABLE

- For undefined material, please try to spray on a cloth on a small area, and inspect the effect after 10 minutes.
- During usage, keep the angle between can and level above 45°
- Use in a well-ventilated and dustless area, the paint will achieve the best performance in cool and dry condition. Don't spray in rainy or freezing cold environment.
- Skin and eye irritant! In case of eye contact, flush with clean water, and seek medical attention!
- Combustible! Do not puncture, incinerate, expose or store above 45°C. Keep away from fire or heat source!
- Keep out of reach of children!

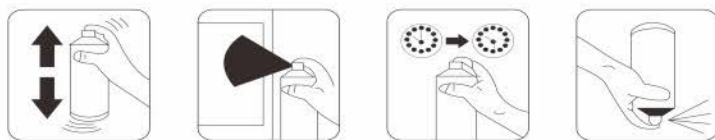

Part No. P0400DRC

- Packing: 400ml (10.0oz) x 12pc/carton.
- Measure: 27.5 x 21.5 x 20.5cm
- Weight: 5.0kgs

Part No. P0400WHC

- Packing: 400ml (10.0oz) x 12pc/carton.
- Measure: 27.5 x 21.5 x 20.5cm
- Weight: 5.0kgs

FLUORESCENT PAINT



FLASHMETALLIC SPRAY PAINT



HIGH HEAT SPRAY PAINT



CHROME/GOLD EFFECT SPRAY PAINT



CARACTERÍSTICAS

pintura en aerosol, el producto está hecho de termoplástico acrílico de secado rápido. Pueden secarse en condiciones normales de temperatura y fácil de usar. Ampliamente utilizado en industrias, sustrato-madera tratada, mobiliario, vehículos, metal, vidrio, plástico ABS y de automoción, motocicleta de la superficie.

APLICACIÓN

- eliminar completamente el polvo, las manchas de agua y de grasa de la pintada.
- Llenado y subir de nivel la parte hundida con putty luego pulido.
- Antes de la pulverización, agite la botella durante unos dos minutos, y para hacer la pintura totalmente mezclada uniformemente
- Pulse el botón de la válvula con un dedo y pulverizar uniformemente la superficie a una distancia de 20-30 cm.
- rociando más veces, cada dos minutos para rociar una capa delgada puede obtener el mejor efecto.
- Invertir el frasco después de su uso, y rociar la cabeza hasta que el gas fue pulverizado, limpiar la boca de pulverización para evitar el bloqueo de la boca.

ADVERTENCIA:

Inflamable

- Para material indefinido inflamable, intente spray sobre un paño en una zona pequeña, e inspeccionar el efecto después de 10 minutos.
- Durante el uso, mantener el ángulo entre la CAN y el nivel por encima de 45°
- utilizar en un lugar bien ventilado y zona libre de polvo, la pintura logre el mejor rendimiento en estado fresco y seco. No pulverizar en lluvia o frío gélido ambiente.
- irritante de la piel y de los ojos! En caso de contacto con los ojos, se debe enjuagar con agua limpia y acudir a un médico!
- Combustible! No perforar, incinerar, exponer o almacenar por encima de 45°C. Manténgase alejado del fuego o fuente de calor!
- Mantener fuera del alcance de los niños!



**NORMAL
SPRAY
PAINT**



* THE COLOR FOR REFERENCE ONLY

**FLUORESCENT
SPRAY
PAINT**




**METALLIC
SPRAY
PAINT**




**HEAT
RESISTANT
SPRAY PAINT**

Can make different color of high-temperature paint according to customers' requirement, above 300°C high temperature paint(300°C/500°C/600°C/800°C)

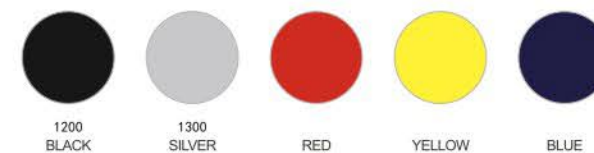

**GOLD EFFECT
CHROME EFFECT
SPRAY PAINT**

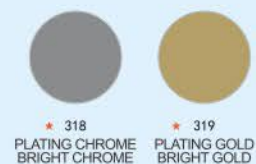

**ZINC
GALVANIZING
SPRAY PAINT**

