

目录 CONTENTS

1BZD液压对置重耙.....01	1LS-220Y手扶铧式犁.....17
1BQX系列悬挂轻耙.....02	液压翻转犁.....18
对置轻耙.....03	轻型液压翻转犁.....18
1BJX系列悬挂中耙.....04	中型液压翻转犁.....18
对置中耙.....05	重型液压翻转犁.....18
对置重耙.....06	1GQN系列旋耕机.....19
拖拉式偏置重耙.....07	喷雾器.....20
圆盘犁.....08-11	2BYSF系列精密玉米施肥播种机.....21
轻型圆盘犁.....08	2BYF系列玉米施肥播种机.....22
重型圆盘犁.....09	2BFX系列小麦施肥播种机.....23
重型管子犁.....10	2BX系列小麦播种机.....23
双向圆盘犁.....10	箱式平地机.....24
驱动圆盘犁.....11	4U系列马铃薯、花生收获机械.....25-27
3Z系列中耕机.....12	2CM系列马铃薯种植机.....27
3ZS系列中耕机.....12	单轴拖车.....28
3ZT系列弹簧中耕机.....13	1W系列挖坑机.....29
3ZY系列中耕机.....14	轻型割草机.....30
3S系列深耕机.....14	割搂一体机.....30
轻型铧式犁.....15	撒播机.....31
中型铧式犁.....15	3QL系列开沟起垄机.....32
重型铧式犁.....16	3Z系列可调式起垄机.....33
超重型铧式犁.....16	开沟机.....34
1LS系列手扶铧式犁.....17	农机配件.....35-37

1BZD 液压对置重耙

1BZD SERIES OF HYDRAULIC OPPOSED HEAVY DUTY DISC HARROW

型号 Models	单位 Unit	1BZD-7.0 50blade opposed heavy duty disc harrow
重量 Weight	kg	12000
耙片直径 Dia. of blades	inch/mm	36 × 12
耕幅 Working width	m	7
耙架尺寸 Frame dimension	m	2.5 × 5.5 × 0.6
整机尺寸 Overall dimension	m	8 × 7.3 × 1.6
配套动力 Matched power	hp	400-500



P 产品介绍

Product introduction

1BQX系列悬挂轻耙

1BQX SERIES MOUNTED LIGHT-DUTY DISC HARROW

1BQX系列悬挂轻耙适用于播前整地、疏松土壤、土肥混合、轻质土壤的灭茬作业，为农作物的种植准备苗床。

1BQX series mounted light-duty disc harrow are suitable for pulverized loosening clods after ploughing and for planning the land before sowing on cultivated land. The machine can make soil and fertilizer mix up and clear away the stump of plants on light soil and preparing seed bed for planting.

型号 Models	单位 Unit	1BQX-1.1	1BQX-1.3	1BQX-1.5	1BQX-1.7	1BQX-1.9	1BQX-2.2	1BQX-3.4	
耕幅 Working width	mm	1100	1300	1500	1700	1900	2200	3400	
最大耕深 Max. working depth	cm	10	10	14	14	14	14	14	
圆盘数量 No. of disc	pcs	12	14	16	18	20	24	42	
圆盘直径 Dia. of disc	mm	460	460	460	460	460	460	460	
重量 Weight	kg	200	220	240	260	290	350	1108	
挂接形式 Linkage		三点悬挂 Three-pointed mounted							液压牵引 Hydraulic traction
配套动力 Matched power	hp	12-15	15-18	25-30	30-35	35-40	55-60	80-100	



14片轻耙



20片轻耙



1BQX-1.3



对置轻耙

OPPOSITE LIGHT DUTY DISC HARROW

该系列圆盘耙结合国外技术研制生产，主要适用于耕后碎土、播前整地、疏松土壤、土肥混合等作业。具有结构合理、坚固耐用、使用方便、保养易行、消除拖拉机偏牵引力等特点。

This series machine is designed and manufactured by our company with the foreign technology, mainly used for crushing and loosening the soil after tillage, planning the field before seeding and mixing the soil and fertilizer, etc. It features on reasonable structure, firmness for long-lasting operation, easiness to be handled and maintained, even field after tillage without defective trailed force and so on.

型号 Models	单位 Unit	1BQDX-1.0	1BQDX-1.4	1BQDX-1.8	1BQDX-2.2	1BQDX-2.6	1BQDX-3.0	1BQDX-3.4
重量 Weight	kg	280	340	400	470	540	610	690
配套动力 Matched power	hp	12-15	25-30	45-50	55-60	60-75	75-85	85-95
耕幅 Working width	mm	1000	1400	1800	2200	2600	3000	3400
耕深 Working depth	mm	100-150						
耙片数量 No. of blades	pcs	12	16	20	24	28	32	36
耙片直径 Dia. of blades	inch/mm	18 / 460						
挂接方式 Linkage		三点悬挂 Three-pointed mounted						



1BQDX-1.0



1BQDX-1.4



1BQDX-1.8



1BQDX-2.6

P 产品介绍 Product introduction

1BJX系列悬挂中耙 1BJX SERIES MOUNTED MID-SIZE DISC HARROW

1BJX系列悬挂中耙常采用前耙组缺口耙片，后耙组采用圆盘耙片。适用于旱田熟地耕前灭茬、耕后碎土和轻质土壤的以耙代耕。我们生产的该耙系列耙片都是采用的优质材质，质量好，使用时间长。整机外观线条美观，色彩多样，品种齐全，适合不同马力四轮拖拉机的配带。

The 1BJX series mounted mid-size disc harrow is mainly applicable for breaking up the clods of farmland(light and medium soil) after furrow,loosening soil and mixing soil and fertilizer before sewing.It has the fetures of simple structure,strong ability and ground flat after working and it can meet the requirements of intensive cultivations.

型号 Models	单位 Unit	1BJX-1.7	1BJX-2.0	1BJX-2.2	1BJX-2.4	1BJX-2.5	1BJ-4.4
重量 Weight	kg	400	434	463	604	760	1850
配套动力 Matched power	hp	40	50-60	55-65	65-70	70-80	80-120
耕幅 Working width	mm	1700	2000	2200	2400	2500	4400
耕深 Working depth	mm	140-160					
耙片数量 No. of blades	pcs	16	18	20	22	24	40
耙片直径 Dia. of blades	inch/mm	22 / 560					
挂接方式 Linkage		三点悬挂 Three-pointed mounted					液压牵引 Hydraulic traction



1BJ-4.4



1BJX-1.7



1BJX-2.0 18片中耙



1BJX-2.2



1BJX-2.5



1BJX-2.4

对置中耙 OPPOSITE MIDDLE-DUTY DISC HARROW

型号 Models	单位 Unit	1BJDX-2.6	1BJDX-3.0	1BJDX-3.6	1BJDX-4.0
重量 Weight	kg	590	660	730	800
配套动力 Matched power	hp	55-60	60-75	75-85	80-90
耕幅 Working width	mm	2600	3000	3600	4000
耕深 Working depth	mm	140			
耙片数量 No. of blades	pcs	24	28	32	36
耙片直径 Dia. of blades	inch/mm	22 / 560			
挂接方式 Linkage		三点悬挂 Three-pointed mounted			



P 产品介绍 Product introduction

对置重耙 OPPOSITE HEAVY DUTY DISC HARROW

1BZD系列对置重耙主要适用于160马力以上大型拖拉机，此产品由我厂自行研发设计，并实地检验。此型号坚固可靠，适用于硬质土地，也可用于开荒。

1BZD series opposite heavy duty disc harrow are suitable for more than 160hp tractor, This models is designed and developed by our factory, and passed field inspection. This models firm and strong enough, especially suitable for hard soil and open up wasteland.

型号 Models	单位 Unit	1BZD-2.6	1BZD-3.0	1BZD-3.3	1BZD-4.0	1BZD-4.4	1BZD-4.8
耕幅 Working width	mm	2600	3000	3300	4000	4400	4800
耕深 Working depth	mm	220-250					
重量 Weight	kg	2050	2450	2650	3000	3200	3500
配套动力 Matched power	hp	80-100	100-120	120-140	140-160	160-180	180-200
耙片数量 No. of blades	pcs	24	28	32	36	40	44
耙片直径 Dia. of blades	inch/mm	26 / 660					
挂接方式 Linkage		液压牵引 Hydraulic traction					



1BZD-4.4

拖拉式偏置重耙 TRAILED TYPE HEAVY DUTY OFFSET DISC HARROW

1BZ系列重耙采用国际先进设计理念，以钢结构为耙架主体，配液压升降轮胎，弹簧调平机构等设备，具有坚固耐用、运输方便、维修保养简便等优势。特别适用于大型农场的土地耕作。

1BZ series heavy duty disc harrow adopt international advanced design ideas, using rigid steel main body, hydraulic transport tire, spring leveling equipment. Strong and durable, convenient transportation, easy maintenance, especially suitable for large farm.

型号 Models	单位 Unit	1BZ-2.0	1BZ-2.2	1BZ-2.6	1BZ-3.0	1BZ-3.4	1BZ-3.8	1BZ-4.2	1BZ-8.0
重量 Weight	kg	1250	1350	1500	1600	1900	2100	2300	4800
配套动力 Matched power	hp	65-80	70-80	90-100	100-110	110-120	130-140	150-160	250-280
耕幅 Working width	mm	2000	2200	2600	3000	3400	3800	4200	8000
耕深 Working depth	mm	200-250							
耙片数量 No. of blades	pcs	18	20	24	28	32	36	40	72
耙片直径 Dia. of blades	inch/mm	26/660							



1BZ-8.0

P 产品介绍

Product introduction

圆盘犁 DISC PLOW

圆盘犁是一种全悬挂式农机，专用于拖拉机上使用，是铧式犁的升级品种，作业时犁片旋转运动，用来破碎土块、翻耕、灭茬。能够切断作物根茎，打碎土层中的砖块，特别适用于杂草丛生的荒地开垦。它结构简单，安装简易，作业质量好，广受欢迎。圆盘犁主要分为1LYQ系列、1LY系列、1LYX系列、1LY(sx)系列，根据不同土质和拖拉机，配备不同型号的产品。

Disc plough is mounted on tractor machine. It is upgraded from furrow plow. The disc is turning when working, have good crumbling soil, turn over and stubble ability. It able to cut rootstock, broke brick. It is suited to land reclamation. And it struction is easy, set up is easy also, working good, broadly by the farmer. disc plough has 1LYQ series, 1LY series, 1LYX series, 1LY(sx) series. according to different soil and tractor, matching different models.

轻型圆盘犁 LIGHT DUTY DISC PLOUGH

型号 Models	单位 Unit	1LYQ-220	1LYQ-320	1LYQ-420
重量 Weight	kg	160	180	210
配套动力 Matched power	hp	18-20	20-30	35-40
挂接方式 Linkage		三点悬挂 Three-pointed mounted		
耕幅 Working width	cm	40	60	80
耕深 Working depth	cm	18-20		
犁片数量 Disc blade quantity	pcs	2	3	4
犁片直径 Disc blade diameter	inch/mm	20/510		
犁片厚度 Disc blade thickness	mm	4		



左图：1LYQ-320

右图：1LYQ-420

重型圆盘犁 HEAVY DUTY DISC PLOUGH

型号 Models	单位 Unit	1LY-325	1LY-425	1LY-525
重量 Weight	kg	410	470	530
配套动力 Matched power	hp	50-60	65-80	90-100
挂接方式 Linkage		三点悬挂 Three-pointed mounted		
耕幅 Working width	cm	75	100	125
耕深 Working depth	cm	20-25		
犁片数量 Disc blade quantity	pcs	3	4	5
犁片直径 Disc blade diameter	inch/mm	26/660		
犁片厚度 Disc blade thickness	mm	6		



左图：1LY-425

右图：1LY-525



P 产品介绍

Product introduction

重型管子犁 HEAVY-DUTY TUBE DISC PLOUGH

型号 Models	单位 Unit	1LYX-230	1LYX-330	1LYX-430
重量 Weight	kg	320	400	490
配套动力 Matched power	hp	40-50	60-75	80-100
挂接方式 Linkage	三点悬挂 Three-pointed mounted			
耕幅 Working width	cm	60	90	120
耕深 Working depth	cm	25-30		
犁片数量 Disc blade quantity	pcs	2	3	4
犁片直径 Disc blade diameter	inch/mm	26/660		
犁片厚度 Disc blade thickness	mm	6		



1LYX-230



1LYX-330



1LYX-430

双向圆盘犁 REVERSIBLE DISC PLOUGH



型号 Models	单位 Unit	1LY (sx)-325	1LY (sx)-425
重量 Weight	kg	645	750
配套动力 Matched power	hp	75-90	90-100
挂接方式 Linkage	三点悬挂 Three-pointed mounted		
耕幅 Working width	cm	75	100
耕深 Working depth	cm	20-25	
犁片数量 Disc blade quantity	pcs	3	4
犁片直径 Disc blade diameter	inch/mm	26/660	
犁片厚度 Disc blade thickness	mm	6	

驱动圆盘犁 DRIVE DISC PLOUGH

机型 Models	单位 Unit	1LYD-320	1LYD-420	1LYD-520	1LYD-522	1LYD-622	1LYD-722	1LYD-822	1LYD-922	
配套动力 Matched power	hp	12-18	18-25	25-30	35-45	40-50	50-60	60-70	70-80	
耕幅 Working width	cm	66	88	110	110	132	154	176	198	
犁片直径 Disc blade diameter	mm	500	500	500	560	560	560	560	560	
耕深 Working depth	cm	12-20								
输出轴转速 Output speed	r/min	540-740								
行进速度 Working speed	km/h	3-4								
耗油量 Oil cost	kg/acre	0.60-0.75								
可调节倾斜角范围 Adjustable range of machines' dilation angle		±5°								
重量 Weight	kg	216	240	276	300	321	357	393	430	
外型尺寸 O.D.	长 (L)	mm	855	965	1075	1075	1210	1325	1440	1555
	宽 (W)	mm	1145	1365	1585	1585	1805	2025	2245	2465
	高 (H)	mm	1050	1050	1050	1050	1050	1050	1050	1050



产品介绍 Product introduction

3Z系列中耕机 3Z SERIES OF CULTIVATOR

3Z系列中耕机可适用于玉米、大豆、棉花、薯类等作物的田间中耕作业，能够一次完成中耕、深松、开沟、起垄等农作作业，具有行距调整方便、深度控制灵活、起垄宽度调整便捷、适应范围广等特点。

3Z series of cultivator can be suitable for cultivating in the field of corn, soybean, cotton and sweet potato etc, and can also complete cultivation, soil deep-loosening, furrowing, and ridging, etc. at the same. It has features on conveniently adjusted row spacing, flexible depth control, simple and convenient ridging width adjustment, wide applying range and so on.

型号 Models	单位 Unit	3Z-2	3Z-3	3Z-4
工作宽度 Working width	mm	1500	2900	3700
犁尖齿数 No. of plow tips	pcs	3	4	5
中耕行数 Cultivation rows	rows	3	4	5
起垄行数 Ridging rows	rows	2	3	4
适应垄距 Ridge spacing	mm	450-600		
配套动力 Matched power	hp	20-30	35-45	45-55
整机重量 Total weight	kg	95	115	140
悬挂方式 Linkage		三点悬挂 Three-pointed mounted		



左图：3Z-2

右图：3Z-3

3ZS系列中耕机 3ZS SERIES OF CULTIVATOR

该系列中耕机可以执行准备苗床、土壤通风、除草等多种田间作业。该机采用S型弹齿，具有弹性好、强度高、适应性强等特点。

This series cultivator can work to prepare seedbeds, soil ventilation, weeding and other farm work. It adopts S-type spring tine, with good elasticity, high strength, strong adaptability features and so on.

型号 Models	单位 Unit	3ZS-1.5	3ZS-1.8	3ZS-2.1
工作宽度 Working width	mm	1500	1800	2100
齿数 No. of S-tines	pcs	9	11	13
整机重量 Total weight	kg	120	140	170
悬挂方式 Linkage		三点悬挂 Three-pointed mounted		



3ZT系列弹簧中耕机 3ZT SERIES OF SPRING CULTIVATOR

3ZT系列双弹簧中耕机是我公司根据国际市场的需求而研制开发的新型中耕机，该机采用双弹簧拉紧装置，当中耕机在工作过程中犁尖遇到障碍物时能自动弹起，越过后迅速恢复原来工作状态，从而起到保护犁尖的作用。该机具有行距调整方便、深度调整易行的特点。可适用于玉米、棉花、豆类的中耕松土作业。

The 3ZT series of spring cultivator is developed by our company according to the demand of foreign market. This machine adopts double-spring tension device which enables the tines bounce automatically during operation when meet with obstacles and return to normal working quickly after over them, by which the tines are protected. It has advantages of row spacing to be conveniently adjusted and the depth to be easily controlled. The machine is suitable for cultivating and loosening soil in the corn, cotton, and beans field.

型号 Models	单位 Unit	3ZT-1.0	3ZT-1.4	3ZT-1.8	3ZT-2.2
工作宽度 Working width	mm	1000	1400	1800	2200
犁尖数量 No. of plowbody	pcs	5	7	9	11
工作深度 Working depth	mm	100-200			
整机重量 Total weight	kg	260	300	350	420
配套动力 Matched power	hp	25	30-40	40-50	50-70
悬挂方式 Linkage		三点悬挂 Three-pointed mounted			



P 产品介绍


Product introduction

3ZY系列中耕机 3ZY SERIES OF CULTIVATOR

该机可适用于玉米、棉花、豆类、番薯类等作物的田间中耕、深松、除草、起垄作业。具有行距可调，深松、起垄更换方便的特点。

It can be used to cultivate, subsoil, weed, ridge in the field of corn, cotton, beans, potato and so on. It has the advantages of adjustable row spacing, conveniently changeable between deep loosening and ridging.

型号 Models	单位 Unit	3ZY-1.2	3ZY-2.0	3ZY-2.8
耕幅 Working width	mm	1200	2000	2800
犁腿数 No. of legs	pcs	2	3	4
耕深 Working depth	mm	100-240		
行距 Row spacing	mm	500-800		
整机重量 Total weight	kg	150	210	290
配套动力 Matched power	hp	25	40	50-60



3S系列深耕机 3S SERIES OF SUBSOILER

3S系列深耕机主要适用于薯类、豆类、棉花的田间深耕作业，具有破除地表土壤板结、疏松土壤、保持地下水、灭茬的作用。具有深度可调、适应范围广、挂接方便等特点。

3S series of subsoiler is mainly suitable for subsoiling in the field of potato, beans, cotton and can break surface soil harden, loosen soil, retain water underground, and clean stubble. It has advantages of adjustable depth, wide range of applying, convenient suspension and so on.

型号 Models	单位 Unit	3S-1.0	3S-1.4	3S-1.8	3S-2.1	3S-2.6
工作宽度 Working width	mm	1000	1400	1800	2100	2600
犁体数量 No. of plowbody	pcs	5	7	9	11	13
工作深度 Working depth	mm	100-240				
整机重量 Total weight	kg	240	280	320	370	450
配套动力 Matched power	hp	25-30	30-40	50-60	70-80	80-90
挂接方式 Linkage		三点悬挂 Three-pointed mounted				



左图：3S-1.4

右图：深耕机

轻型铧式犁 LIGHT DUTY FURROW PLOW

型号 Models	单位 Unit	1L-220	1L-320	1L-420	1L-520
重量 Weight	kg	72	118	130	225
配套动力 Matched power	hp	12-18	18-22	25-30	30-35
挂接方式 Linkage		三点悬挂 Three-pointed mounted			
耕幅 Working width	cm	40	60	80	100
耕深 Working depth	cm	20-22			
犁体数量 No. of plowbody	pcs	2	3	4	5



1L-320



1L-425



1L-625

中型铧式犁 MID-DUTY FURROW PLOW

型号 Models	单位 Unit	1L-225	1L-325	1L-425	1L-525	1L-625
重量 Weight	kg	120	180	240	320	400
配套动力 Matched power	hp	28-30	30-45	40-50	60-65	70-75
挂接方式 Linkage		三点悬挂 Three-pointed mounted				
耕幅 Working width	cm	55	80	110	130	170
耕深 Working depth	cm	20-22				
犁体数量 No. of plowbody	pcs	2	3	4	5	6

P 产品介绍 Product introduction

重型铧式犁 HEAVY DUTY FURROW PLOUGH

型号 Models	单位 Unit	1L-330	1L-430	1L-530	1L-630
重量 Weight	kg	280	390	510	620
配套动力 Matched power	hp	50-65	70-80	80-100	100-120
挂接方式 Linkage		三点悬挂 Three-pointed mounted			
耕幅 Working width	cm	110	135	160	180
耕深 Working depth	cm	28-30			
犁体数量 No. of plowbody	pcs	3	4	5	6



1L-430



1L-435



1L-530

超重型铧式犁 EXTRA-HEAVY DUTY FURROW PLOUGH

型号 Models	单位 Unit	1LZ-335	1LZ-435	1LZ-535	1LZ-635	1LZ-735
重量 Weight	kg	390	560	610	780	910
配套动力 Matched power	hp	60-70	80-100	100-120	120-130	140-160
挂接方式 Linkage		三点悬挂 Three-pointed mounted				
耕幅 Working width	cm	120	145	180	220	250
耕深 Working depth	cm	30-32				
犁体数量 No. of plowbody	pcs	3	4	5	6	7

1LS系列手扶铧式犁 1LS SERIES OF WALKING TRACTOR FURROW PLOUGH

该铧式犁主要配套8-15马力的手扶拖拉机，使用简单轻便，易维修。

The bottom plow is main matched with 8 to 15 horsepower walking tractor, the use of simple portable, easy maintenance.

型号 Models	单位 Unit	1LS-120	1LS-220
犁体数量 No. of plowbody	pcs	1	2
单体幅宽 Single width of plowbody	mm	200	
耕幅 Working width	mm	200	400
耕深 Working depth	mm	180-200	
整机重量 Total Weight	kg	40	60
配套动力 Matched power	hp	8-15	
挂接形式 Linkage		牵引 Traction	



1LS-220Y手扶圆盘犁 1LS-220Y WALKING TRACTOR DISC PLOUGH

该圆盘犁主要配套8-15马力的手扶拖拉机，使用简单轻便，易维修。

The disc plow is main matched with 8 to 15 horsepower walking tractor, the use of simple portable, easy maintenance.

型号 Models	单位 Unit	1LS-220Y
耕幅 Working width	mm	400
最大耕深 Max. working depth	mm	100
圆盘数量 No. of disc	pcs	2
圆盘直径 Dia. of disc	mm	410
重量 Weight	kg	75
挂接形式 Linkage		牵引 Traction
配套动力 Matched power	hp	8-15



P 产品介绍

Product introduction

轻型液压翻转犁 LIGHT DUTY REVERSIBLE FURROW PLOUGH

型号 Models	单位 Unit	1LF-225	1LF-325	1LF-425	1LF-525	1LF-625
重量 Weight	kg	350	420	550	720	840
配套动力 Matched power	hp	25-35	30-45	60-70	75-90	100-110
挂接方式 Linkage		三点悬挂 Three-pointed mounted				
耕幅 Working width	cm	55	80	105	130	160
耕深 Working depth	cm	25-28				
犁体数量 No. of plowbody	pcs	4	6	8	10	12



1LF-425

中型液压翻转犁 MID-DUTY REVERSIBLE PLOUGH

型号 Models	单位 Unit	1LF-230	1LF-330	1LF-430	1LF-530	1LF-630	1LF-730
重量 Weight	kg	580	680	780	880	1090	1300
配套动力 Matched power	hp	40-50	50-70	60-80	90-120	130-160	150-180
挂接方式 Linkage		三点悬挂 Three-pointed mounted					
耕幅 Working width	cm	60	90	120	150	190	220
耕深 Working depth	cm	25-30					
犁体数量 No. of plowbody	pcs	4	6	8	10	12	14



左图: 1LF-230

右图: 1LF-730

重型液压翻转犁 HEAVY DUTY REVERSIBLE FURROW PLOUGH

型号 Models	单位 Unit	1LF-335	1LF-435	1LF-535	1LF-635
重量 Weight	kg	720	840	960	1300
配套动力 Matched power	hp	70-80	80-100	100-120	150-180
挂接方式 Linkage		三点悬挂 Three-pointed mounted			
耕幅 Working width	cm	120	150	180	210
耕深 Working depth	cm	30-35			
犁体数量 No. of plowbody	pcs	6	8	10	12




左图: 1LF-335

右图: 1LF-435

1GQN系列旋耕机 1GQN SERIES ROTAVATOR

型号 Models	单位 Unit	1GQN-80	1GQN-100	1GQN-120	1GQN-150	1GQN-180	1GQN-200	1GQN-250	1GQN-300
重量 Weight	kg	175	192	205	230	405	420	450	490
配套动力 Matched power	hp	15-18	15-20	20-25	25-30	50-55	55-75	75-90	90-100
耕刀数量 No. of blades	pcs	18	22	26	34	42	46	58	70
耕幅 Working width	cm	80	100	120	150	180	200	250	300
耕深 Working depth	cm	120-150							
传动轴转速 PTO input speed	r/min	540/720							

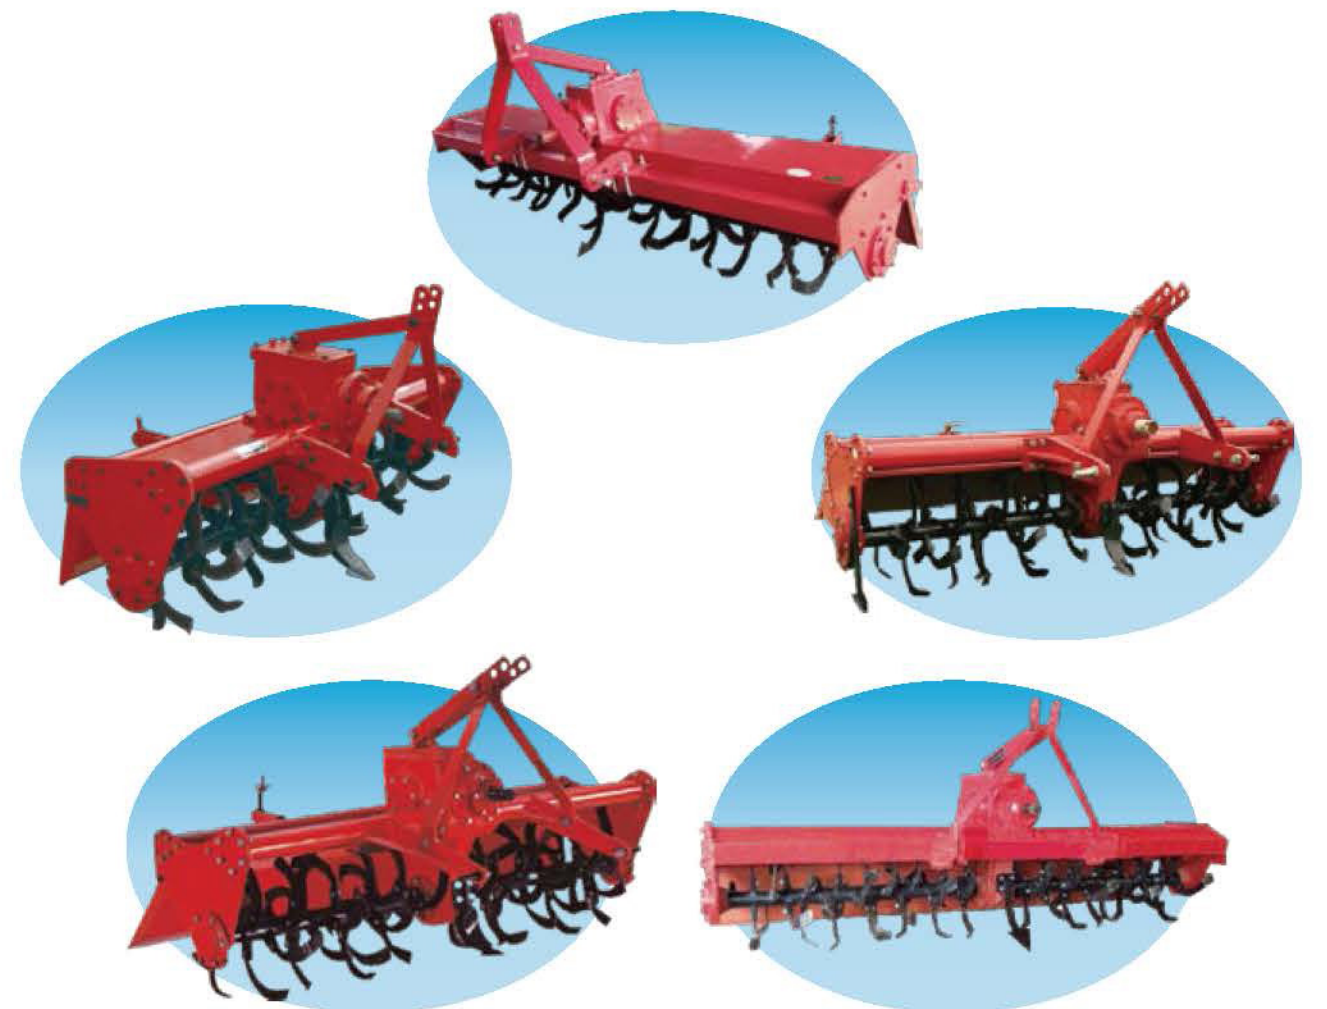

P 产品介绍

Product introduction

喷雾器 BDDM SPRAYER

型号 Models	单位 Unit	3W-200	3W-300	3W-400	3W-500	3W-700	3W-800	3W-1000
药箱容量 Tank capacity	L	200	300	400	500	700	800	1000
喷幅 Spray width	m	6			10			
喷头数量 No. of spray nozzle	pcs	12	12	12	20	20	20	20
配套动力 Matched power	hp	20-30	30-40	40-50	50-55	60-75	75-80	90-100
整机重量 Total weight	kg	230	245	260	280	310	340	380
压力泵型号 Type of pump		MB80	MB80	MB80	MB90	MB90	MB90	MB90
挂接方式 Linkage		三点悬挂 Three-pointed mounted						
喷头产地 Spray nozzle origin		Germany						

型号 Models	单位 Unit	3W-500	3W-700	3W-800	3W-1000
药箱容量 Tank capacity	L	500	700	800	1000
喷幅 Spray width	m	12	12	12	12
喷头数量 No. of spray nozzle	pcs	24	24	24	24
配套动力 Matched power	hp	55-60	60-75	80-90	100
整机重量 Total weight	kg	290	340	380	400
压力泵型号 Type of pump		MB90			
挂接方式 Linkage		三点悬挂 Three-pointed mounted			
喷头产地 Spray nozzle origin		Germany			



2BYSF系列精密玉米施肥播种机 2BYSF SERIES OF PRECISION CORN FERTILIZATION SEEDER

该系列玉米施肥播种机是为15-60马力拖拉机配套的种植机械，适用于平原和丘陵地区玉米的施肥播种。具有通用性能良好、适应范围广、播种均匀等特点。

This series of corn fertilization seeder can be mounted with 15-60hp tractor. It is applicable to the plains and hilly areas of maize seed and fertilizer. It has advantages of favourable universality, wide range of applying, even seeding and so on.

型号 Models	单位 Unit	2BYSF-2	2BYSF-3	2BYSF-4	2BYSF-5	2BYSF-6
整机尺寸 Overall dimension	mm	1440 × 1150 × 980	1440 × 1500 × 980	1440 × 1950 × 980	1440 × 2250 × 980	1440 × 2600 × 980
行数 Rows	row	2	3	4	5	6
行距 Row spacing	mm	428-630	428-600	428-570	428-540	428-510
株距 Plant spacing	mm	Adjustable, 140 / 173 / 226 / 280				
开沟深度 Ditching depth	mm	60-80				
施肥深度 Fertilization depth	mm	60-80				
播种深度 Sowing depth	mm	30-50				
化肥箱容积 Capacity of fertilizer tank	L	42	68	86	86	86
种箱容积 Capacity of seed box	L	8.5 × 2	8.5 × 3	8.5 × 4	8.5 × 5	8.5 × 6
重量 Weight	kg	140	190	270	300	350
挂接形式 Linkage		三点悬挂 Three-pointed mounted				
配套动力 Matched power	hp	12-18	15-25	25-40	40-50	50-60

播种机型号代表意思 2种植和施肥机械 B.播种 Y:玉米 S:齿轮式 | 精密播种机 | F.施肥 执行标准JB/T 10293-2001



3行精密玉米施肥播种机(大小行)



4行精密玉米施肥播种机

P 产品介绍 Product introduction

2BYF系列玉米施肥播种机 2BYF SERIES OF CORN FERTILIZATION SEEDER

该系列玉米施肥播种机是为15-60马力拖拉机配套的种植机械，适用于平原和丘陵地区玉米的施肥播种。具有通用性能良好、适应范围广、播种均匀等特点。

This series of corn fertilization seeder can be mounted with 15-60hp tractor. It is applicable to the plains and hilly areas of maize seed and fertilizer. It has advantages of favourable universality, wide range of applying, even seeding and so on.

型号 Models	单位 Unit	2BYF-2	2BYF-3	2BYF-4	2BYF-5	2BYF-6
整机尺寸 Overall dimension	mm	1440×1150×980	1440×1500×980	1440×1950×980	1440×2250×980	1440×2600×980
行数 Rows	row	2	3	4	5	6
行距 Row spacing	mm	428-630	428-600	428-570	428-540	428-510
株距 Plant spacing	mm	Adjustable, 140 / 173 / 226 / 280				
开沟深度 Ditching depth	mm	60-80				
施肥深度 Fertilization depth	mm	60-80				
播种深度 Sowing depth	mm	30-50				
化肥箱容积 Capacity of fertilizer tank	L	42	68	86	86	86
种箱容积 Capacity of seed box	L	8.5×2	8.5×3	8.5×4	8.5×5	8.5×6
重量 Weight	kg	85	145	220	265	300
挂接形式 Linkage		三点悬挂 Three-pointed mounted				
配套动力 Matched power	hp	12-18	15-25	25-40	40-50	50-60

播种机型号代表意思 2:种植和施肥机械 B:播种 Y:玉米 F:施肥 执行标准:JB/T 10293-2001



2行玉米普通施肥播种机



3行玉米普通施肥播种机



4行普通玉米施肥播种机



6行普通玉米施肥播种机

2BFX系列小麦施肥播种机 2BFX SERIES WHEAT FERTILIZER SEEDER

该系列小麦施肥播种机是为15-100马力拖拉机配套的种植机械，适用于平原和丘陵地区小麦的施肥播种。具有通用性能良好、适应范围广、播种均匀等特点。

This series of wheat fertilization seeder can be mounted with 15-100hp tractor. It is applicable to the plains and hilly areas of wheat seed and fertilizer. It has advantages of favourable universality, wide range of applying, even seeding and so on.

型号 Models	单位 Unit	2BFX-9	2BFX-12	2BFX-14	2BFX-16	2BFX-18	2BFX-24
配套动力 Matched power	hp	15-18	15-30	18-30	50	60-80	70-100
净重 Net weight	kg	220	285	310	650	680	1080
播种幅宽 Seeding width	mm	1350	1800	2100	2400	2700	3600
播种行数 Seeding rows	row	9	12	14	16	18	24
基本行距 Row spacing	mm	150	150	150	150	150	150
播种深度 Seeding depth	mm	40-80					
挂接方式 Linkage		三点悬挂 Three-pointed mounted					



2BX系列小麦播种机 2BX SERIES WHEAT SEEDER

该系列小麦播种机是为15-100马力拖拉机配套的种植机械，适用于平原和丘陵地区小麦的播种。具有通用性能良好、适应范围广、播种均匀等特点。

This series of wheat seeder can be mounted with 15-100hp tractor. It is applicable to the plains and hilly areas of wheat seed. It has advantages of favourable universality, wide range of applying, even seeding and so on.

型号 Models	单位 Unit	2BX-9	2BX-12	2BX-14	2BX-16	2BX-18	2BX-24
配套动力 Matched power	hp	15-18	15-30	18-30	50	60-80	70-100
净重 Net weight	kg	190	240	290	510	600	780
播种幅宽 Seeding width	mm	1350	1800	2100	2400	2700	3600
播种行数 Seeding rows	row	9	12	14	16	18	24
基本行距 Row spacing	mm	150	150	150	150	150	150
播种深度 Seeding depth	mm	40-80					
挂接方式 Linkage		三点悬挂 Three-pointed mounted					

箱式平地机 BOX SCRAPER

箱式平地机是一种利用刮泥刀平整地面的土方机械。刮刀装在机械前后轮轴之间，能升降、倾斜、回转和外伸。动作灵活准确，操纵方便，平整场地有较高的精密度，适用构筑路基和路面、修筑边坡、开挖边沟，也可搅拌路面混合料、清扫积雪、推送散粒物料以及进行土路和碎石路的养护工作。

Box scraper fitted between front and back rear wheels to unknot land, can lift, slop, revolve and extend, flexible and accurate, easy to use, it is applicable for construction of roadbed and road surface, side ditch, mixing road mixtures, removing snow, transporting grain materials, maintenance of dirt road and gravel roads, etc.

型号 Models	单位 Unit	SBX-4	SBX-5	SBX-6	SBX-7	SBX-8
耕幅 Working width	mm	1220	1530	1830	2135	2440
箱刀的深度 Box knife depth	mm	547	547	547	547	547
配套动力 Matched power	hp	18-25	20-30	25-40	30-40	35-50
重量 Weight	kg	135	170	205	230	260



4U系列马铃薯、花生收获机械 4U SERIES POTATO, PEANUT HARVEST

该产品性能好，效率高。主要用于收获马铃薯、大蒜、地瓜、花生等地下根茎农作物。具有收获效率高、破损率低、运转轻快无振动、不堵草、漏土快、结构简洁、使用寿命长等特点。该机具已获得国家专利局批准实用新型与外观设计两项专利。

This product is mainly used for harvesting potato, garlic, sweet potato, peanut and other underground rhizome crops. It has the high harvest efficiency, the low breakage rate, the revolution vividly does not have the vibration, it never stops up by the grass, leaks the soil quickly. The structure is simple and the service life is longer. This machine has obtained two patents: The utility model and the outlook design authorized by the national patent office.

4U系列马铃薯收获机技术参数							
型号 Models	4U-1	4U-1A	4U-1B	4UZ-1	4U-2	4U-2B	4U-3
行数 性能	单行 (抛撒)	单行 (配手扶)	单行 (集堆自卸料)	单行 (振动抛撒)	双行 (抛撒)	双行 (集堆自卸料)	双行 (自装车)
行距 (cm)	55-80	50-65	55-80	55-80	55-80	55-80	55-80
生产率 (mu/hr)	3-5			5-8			8-15
整机质量 (kg)	180	100	200	160	700	800	1200
配套动力 (hp)	22-35	8-15	22-35	22-35	50-80	50-80	70-120
工作深度 (cm)	25	20	25	25	25	25	25
工作宽度 (m)	0.60	0.60	0.60	0.60	1.60	1.60	1.60
明薯率 (%)	≥96						
破皮率 (%)	≤2						
动力输出轴转速 (rpm)	560/1250	1000	560/1250	560/1250	560	560	560
外型尺寸 (cm)	180×100×98	90×70×70	240×90×90	120×100×75	230×220×100	280×220×100	330×390×310
包装尺寸 (cm)	165×85×45	85×65×60	165×85×45	150×90×70	220×190×45	220×190×45	285×210×110

P 产品介绍

Product introduction



4U-1

4U-1A

4U-1B

左图: 4UZ-1

右图: 4U-2



左图: 4U-2B

右图: 4U-3



花生收获机械



4H-800花生收获机技术参数

参数名称 Specification	单位 Unit	技术指标
配套动力 Matched power	hp	20-35
工作效率 Work efficiency	m ² /hr	3-5
收获幅宽 Harvest width	m	800
挖掘深度 Digging depth	mm	≥100
埋果率 Buried fruit rate	%	≤3
破果率 Broken fruit rate	%	≤1
蔗茎合格率 Sugarcane diameter percent of pass	%	≥97
挂接形式 Linkage		三点悬挂 Three-pointed mounted
整机重量 Total weight	kg	280

2CM系列马铃薯种植机 2CM SERIES POTATO PLANTER

2CM系列马铃薯种植机系引进国外生产马铃薯机械的先进技术,该机配套20-90马力四轮拖拉机,集开沟、施肥、播种、覆土、震压为一体,可一次完成施肥、播种、镇压作业。

The 2CM series potato planter, introducing the advanced technology for producing potato planter aboard, match the 20-90hp four-wheel tractor and combine ditch, manuring, sowing, casing soil together, it can complete manuring and sowing simultaneously.

型号 Models	单位 Unit	2CM-2 (双垄)	2CM-1 (单垄)	2CM-2A (双垄四行)
整机重量 Total weight	kg	200	180	350
垄距 Row spacing	cm	50-85	-	50-100
株距 Planting distance	cm	18-35	18-35	18-35
作业效率 Working efficiency	m ² /h	0.4-0.6	-	0.6-1
种箱容积 Seed tank capacity	m ³	0.24 × 2	0.24 × 1	0.24 × 2
肥箱容积 Manure tank capacity	m ³	0.08 × 1	0.08 × 1	0.08 × 2
配套动力 Matched power	hp	20-35	20-35	50-90

产品图片
Images

P 产品介绍

Product introduction

单轴拖车 SINGLE AXLE TRAILER

7C系列农用拖车有1.5-3吨，该产品结构简单，经济实用。分为自卸式和非自卸式两种，可配套12-40马力拖拉机。

7C series agricultural trailer has 1.5-3 tons, this series machine simple construction, economy. it has hydraulic dump and non hydraulic dump two kinds, matched 12-40hp tractor.

型号 Models	单位 Unit	7C-1.5	7CX-1.5	7C-2	7CX-2	7C-3	7CX-3
自重 Dead weight	kg	320	380	390	450	580	680
载重 Load weight	kg	1500		2000		3000	
配套动力 Matched power	hp	12-18		12-25		20-40	
整机尺寸 Overall dimension	mm	3000×1300×1700		3150×1550×1880		4150×1650×2000	
卸货形式 Unload form		非自卸 Non hydraulic dump	液压自卸 Hydraulic dump	非自卸 Non hydraulic dump	液压自卸 Hydraulic dump	非自卸 Non hydraulic dump	液压自卸 Hydraulic dump
车厢尺寸 Carriage dimension	mm	2000×1000×450		2100×1500×450		3000×1600×450	
轮胎型号 Tyre type		6.50-16		7.00-16		7.00-16	
轮胎数量 Tyre quantity	pcs	2		2		2	



7CX-2



7C-2



7C-1.5



7CX-3

1W系列挖坑机 1W SERIES POST HOLE DIGGER

该挖坑机配套四轮拖拉机，后动力输出。该机具结构紧凑，性能优良，易于操作，通过更换钻头可以实现多规格的挖坑作业。适用于植树造林、立桩等挖坑作业。

该机具有如下特点：

1. 挖坑工作靠机械动力下挖，负荷能力强、效率高。
2. 钻挖平稳，成坑质量好，挖出的土壤堆在坑边附近。
3. 该机结构紧凑，耐用性强，保养方便。

This post hole digger matched with four wheels tractor, rear power output. This machine structure is compact, good performance, easy to operate, through the bit change can realize many specifications of dig a hole operation. Suitable for afforestation, made pile and dig a hole operation.

This machine has the following feature:

1. Dig a hole work by mechanical power dig under, load ability, high efficiency.
2. Drill dig smooth, into the pit of good quality, digging out the soil pile in the pit near side.
3. This machine structure is compact, durability strong, maintenance is convenient.

型号 Models	单位 Unit	1W-400	1W-500	1W-600	1W-700	1W-800
钻头直径 Drill Diameter	mm	400	500	600	700	800
工作深度 Working depth	mm	400-700	500-800		500-1000	
配套动力 Matched power	kW	22-53	22-53	36.7-55	36.7-55	36.7-55
重量 Weight	kg	230	240	251	260	270
挂接方式 Linkage		三点悬挂 Three-pointed mounted				
工作效率 Productivity	caves/hour	60-120	60-120	60-120	30-60	30-60
运输间隙 Transport clearance	mm	>300				

左图：挖坑机

右图：挖坑机工作图



P 产品介绍 Product introduction

轻型割草机 LIGHT-DUTY LAWN MOWER

9GB-1.4/1.6/1.8/2.1型后置悬挂往复割草机配套12-35马力四轮拖拉机使用, 该机利用偏置式驱动割刀进行作业, 适用于农、林、牧区平坦草场和坡地、丘陵地等不同条件草场, 用于收割天然牧草和种植牧草、紫花苜蓿、芦苇、青储饲料等。

Models 9GB-1.4/1.6/1.8/2.1 lawn mower is mounted by tractor, suitable to 12-35hp tractor, our lawn mower is offset type, is applicable to forage harvesting on pasture, and it is able to cutting alfalfa, reed and so on.

型号 Models	单位 Unit	9GB-1.4	9GB-1.6	9GB-1.8	9GB-2.1
重量 Weight	kg	180	195	210	230
配套动力 Matched power	hp	12-35			
挂接方式 Linkage		三点悬挂 Three-pointed mounted			
割幅 Cutting width	m	1.4	1.6	1.8	2.1
割茬高度 Cutting height	mm	60-80			
工作效率 Working efficiency	ha/h	1.1	1.2	1.3	1.4



9GB-1.8

9GB-1.6

9GB-2.1

割搂一体机 LAWN MOWER AND RAKE MACHINE

型号 Models	单位 Unit	9GBL-1.4	9GBL-1.6	9GBL-1.8	9GBL-2.1
重量 Weight	kg	300	310	315	330
配套动力 Matched power	hp	12-35			
挂接方式 Linkage		三点悬挂 Three-pointed mounted			
割幅 Cutting width	m	1.4	1.6	1.8	2.1
割茬高度 Cutting height	mm	60-80			
工作效率 Working efficiency	ha/h	1.1	1.2	1.3	1.4



9GBL割搂一体机

撒播机 CDR SPREADER

撒播机既用来进行高质量、大面积、高效的播种作业, 又能轻松用于农田耕前撒播底肥、耕后播种及草场、牧场的种肥混合撒播、雪后融雪剂的撒播等作业。该机配套12-50hp四轮拖拉机后置悬挂使用。适用于农、林、牧区平坦耕地、草场、坡地、丘陵等不同条件的地区播种与施肥。该机具有机动性好、结构简单、操作方便、撒播均匀、使用可靠等特点。

The seeder is used for carrying on the big area, high grade and the highly effective sowing seeds work. It is easy to in the farmland and broadcast base fertilizer before plowing and seed after plowing. It also can be used for broadcasting the mixture of seeds and fertilizer in the pasture and thaw medicinal after snow. The machine matches with 12-50hp four wheels tractor and is post-positioned hanging. It is suitable for sowing seeds and broadcasting fertilizer in the smooth farmland of the agricultural area, the forest, the pastoral area, the grass, the land on slopes, the hill and so on. This machine has the features of good organic mobility, simple structure, easy operation, even broadcast sowing and reliable use, etc.

型号 Models	单位 Unit	CDR250	CDR400	CDR600
容量 Capacity	L	250	400	600
重量 Weight	kg	80	90	110
挂接方式 Linkage		三点悬挂 Three-pointed mounted		
配套动力 Matched power	hp	12-30	25-50	25-50
播速 Adjustable speeding	m/s	4-14	4-14	4-14
播幅 Working width	m	15-30	15-30	15-30



P 产品介绍


Product introduction

3QL系列开沟起垄机 3QL SERIES DITCHING RIDGER

3QL系列起垄机主要适用于薯类、豆类、蔬菜类的田间耕后起垄作业，具有垄距、垄高、起垄行数、角度调整方便、配套范围广、适应能力强等特点。

It is mainly used for ridging in the field of potato, beans, vegetables after tillage. It has the advantages of convenient adjustment in ridging spacing, ridging height, ridging rows and angle, wide range of matched tractors, good ability of adaption and so on.

型号 Models	单位 Unit	3QL-3	3QL-4	3QL-5
单犁体耕幅 Single plough body working width	cm	35	35	35
耕幅 Working width	cm	320	460	600
耕深 Working depth	cm	30	30	30
犁体间距 Plough body spacing	cm	100		
配套动力 Matched power	hp	55-80	80-100	100
主架尺寸 Big frame of the size	cm	80 × 100	80 × 100	80 × 100
净重 Net weight	kg	320	410	480

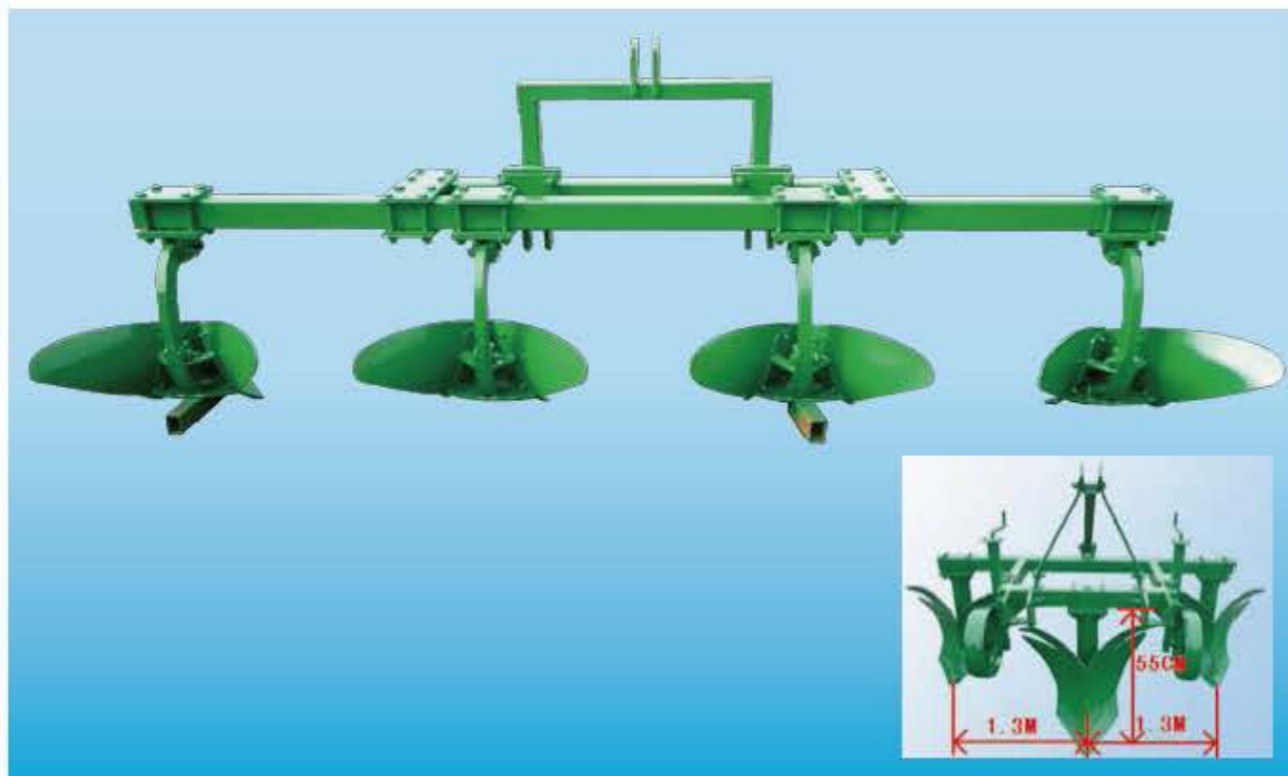

3Z系列可调式起垄机 3Z SERIES ADJUSTABLE RIDGER

3Z系列可调式起垄机主要适用于农田耕后起垄作业。该机采用方管焊接整体式刚性机械架为主体，配以角度可调圆盘起垄器。圆盘犁片采用优质65Mn钢板，经热处理加工制成。该机具有结构合理、坚固耐用、运输方便、便于调整、使用维修方便等特点。

3Z adjustable ridger is mainly used for making ridge in the field after tillage. The main frame is made of rectangular tube welded together, assembled with the angle adjustable disc ridging unit. The discs are made of qualified 65Mn steel plate with heat treatment. The machine is steady and durable, convenient for transport and easy to adjust, operate and maintenance.

型号 Models	单位 Unit	3Z-80	3Z-120	3Z-140	3Z-160	3Z-180	3Z-260
耕幅 Working width	mm	800	1200	1400	1600	1800	2600
起垄宽度 Ridging width	mm	200-450	200-450	200-450	300-500	300-500	300-500
起垄高度 Ridging height	mm	150-240	150-240	150-300	150-300	150-300	150-300
配套动力 Matched power	hp	20	25-30	30-40	50	50-70	70-90
整机重量 Total weight	kg	135	150	165	180	200	350
挂接方式 Linkage		三点悬挂 Three-pointed mounted					



P 产品介绍

Product introduction

开沟机 DITCHING MACHINE

开沟机主要适用于农田水利灌溉渠道、煤气管道、石油管道、自来水管、地下电缆铺设等工程项目中的开沟作业。

Ditching machine is mainly used for farmland ditch, gas pipe, oil pipe, water pipe, underground cable laying project ditch operation.

型号 Models	单位 Unit	1KHL-40	1KHL-50	1KHL-70
耕幅 (可调) Working width (adjustable)	cm	10-30	10-50	30-50
耕深 (可调) Working depth (adjustable)	cm	50-120	50-150	50-230
配套动力 Matched power	hp	15-55	55-75	75-100
工作效率 Working efficiency	m/hr	150-400	150-500	150-700
净重 Net weight	kg	120	340	400



农机配件 AGRICULTURAL MACHINERY PARTS



耙齿



松土铲



左图: 护刃器

右图: S弹尺



左图: 犁尖

右图: 犁头包装

P 产品介绍 Product introduction

耙片 DISC BLADE

耙片主要用于圆盘耙和农用机械设备使用，材质主要是65Mn弹簧钢和40MnB钢两种。65Mn材质的硬度是38-45HRC，40MnB的硬度可以达到43-48HRC。我们可以生产多种规格耙片，最大可以做到直径46英寸（1170mm）耙片。

Disc blade are suitable for disc harrow and agricultural machine, as usual the material is 65Mn spring steel and 40MnB steel. As usual 65Mn spring steel hardness is 38-45HRC, 40MnB steel hardness is 43-48HRC. We are able to producing a lot of kind disc blade, max diameter is 46inch(1170mm).

直径 DIAMETER		厚度 THICKNESS	圆盘 PLAIN	缺口 NOTCHED		平盘 FLAT
inch	mm	mm	重量 Weight (kg)	缺口数量 Notched Nos	重量 Weight (kg)	重量 Weight (kg)
12	305	3	1.6	6	1.4	1.5
13	330	3	1.9	6	1.6	1.8
14	356	3	2.4	6	2.1	2.3
16	406	3	3	8	2.6	2.8
		3.5	3.6		3.2	3.4
		4	4.1		3.7	3.9
18	457	3	3.9	8	3.4	3.5
		3.5	4.3		4	4.1
		4	5.2		5	5.1
20	510	3	4.7	8	4.3	4.4
		3.5	5.6		5.2	5.3
		4	6.5		6	6.2
		4.5	7.4		6.1	6.5
		4	8.4		7.4	7.8
22	560	4.5	9	10	7.7	8.2
		5	10.5		8.7	9.2
		6	12.2		10.2	10.7
		4	9.6		8.2	8.7
24	610	4.5	10.8	10	9.2	9.8
		5	12		10.2	10.8
		6	14.4		12.3	13
		7	16.8		14.3	15
26	660	5	14.3	10	12.2	12.8
		6	17.2		14.6	15.2
		7	20		17	17.5
		8	23		19.6	20.2
28	710	6	19.8	10	17	
		7	23.1		19.6	
		8	26.3		22.4	
		10	33		28.1	
30	760	8	30	10	25.5	
		10	37.5		35.6	
		12	45		38.3	
32	810	8	34.6	12	28.4	
		10	43.3		35.6	
34	860	12	53	12	43.6	
		10	48		40	
38	965	12	58	14	48	
		10	61		50	
42	1010	12	73	14	60	
		10	70		58	
44	1120	12	85	14	70	
		12	115		98	

